ORDER NO. VRD9511M158

Service Manual

Simplified

Video Cassette Recorder

Panasonic S-VHS 625 VHS PAL

Hi-Fi HQ

NV-HS1000 EGC BYP ECP

K-MECHANISM



NV-HS1000

Video Cassette Recorder

Panasonic S-VHS 625 VHS PAL

Hi-Fi HQ

NV-HS800 BY ECC

K-MECHANISM



NV-HS800

Panasonic

© 1995 Matsushita Electric Industrial Co., Ltd.
All rights reserved. Unauthorized copying and
distribution is a violation of law.

NV-HS1000EGC/BYP/ECP

SPECIFICATIONS

ITEM	SPECIFICATION	
POWER	SOURCE: 220−240V AC 50/60Hz	
	CONSUMPTION: 41 watts	
RECORDING SYSTEM	2 rotary heads, helical scanning system	
	PAL	
TV TUNER SYSTEM	NV-HS1000EGC	VHF I: CHN1~CHS10 VHF III: CHE5~CHS41 (PAL/SECAM B) UHF: CH21~CH69 (PAL/SECAM G) 75Ω terminated
	NV-HS1000BYP	UHF CH21~CH69 (PAL I) 75Ω terminated
	NV-HS1000ECP	VHF I: CHE2~CHS3 VHF II: CHM1~CHM9 VHF III: CHM10~CHU2 VHF H: CHU3~CHS41 (PAL B) UHF: CH21~CH69 (PAL G) 75Ω terminated
RF OUT SYSTEM	NV-HS1000EGC	UHF: CH 36±6 (PAL/SECAM G) $70\pm^{+2}_{-3}$dBμ, 75Ω terminated
	NV-HS1000BYP	UHF: CH 36±6CH (PAL I) 73±3dBμ, 75Ω terminated
	NV-HS1000ECP	UHF: CH 36±6CH (PAL G) 70^{+2}_{-3}dBμ, 75Ω terminated
VIDEO	HEADS: 4 rotary heads 1 pair for SP recording, playback and trick play (L-R heads) 1 pair for LP recording, playback and trick play (L′-R′ heads) 1 flying erase head	
	INPUT: EURO AV (AV1, AV2) Connectors (21 pin) 1.0Vp-p, 75Ω unbalanced S-VIDEO IN (AV3) Connector Y: 1.0Vp-p, 75Ω unbalanced C: 0.3Vp-p, 75Ω unbalanced VIDEO IN (AV3) Connector (Phono type) 1.0Vp-p, 75Ω unbalanced	
	OUTPUT: EURO AV (AV1, AV2) Connectors (21 pin) 1.0Vp-p, 75Ω unbalanced S-VIDEO OUT Connector Y: 1.0Vp-p, 75Ω unbalanced C: 0.3Vp-p, 75Ω unbalanced VIDEO OUT Connector (Phono type) 1.0Vp-p, 75Ω unbalanced	

ITEM	SPECIFICATION	
AUDIO	HEAD:	1 stationary head (Normal Audio) 2 rotary heads (Hi-Fi 2CH)
	INPUT:	EURO AV (AV1, AV2) Connectors (21 pin) More than −6dBV (500mV), More than 10kΩ AUDIO IN (AV3) Connector (Phono type) More than −10dBV (316mV), More than 47kΩ MICROPHONE JACK −70dBV
	OUTPUT:	EURO AV (AV1, AV2) Connectors (21 pin) −6dBV (500mV), Less than 1kΩ AUDIO OUT Connector (Phono type) −8dBV (400mV), Less than 1kΩ HEADPHONE JACK −30dBV, 8Ω
	TRACK:	1 track (Normal-mono only) 2 channels (Hi-Fi Sound-Stereo)
TAPE FORMAT	S-VHS, VHS Cassette tape (Tape width 12.7mm)	
TAPE SPEED	SP: 23.39mm/s (PAL), 33.35mm/s (NTSC) LP: 11.695mm/s (PAL), 11.12mm/s (NTSC) Record/Playback Time: SP: 4 hours with 240min. type tape LP: 8 hours with 240min. type tape FF/REW Time: 2.5min. with 180min. type tape	
DIMENSIONS	430(W)×120(H)×398(D) mm	
OPERATING TEMPERATURE	5°C~40°C	
OPERATING HUMIDITY	35%~80%	
WEIGHT	NV-HS1000EGC	7.0kg
	NV-HS1000BYP/ECP	7.4kg
STANDARD ACCESSORIES	1 pc. DIN-RF Cable 1 pc. Infra-red Remote Controller 1 pc. Audio Cables 1 pc. AC Mains Lead 1 pc. EDIT 5 pin Cable 1 pc. S-VIDEO 4P Cable	

Weight and dimensions shown are approximate.
Specifications are subject to change without notice.

NV-HS800BY/ECC

SPECIFICATIONS

ITEM	SPECIFICATION	
POWER	SOURCE: 220−240V AC 50/60Hz	
	CONSUMPTION: 37 watts	
RECORDING SYSTEM	2 rotary heads, helical scanning system	
	PAL	
TV TUNER SYSTEM	NV-HS800BY	UHF: CH21~CH69 (PAL I) 75Ω terminated
	NV-HS800ECC	VHF I: CHE2~CHS3 VHF II: CHM1~CHM9 VHF III: CHM10~CHU2 VHF H: CHU3~CHS41 (PAL B) UHF: CH21~CH69 (PAL G) 75Ω terminated
RF OUT SYSTEM	NV-HS800BY	UHF: CH 36±6CH (PAL I) 73±3dBμ, 75Ω terminated
	NV-HS800ECC	UHF: CH 36±6CH (PAL G) 70^{+2}_{-3}dBμ, 75Ω terminated
VIDEO	HEADS: 4 rotary heads 1 pair for SP recording, playback and trick play (L-R heads) 1 pair for LP recording, playback and trick play (L′-R′ heads) 1 flying erase head	
	INPUT: EURO AV (AV1, AV2) Connectors (21 pin) 1.0Vp-p, 75Ω unbalanced S-VIDEO IN (AV3) Connector Y: 1.0Vp-p, 75Ω unbalanced C: 0.3Vp-p, 75Ω unbalanced VIDEO IN (AV3) Connector (Phono type) 1.0Vp-p, 75Ω unbalanced	
	OUTPUT: EURO AV (AV1, AV2) Connectors (21 pin) 1.0Vp-p, 75Ω unbalanced S-VIDEO OUT Connector Y: 1.0Vp-p, 75Ω unbalanced C: 0.3Vp-p, 75Ω unbalanced VIDEO OUT Connector (Phono type) 1.0Vp-p, 75Ω unbalanced	

ITEM	SPECIFICATION
AUDIO	HEAD: 1 stationary head (Normal Audio) 2 rotary heads (Hi-Fi 2CH)
	INPUT: EURO AV (AV1, AV2) Connectors (21 pin) More than −6dBV (500mV), More than 10kΩ AUDIO IN (AV3) Connector (Phono type) More than −10dBV (316mV), More than 47kΩ MICROPHONE JACK −70dBV
	OUTPUT: EURO AV (AV1, AV2) Connectors (21 pin) −6dBV (500mV), Less than 1kΩ AUDIO OUT Connector (Phono type) −8dBV (400mV), Less than 1kΩ HEADPHONE JACK −30dBV, 8Ω
	TRACK: 1 track (Normal-mono only) 2 channels (Hi-Fi Sound-Stereo)
TAPE FORMAT	S-VHS, VHS Cassette tape (Tape width 12.7mm)
TAPE SPEED	SP: 23.39mm/s (PAL), 33.35mm/s (NTSC) LP: 11.695mm/s (PAL), 11.12mm/s (NTSC) Record/Playback Time: SP: 4 hours with 240min. type tape LP: 8 hours with 240min. type tape FF/REW Time: 2.5min. with 180min. type tape
DIMENSIONS	430(W)×118(H)×395(D) mm
OPERATING TEMPERATURE	5°C~40°C
OPERATING HUMIDITY	35%~80%
WEIGHT	7.2kg
STANDARD ACCESSORIES	1 pc. DIN-RF Cable 1 pc. Infra-red Remote Controller 1 pc. Audio Cables 1 pc. AC Mains Lead 1 pc. S-VIDEO 4P Cable

Weight and dimensions shown are approximate.
Specifications are subject to change without notice.

⚠ **WARNING**

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

INTRODUCTION

This service manual contains technical informations which will help service personnel to understand and service the S-VHS Video Cassette Recorder NV-HS1000EGC/BYP/ECP, NV-HS800BY/ECC. Since this model has been developed from NV-HS1000EG/B/EC, NV-HS800B/EC, this manual does not cover the same part which is already described in the service manual for NV-HS1000EG/B/EC, NV-HS800B/EC. Therefore, when servicing, refer to the descriptions in the one for NV-HS1000EG/B/EC, NV-HS800B/EC Order No. VRD9406M119 (HS1000EG), VRD9408M134 (HS1000B/EC), VRD9501M104 (HS800B/EC).

CONTENTS

1. COMPARISON CHART 1
2. ELECTRICAL ADJUSTMENT PROCEDURES 6
3. SERVICE INFORMATION 6
4. SYSTEM CONTROL & SERVO SECTION IN MAIN & CYLINDER DRIVE SCHEMATIC DIAGRAM 8
5. AUDIO SECTION IN MAIN & SUB AUDIO PACK SCHEMATIC DIAGRAM 16
6. LUMINANCE & CHROMINANCE SECTION IN MAIN SCHEMATIC DIAGRAM 19
7. MAIN C.B.A. & SUB AUDIO PACK C.B.A. and CYLINDER DRIVE C.B.A. 23
8. TV DEMODULATOR SCHEMATIC DIAGRAM 27
9. TV DEMODULATOR C.B.A. 29
10. LUMINANCE & CHROMINANCE PACK C.B.A. 30
11. LUMINANCE & CHROMINANCE PACK SCHEMATIC DIAGRAM 33
12. SUB LUMINANCE & CHROMINANCE PACK & REC/RF AMP PACK SCHEMATIC DIAGRAM 38
13. SUB LUMINANCE & CHROMINANCE PACK C.B.A. & REC/RF AMP PACK C.B.A. 43
14. INPUT/OUTPUT PACK SCHEMATIC DIAGRAM 46
15. INPUT/OUTPUT PACK C.B.A. 49
16. HEAD AMP C.B.A. 51
17. HEAD AMP SCHEMATIC DIAGRAM 53
18. Hi-Fi AUDIO PACK SCHEMATIC DIAGRAM 56
19. Hi-Fi AUDIO PACK C.B.A. 59
20. NICAM DECODER PACK SCHEMATIC DIAGRAM (NV-HS1000BYP, 800BY ONLY) 62
21. NICAM DECODER PACK C.B.A. (NV-HS1000BYP, 800BY ONLY) 65
22. TIMER C.B.A. & VR C.B.A. 69
23. TIMER & VR SCHEMATIC DIAGRAM 73
24. PDC PACK SCHEMATIC DIAGRAM (NV-HS1000BYP/ECP ONLY) 78
25. PDC PACK C.B.A. (NV-HS1000BYP/ECP ONLY) 80
26. EXPLODED VIEW 82
27. ELECTRICAL REPLACEMENT PARTS LIST 83
    27-1. ELECTRICAL REPLACEMENT PARTS FOR NV-HS1000EGC 83
    27-2. ELECTRICAL REPLACEMENT PARTS FOR NV-HS1000BYP 100
    27-3. ELECTRICAL REPLACEMENT PARTS FOR NV-HS1000ECP 117
    27-4. ELECTRICAL REPLACEMENT PARTS FOR NV-HS800BY 135
    27-5. ELECTRICAL REPLACEMENT PARTS FOR NV-HS800ECC 150

1. COMPARISON CHART

1-1. COMPARISON CHART for NV-HS1000EGC

The following charts show the difference between the basic model NV-HS1000EG and the new model NV-HS1000EGC.

Note: IMPORTANT SAFETY NOTICE
Components identified with the mark ⟨!⟩ have the special characteristics for safety. When replacing any of these components, use only the same type.

MECHANICAL REPLACEMENT PARTS FOR NV-HS1000EGC (A)=ADDED, (C)=CHANGED, (D)=DELETED

REF NO.	NV-HS1000EG	NV-HS1000EGC	PCS	PARTS NAME & DESCRIPTIONS	REMARKS
5(1)	VXL2250	VML2902	1	OPENER LEVER UNIT	(C)
9(1)	VXL2380	VXL2440	1	CLEANER ARM UNIT	(C)
12(1)	VBS0050	VBS0052	1	FE HEAD	(C)
20(1)	VED0205	VED0217	1	A/C HEAD (1) UNIT	(C)
26(1)	VMA8763	VMA9158	1	HEAD AMP MOUNT ANGLE (L)	(C)
48(1)	VXL2243	VXL2394	1	TAKE-UP TENSION REGULATOR ARM UNIT	(C)
60(1)	VXR0221	VXR0236	1	SUPPLY REEL TABLE UNIT	(C)
61(1)	VXR0222	VXR0237	1	TAKE-UP REEL TABLE UNIT	(C)
62(1)	VXS0113	VXS0241	1	EARTH PLATE	(C)
65(1)	2SB941PSW	2SB1370YD01E	1	POWER TRANSISTOR	(C)
70(1)	VEG1133	VEG1355	1	CYLINDER UNIT	(C)
71(1)	VEH0651	VXP1561	1	UPPER CYLINDER UNIT	(C)
72(1)	VSC3940	VSC4137	1	CYLINDER SHIELD PLATE	(C)
80(1)	-------	VML2680	0 → 1	RELEASE LEVER	(A)
81(1)	-------	VMB2013	0 → 1	RELEASE SPRING	(A)
B5(1)	VHD0553	-------	2 → 0	SCREW	(D)
B8(1)	XTV26+8F	XTV26+8F	2 → 1	SCREW	(C)
B12(1)	-------	XTV26+10F	0 → 1	SCREW	(A)
106(2)	VXP1350	VXP1519	1	ROTOR UNIT	(C)
237(3)	VJH0683	VJH0827	1	RF ANT TERMINAL PLATE	(C)
300(4)	VQT5458	VQT6292	1	OPERATING INSTRUCTIONS (ENGLISH/GERMAN)	(C)
300(4)	VQT5459	VQT6293	1	OPERATING INSTRUCTIONS (ITALIAN)	(C)
300(4)	VQT5460	VQT6294	1	OPERATING INSTRUCTIONS (FRENCH/DUTCH)	(C)
302(4)	VJA0710	VJA0728	1	DIN RF CABLE	(C)

ELECTRICAL REPLACEMENT PARTS FOR NV-HS1000EGC (A)=ADDED, (C)=CHANGED, (D)=DELETED

REF NO.	NV-HS1000EG	NV-HS1000EGC	PCS	PARTS NAME & DESCRIPTIONS	REMARKS
	VEP03A37E	VEP03C01L	1	MAIN C. B. A.	(C)
	VEP07749A	VEP07801B	1	TV DEMODULATOR C. B. A.	(C)
	VEP03A72A	VEP03A72E	1	INPUT/OUTPUT PACK C. B. A.	(C)
	VEP04410E	VEP04447PS	1	HIFI AUDIO PACK C. B. A.	(C)
	VEP05176G	VEP05176L	1	HEAD AMP C. B. A.	(C)
	VEP06926C	VEP06B45A	1	VR C. B. A.	(C)
	VEP07739G	VEP07739X	1	TIMER C. B. A.	(C)
	VEX0126	VEX0235	1	CYLINDER DRIVE C. B. A.	(C)
	ENC17984	---------	1 → 0	RF CONVERTER	(D)
	ENV578D7H6	ENG47210G	1	TUNER	(C)

1-2. COMPARISON CHART for NV-HS1000BYP

The following charts show the difference between the basic model NV-HS1000B and the new model NV-HS1000BYP.

Note: IMPORTANT SAFETY NOTICE
Components identified with the mark ⟨!⟩ have the special characteristics for safety. When replacing any of these components, use only the same type.

MECHANICAL REPLACEMENT PARTS FOR NV-HS1000BYP (A)=ADDED, (C)=CHANGED, (D)=DELETED

REF NO.	NV-HS1000B	NV-HS1000BYP	PCS	PARTS NAME & DESCRIPTIONS	REMARKS
5(1)	VXL2250	VML2902	1	OPENER LEVER UNIT	(C)
9(1)	VXL2380	VXL2440	1	CLEANER ARM UNIT	(C)
12(1)	VBS0050	VBS0052	1	FE HEAD	(C)
20(1)	VED0205	VED0217	1	A/C HEAD (1) UNIT	(C)
26(1)	VMA8763	VMA9158	1	HEAD AMP MOUNT ANGLE (L)	(C)
48(1)	VXL2243	VXL2394	1	TAKE-UP TENSION REGULATOR ARM UNIT	(C)
60(1)	VXR0221	VXR0236	1	SUPPLY REEL TABLE UNIT	(C)
61(1)	VXR0222	VXR0237	1	TAKE-UP REEL TABLE UNIT	(C)
62(1)	VXS0113	VXS0241	1	EARTH PLATE	(C)
65(1)	2SB941PSW	2SB1370YD01E	1	POWER TRANSISTOR	(C)
70(1)	VEG1133	VEG1355	1	CYLINDER UNIT	(C)
71(1)	VEH0651	VXP1561	1	UPPER CYLINDER UNIT	(C)
72(1)	VSC3940	VSC4137	1	CYLINDER SHIELD PLATE	(C)
80(1)	-------	VML2680	0 → 1	RELEASE LEVER	(A)
81(1)	-------	VMB2013	0 → 1	RELEASE SPRING	(A)
B5(1)	VHD0553	-------	2 → 0	SCREW	(D)
B8(1)	XTV26+8F	XTV26+8F	2 → 1	SCREW	(C)
B12(1)	-------	XTV26+10F	0 → 1	SCREW	(A)
106(2)	VXP1350	VXP1519	1	ROTOR UNIT	(C)
237(3)	VJH0684	VJH0827	1	RF ANT TERMINAL PLATE	(C)
239(3)	VMP4178	VMP4448		SIDE ANGLE (R)	(C)
240(3)	VMP4179	VMP4449		SIDE ANGLE (L)	(C)
300(4)	VQT5798	VQT6290	1	OPERATING INSTRUCTIONS (ENGLISH)	(C)
302(4)	VJA0376	VJA0710	1	DIN RF CABLE	(C)
317(4)	VPG7582	VPG8200	1	PACKING	(C)

ELECTRICAL REPLACEMENT PARTS FOR NV-HS1000BYP (A)=ADDED, (C)=CHANGED, (D)=DELETED

REF NO.	NV-HS1000B	NV-HS1000BYP	PCS	PARTS NAME & DESCRIPTIONS	REMARKS
	VEP03A37K	VEP03C01P	1	MAIN C. B. A.	(C)
	VEP07680K	VEP07801R	1	TV DEMODULATOR C. B. A.	(C)
	VEP07786A	----------	1 → 0	AFC DEF C. B. A.	(D)
	VEP03A72D	VEP03A72G	1	INPUT/OUTPUT PACK C. B. A.	(C)
	VEP04447E	VEP04447PS	1	HIFI AUDIO PACK C. B. A.	(C)
	VEP07675A	VEP07675G	1	NICAM DECODER PACK C. B. A.	(C)
	----------	VEP07709A	0 → 1	PDC PACK C. B. A.	(A)
	VEP05176G	VEP05176L	1	HEAD AMP C. B. A.	(C)
	VEP06926C	VEP06B45A	1	VR C. B. A.	(C)
	VEP07739Q	VEP07739AC	1	TIMER C. B. A.	(C)
	VEX0126	VEX0235	1	CYLINDER DRIVE C. B. A.	(C)
	ENC17990	----------	1 → 0	RF CONVERTER	(D)
	ENV87837H3Y	ENG47211G	1	TUNER	(C)

1-3. COMPARISON CHART for NV-HS1000ECP

The following charts show the difference between the basic model NV-HS1000EC and the new model NV-HS1000ECP

> **Note: IMPORTANT SAFETY NOTICE**
> Components identified with the mark ⟨!⟩ have the special characteristics for safety. When replacing any of these components, use only the same type.

MECHANICAL REPLACEMENT PARTS FOR NV-HS1000ECP (A)=ADDED, (C)=CHANGED, (D)=DELETED

REF NO.	NV-HS1000EC	NV-HS1000ECP	PCS	PARTS NAME & DESCRIPTIONS	REMARKS
5(1)	VXL2250	VML2902	1	OPENER LEVER UNIT	(C)
9(1)	VXL2380	VXL2440	1	CLEANER ARM UNIT	(C)
12(1)	VBS0050	VBS0052	1	FE HEAD	(C)
20(1)	VED0205	VED0217	1	A/C HEAD (1) UNIT	(C)
26(1)	VMA8763	VMA9158	1	HEAD AMP MOUNT ANGLE (L)	(C)
48(1)	VXL2243	VXL2394	1	TAKE-UP TENSION REGULATOR ARM UNIT	(C)
60(1)	VXR0221	VXR0236	1	SUPPLY REEL TABLE UNIT	(C)
61(1)	VXR0222	VXR0237	1	TAKE-UP REEL TABLE UNIT	(C)
62(1)	VXS0113	VXS0241	1	EARTH PLATE	(C)
65(1)	2SB941PSW	2SB1370YD01E	1	POWER TRANSISTOR	(C)
70(1)	VEG1133	VEG1355	1	CYLINDER UNIT	(C)
71(1)	VEH0651	VXP1561	1	UPPER CYLINDER UNIT	(C)
72(1)	VSC3940	VSC4137	1	CYLINDER SHIELD PLATE	(C)
80(1)	-------	VML2680	0 → 1	RELEASE LEVER	(A)
81(1)	-------	VMB2013	0 → 1	RELEASE SPRING	(A)
B5(1)	VHD0553	-------	2 → 0	SCREW	(D)
B8(1)	XTV26+8F	XTV26+8F	2 → 1	SCREW	(C)
B12(1)	-------	XTV26+10F	0 → 1	SCREW	(A)
106(2)	VXP1350	VXP1519	1	ROTOR UNIT	(C)
237(3)	VJH0683	VJH0827	1	RF ANT TERMINAL PLATE	(C)
239(3)	VMP4178	VMP4448		SIDE ANGLE (R)	(C)
240(3)	VMP4179	VMP4449		SIDE ANGLE (L)	(C)
300(4)	VQT5799	VQT6300	1	OPERATING INSTRUCTIONS (ENGLISH/SPANISH)	(C)
300(4)	VQT5800	VQT6301	1	OPERATING INSTRUCTIONS (FRENCH/DUTCH)	(C)
300(4)	VQT5801	VQT6302	1	OPERATING INSTRUCTIONS (SWEDISH/DANISH)	(C)
300(4)	VQT5802	VQT6303	1	OPERATING INSTRUCTIONS (FINNISH)	(C)
302(4)	VJA0376	VJA0710	1	DIN RF CABLE	(C)
317(4)	VPG7583	VPG8201	1	PACKING	(C)

ELECTRICAL REPLACEMENT PARTS FOR NV-HS1000ECP (A)=ADDED, (C)=CHANGED, (D)=DELETED

REF NO.	NV-HS1000EC	NV-HS1000ECP	PCS	PARTS NAME & DESCRIPTIONS	REMARKS
	VEP03A37L	VEP03C01R	1	MAIN C. B. A.	(C)
	VEP07757C	VEP07801B	1	TV DEMODULATOR C. B. A.	(C)
	VEP03A72B	VEP03A72E	1	INPUT/OUTPUT PACK C. B. A.	(C)
	VEP04447E	VEP04447PS	1	HIFI AUDIO PACK C. B. A.	(C)
	---------	VEP07709A	0 → 1	PDC PACK C. B. A.	(A)
	VEP05176G	VEP05176L	1	HEAD AMP C. B. A.	(C)
	VEP06926C	VEP06B45A	1	VR C. B. A.	(C)
	VEP07739R	VEP07739AD	1	TIMER C. B. A.	(C)
	VEX0126	VEX0235	1	CYLINDER DRIVE C. B. A.	(C)
	ENC17984	---------	1 → 0	RF CONVERTER	(D)
	ENV578D7H6	ENG47210G	1	TUNER	(C)

1-4. COMPARISON CHART for NV-HS800BY

The following charts show the difference between the basic model NV-HS800B and the new model NV-HS800BY.

> **Note: IMPORTANT SAFETY NOTICE**
> Components identified with the mark ⟨!⟩ have the special characteristics for safety. When replacing any of these components, use only the same type.

MECHANICAL REPLACEMENT PARTS FOR NV-HS800BY (A)=ADDED, (C)=CHANGED, (D)=DELETED

REF NO.	NV-HS800B	NV-HS800BY	PCS	PARTS NAME & DESCRIPTIONS	REMARKS
12(1)	VBS0050	VBS0052	1	FE HEAD	(C)
20(1)	VED0205	VED0217	1	A/C HEAD (1) UNIT	(C)
60(1)	VXR0221	VXR0236	1	SUPPLY REEL TABLE UNIT	(C)
61(1)	VXR0222	VXR0237	1	TAKE-UP REEL TABLE UNIT	(C)
62(1)	VXS0113	VXS0241	1	EARTH PLATE	(C)
65(1)	2SB941PSW	2SB1370YD01E	1	POWER TRNSISTOR	(C)
70(1)	VEG1133	VEG1355	1	CYLINDER UNIT	(C)
71(1)	VEH0651	VXP1561	1	UPPER CYLINDER UNIT	(C)
72(1)	VSC3940	VSC4137	1	CYLINDER SHIELD PLATE	(C)
80(1)	-------	VML2680	0 → 1	RELEASE LEVER	(A)
81(1)	-------	VMB2013	0 → 1	RELEASE SPRING	(A)
B5(1)	VHD0553	-------	2 → 0	SCREW	(D)
B8(1)	XTV26+8F	XTV26+8F	2 → 1	SCREW	(C)
B12(1)	-------	XTV26+10F	0 → 1	SCREW	(A)
237(3)	VJH0684	VJH0827	1	RF ANT TERMINAL PLATE	(C)
239(3)	VMP4178	VMP4448		SIDE ANGLE (R)	(C)
240(3)	VMP4179	VMP4449		SIDE ANGLE (L)	(C)
300(4)	VQT5464	VQT6313	1	OPERATING INSTRUCTIONS (ENGLISH)	(C)
302(4)	VJA0376	VJA0710	1	DIN RF CABLE	(C)
317(4)	VPG7195	VPG8208	1	PACKING	(C)

ELECTRICAL REPLACEMENT PARTS FOR NV-HS800BY (A)=ADDED, (C)=CHANGED, (D)=DELETED

REF NO.	NV-HS800B	NV-HS800BY	PCS	PARTS NAME & DESCRIPTIONS	REMARKS
	VEP03A37F	VEP03C01T	1	MAIN C. B. A.	(C)
	VEP07680K	VEP07801R	1	TV DEMODULATOR C. B. A.	(C)
	VEP07786A	---------	1 → 0	AFC DEF C. B. A.	(D)
	VEP03A72D	VEP03A72G	1	INPUT/OUTPUT PACK C. B. A.	(C)
	VEP04447E	VEP04447PS	1	HIFI AUDIO PACK C. B. A.	(C)
	VEP07675A	VEP07675G	1	NICAM DECODER PACK C. B. A.	(C)
	VEP05176G	VEP05176L	1	HEAD AMP C. B. A.	(C)
	VEP06926C	VEP06B45A	1	VR C. B. A.	(C)
	VEP07739J	VEP07739Z	1	TIMER C. B. A.	(C)
	VEX0126	VEX0235	1	CYLINDER DRIVE C. B. A.	(C)
	ENC17990	---------	1 → 0	RF CONVERTER	(D)
	ENV87837H3Y	ENG47211G	1	TUNER	(C)

1-5. COMPARISON CHART for NV-HS800ECC

The following charts show the difference between the basic model NV-HS800EC and the new model NV-HS800ECC.

> **Note: IMPORTANT SAFETY NOTICE**
> Components identified with the mark ⟨!⟩ have the special characteristics for safety. When replacing any of these components, use only the same type.

MECHANICAL REPLACEMENT PARTS FOR NV-HS800ECC (A)=ADDED, (C)=CHANGED, (D)=DELETED

REF NO.	NV-HS800EC	NV-HS800ECC	PCS	PARTS NAME & DESCRIPTIONS	REMARKS
12(1)	VBS0050	VBS0052	1	FE HEAD	(C)
20(1)	VED0205	VED0217	1	A/C HEAD (1) UNIT	(C)
60(1)	VXR0221	VXR0236	1	SUPPLY REEL TABLE UNIT	(C)
61(1)	VXR0222	VXR0237	1	TAKE-UP REEL TABLE UNIT	(C)
62(1)	VXS0113	VXS0241	1	EARTH PLATE	(C)
65(1)	2SB941PSW	2SB1370YD01E	1	POWER TRANSISTOR	(C)
70(1)	VEG1133	VEG1355	1	CYLINDER UNIT	(C)
71(1)	VEH0651	VXP1561	1	UPPER CYLINDER UNIT	(C)
72(1)	VSC3940	VSC4137	1	CYLINDER SHIELD PLATE	(C)
80(1)	-------	VML2680	0 → 1	RELEASE LEVER	(A)
81(1)	-------	VMB2013	0 → 1	RELEASE SPRING	(A)
B5(1)	VHD0553	-------	2 → 0	SCREW	(D)
B8(1)	XTV26+8F	XTV26+8F	2 → 1	SCREW	(C)
B12(1)	-------	XTV26+10F	0 → 1	SCREW	(A)
237(3)	VJH0683	VJH0827	1	RF ANT TERMINAL PLATE	(C)
239(3)	VMP4178	VMP4448		SIDE ANGLE (R)	(C)
240(3)	VMP4179	VMP4449		SIDE ANGLE (L)	(C)
300(4)	VQT5465	VQT6309	1	OPERATING INSTRUCTIONS (ENGLISH/SPANISH)	(C)
300(4)	VQT5466	VQT6310	1	OPERATING INSTRUCTIONS (FRENCH/DUTCH)	(C)
300(4)	VQT5467	VQT6311	1	OPERATING INSTRUCTIONS (SWEDISH/DANISH)	(C)
300(4)	VQT5468	VQT6312	1	OPERATING INSTRUCTIONS (FINNISH)	(C)
302(4)	VJA0376	VJA0710	1	DIN RF CABLE	(C)

ELECTRICAL REPLACEMENT PARTS FOR NV-HS800ECC (A)=ADDED, (C)=CHANGED, (D)=DELETED

REF NO.	NV-HS800EC	NV-HS800ECC	PCS	PARTS NAME & DESCRIPTIONS	REMARKS
	VEP03A37G	VEP03C01U	1	MAIN C. B. A.	(C)
	VEP07757C	VEP07801B	1	TV DEMODULATOR C. B. A.	(C)
	VEP03A72B	VEP03A72E	1	INPUT/OUTPUT PACK C. B. A.	(C)
	VEP04447E	VEP04447PS	1	HIFI AUDIO PACK C. B. A.	(C)
	VEP05176G	VEP05176L	1	HEAD AMP C. B. A.	(C)
	VEP06926C	VEP06B45A	1	VR C. B. A.	(C)
	VEP07739K	VEP07739AA	1	TIMER C. B. A.	(C)
	VEX0126	VEX0235	1	CYLINDER DRIVE C. B. A.	(C)
	ENC17984	---------	1 → 0	RF CONVERTER	(D)
	ENV578D7H6	ENG47210G	1	TUNER	(C)

2 ELECTRICAL ADJUSTMENT PROCEDURES

The specification of REC CURRENT ADJUSTMENT has been changed.

2-5-9. RECORDING CURRENT ADJUSTMENT

TP	ADJ.	MODE	INPUT
TP507 (HOT) TP508 (GND)	VR3001 (VHS Y) VR3002 (S-VHS Y) VR3003 (C)	SP RECORDING	PAL COLOUR BAR
TAPE	**M. EQ.**	**SPEC.**	
S-VHS BLANK TAPE	OSCILLO-SCOPE	VHS Y : 140+−5 (mVp-p) S-VHS Y: 140+−5 (mVp-p) C : 32+−2 (mVp-p)	

3. SERVICE INFORMATION

3-1. UPPER CYLINDER REPLACEMENT

A. UPPER CYLINDER DISASSEMBLY

1) Remove the Top Panel.
2) Remove the Screw (A) and Earth Plate.
3) Lift up the Upper Cylinder.

Note: Do not remove 3 Screws on the Upper Cylinder.



Fig. S1

Do not remove the Rotor Magnet which fixed by 3 screws on the Upper Cylinder.

If it is removed, refer to following method.

1) Install the Rotor Magnet so that the hole (C) on the Rotor Magnet fits to the small projection (D) on bottom of the Upper Cylinder.
2) Tighten 3 screws on top of the Upper Cylinder.

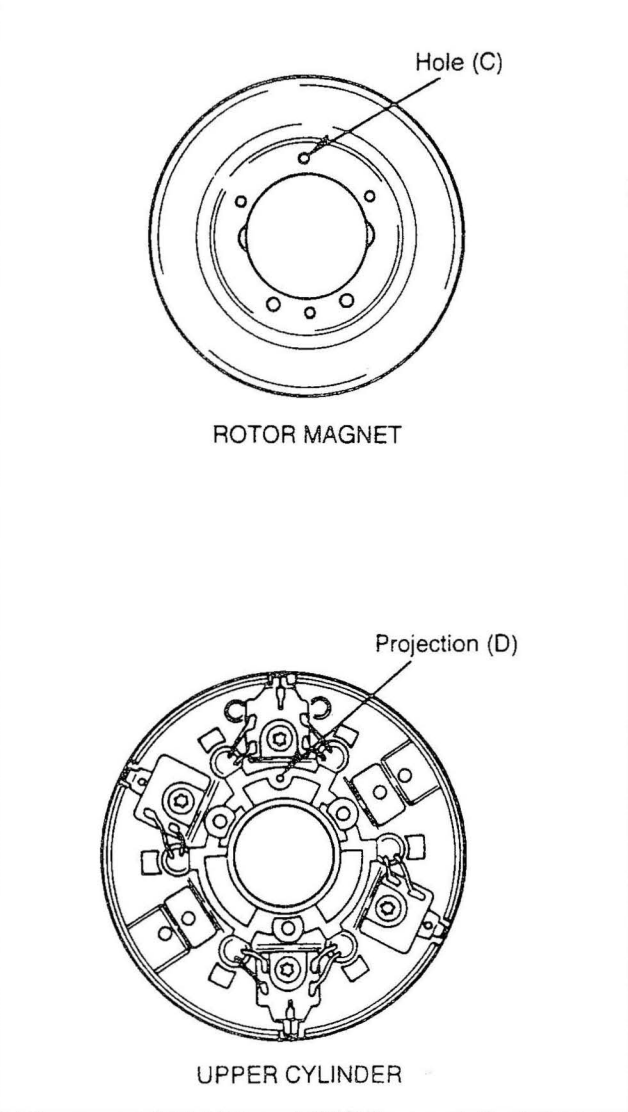

Fig. S2

B. UPPER CYLINDER ASSEMBLY

When reassembling, perform the steps in the reverse order of the DISASSEMBLY METHOD.

3-2 PARTS CHANGE NOTICE

[Model No.]:NV-HS1000EGC/BYP/ECP, NV-HS800BY/ECC
[Effective from]:Running Change
[Subject]:Change of MAIN C. B. A.
[Parts List]

INTERCHANGEABLITY CODE See the I/C column on the following Part Number list

	Parts	Prdctn		Parts	Prdctn		Parts	Prdctn		Parts	Prdctn		
A	Orgnl	Early	B	Orgnl	Early	C	Orgnl	Early	D	Orgnl	Early	E	Addition
	New	Late		New	Late		New	Late		New	Late	F	Deletion
												G	Other

Parts Number List

Ref. No.	Orgnl Part No.	New Part No.	Part Name & Description	I/C	Remarks
	VEP03C01L	VEP03C01A	MAIN C. B. A.	A	NV-HS1000EGC
	VEP03A61A	VEP03A61G	LUMINANCE & CHROMINANCE C. B. A.	D	NV-HS1000EGC
IC301	VEFH20B	VCR0390	IC	D	
L312	ELESE121JA	VLQE0407101K	COIL 100UH	D	
	VEP03A62A	VEP03A62D	SUB LUMINANCE & CHROMINANCE C. B. A.	D	NV-HS1000EGC
	VEP03A90A	VEP03A90B	REC/RF AMP C. B. A.	D	
C3612	---------	ECUM1H100DCN	C. CAPACITOR CH 50V 10P	E	
R3615	---------	ERJ6GMYG681	C. RESISTOR CH 1/10W 680	E	
	VEP03C01P	VEP03C01D	MAIN C. B. A.	A	NV-HS1000BYP
	VEP03A61E	VEP03A61J	LUMINANCE & CHROMINANCE C. B. A.	D	NV-HS1000BYP
IC301	VEFH20B	VCR0390	IC	D	
L312	ELESE121JA	VLQE0407101K	COIL 100UH	D	
	VEP03A62C	VEP03A62F	SUB LUMINANCE & CHROMINANCE C. B. A.	D	NV-HS1000BYP
	VEP03A90A	VEP03A90B	REC/RF AMP C. B. A.	D	
C3612	---------	ECUM1H100DCN	C. CAPACITOR CH 50V 10P	E	
R3615	---------	ERJ6GMYG681	C. RESISTOR CH 1/10W 680	E	
	VEP03C01R	VEP03C01F	MAIN C. B. A.	A	NV-HS1000ECP
	VEP03A61B	VEP03A61H	LUMINANCE & CHROMINANCE C. B. A.	D	NV-HS1000ECP
IC301	VEFH20B	VCR0390	IC	D	
L312	ELESE121JA	VLQE0407101K	COIL 100UH	D	
	VEP03A62B	VEP03A62E	SUB LUMINANCE & CHROMINANCE C. B. A.	D	NV-HS1000ECP
	VEP03A90A	VEP03A90B	REC/RF AMP C. B. A.	D	
C3612	---------	ECUM1H100DCN	C. CAPACITOR CH 50V 10P	E	
R3615	---------	ERJ6GMYG681	C. RESISTOR CH 1/10W 680	E	
	VEP03C01T	VEP03C01J	MAIN C. B. A.	A	NV-HS800BY
	VEP03A61F	VEP03A61L	LUMINANCE & CHROMINANCE C. B. A.	D	NV-HS800BY
IC301	VEFH20B	VCR0390	IC	D	
L312	ELESE121JA	VLQE0407101K	COIL 100UH	D	
	VEP03A62C	VEP03A62F	SUB LUMINANCE & CHROMINANCE C. B. A.	D	NV-HS800BY
	VEP03A90A	VEP03A90B	REC/RF AMP C. B. A.	D	
C3612	---------	ECUM1H100DCN	C. CAPACITOR CH 50V 10P	E	
R3615	---------	ERJ6GMYG681	C. RESISTOR CH 1/10W 680	E	
	VEP03C01U	VEP03C01K	MAIN C. B. A.	A	NV-HS800ECC
	VEP03A61D	VEP03A61K	LUMINANCE & CHROMINANCE C. B. A.	D	NV-HS800ECC
IC301	VEFH20B	VCR0390	IC	D	
L312	ELESE121JA	VLQE0407101K	COIL 100UH	D	
	VEP03A62B	VEP03A62E	SUB LUMINANCE & CHROMINANCE C. B. A.	D	NV-HS800ECC
	VEP03A90A	VEP03A90B	REC/RF AMP C. B. A.	D	
C3612	---------	ECUM1H100DCN	C. CAPACITOR CH 50V 10P	E	
R3615	---------	ERJ6GMYG681	C. RESISTOR CH 1/10W 680	E	

Note: Refer to page 30 to 45.

4. SYSTEM CONTROL & SERVO SECTION IN MAIN & CYLINDER DRIVE SCHEMATIC DIAGRAM

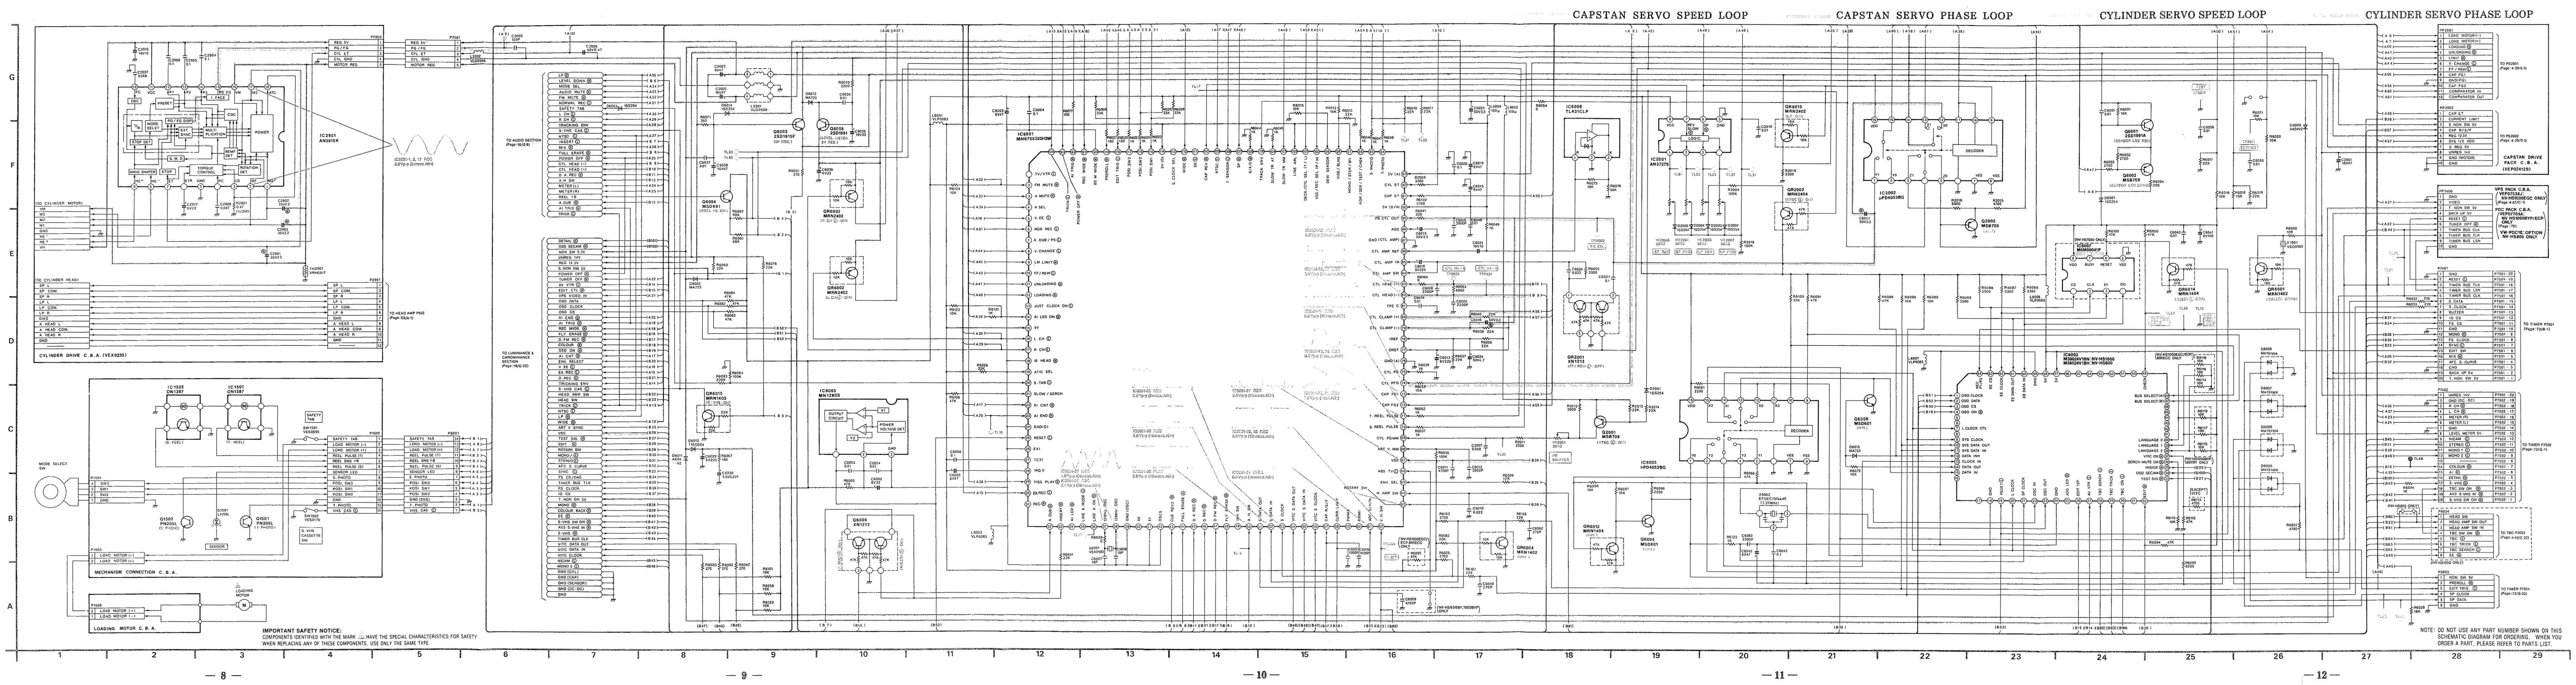
CAPSTAN SERVO SPEED LOOP
CAPSTAN SERVO PHASE LOOP
CYLINDER SERVO SPEED LOOP
CYLINDER SERVO PHASE LOOP
IC2501 AN3815K
CYLINDER DRIVE C.B.A. (VEX0235)
MECHANISM CONNECTION C.B.A.
LOADING MOTOR C.B.A.
IC6001 MN1531XHSM
IC6005 MN1280S
IC6003 TL431CLP
IC2001 AN3750
IC2002 µPD4053BG
IC6005 µPD4053BG
CAPSTAN DRIVE PACK C.B.A. (VEP20H29)
TO AUDIO SECTION
TO LUMINANCE & CHROMINANCE SECTION
TO HEAD AMP P500
TO TIMER P7501
TO TIMER P7502
TO TIMER P7504
G
F
E
D
C
B
A
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29

IMPORTANT SAFETY NOTICE:
COMPONENTS IDENTIFIED WITH THE MARK ⚠ HAVE THE SPECIAL CHARACTERISTICS FOR SAFETY WHEN REPLACING ANY OF THESE COMPONENTS, USE ONLY THE SAME TYPE.

NOTE: DO NOT USE ANY PART NUMBER SHOWN ON THIS SCHEMATIC DIAGRAM FOR ORDERING. WHEN YOU ORDER A PART, PLEASE REFER TO PARTS LIST.

SYSTEM CONTROL & SERVO ICs DC VOLTAGE CHART (SP MODE)

REF. NO.	IC2001							
MODE	1	2	3	4	5	6	7	8
STOP	0	5.0	0	0	0	5.0	0	5.0
PLAY	0	5.0	0	0	0	5.0	0	5.0
REC	0	4.9	0	0	0	5.0	0	5.0
F.F	0	5.0	0	0	0	5.0	0	5.0
REW	5.0	0	0	0	0	5.0	5.0	5.0

REF. NO.	IC2002															
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
STOP	2.5	2.3	1.4	1.4	1.0	0	0	0	5.0	0	0	2.6	0	2.6	2.3	5.2
PLAY	2.6	2.3	2.6	2.6	2.0	0	0	0	5.0	0	0	2.5	0	2.5	2.3	5.2
REC	2.5	2.3	1.1	1.1	0.6	0	0	0	5.0	0	0	2.6	0	2.6	2.3	5.2
F.F	2.5	2.3	1.6	1.6	1.0	0	0	0	5.0	0	0	2.6	0	2.6	2.3	5.2
REW	2.5	2.3	1.2	1.2	0.6	0	0	0	5.0	0	0	2.6	0	2.6	2.3	5.2

REF. NO.	IC2901																	
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
STOP	14.8	14.6	0.1	1.2	0.1	2.6	2.5	2.6	2.5	2.7	5.2	3.8	3.9	3.8	1.2	14.4	14.6	0.1
PLAY	14.5	13.9	0.1	1.1	0.1	2.6	2.5	2.6	2.5	2.8	5.2	3.9	3.9	3.8	1.5	14.3	14.4	0.1
REC	14.8	14.7	0.1	1.2	0.1	2.6	2.5	2.6	2.5	2.8	5.2	3.9	3.9	3.9	1.4	14.3	14.4	0.1
F.F	14.1	13.8	0.1	1.1	0.1	2.6	2.5	2.6	2.5	2.8	5.2	3.9	3.8	3.8	1.5	14.3	13.7	0.1
REW	14.5	13.5	0.1	1.1	0.1	2.6	2.5	2.6	2.5	2.8	5.2	3.8	3.8	3.9	1.5	14.3	14.5	0.1

REF. NO.	IC6001																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
STOP	0	0.1	0	5.0	0.1	5.0	5.0	4.9	0.1	4.9	0	0	5.0	4.9	5.0	0	0	0	0	0
PLAY	0	0.1	0	5.0	5.0	5.0	5.0	4.9	0.1	4.9	0	0	5.0	4.9	5.0	0	0	0	0	0
REC	0	0.1	0	5.0	0.1	0	5.0	4.9	0.1	4.9	0	0	5.0	4.9	5.0	0	0	0	0	0
F.F	0	0.1	0	5.0	0.1	5.0	5.0	0	0.1	0	0	0	5.0	4.9	5.0	0	0	0	0	0
REW	0	0.1	0	5.0	0.1	5.0	5.0	0	0.1	0	0	0	5.0	4.9	5.0	0	0	0	0	0

REF. NO.	IC6001																			
MODE	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
STOP	5.0	0.1	5.0	0	5.0	0	0	0	0	0	0	0	0	5.0	5.0	0	2.7	2.7	0	5.0
PLAY	5.0	0.1	0.2	0	5.0	0	0	0	0	0	0	0	0	5.0	5.0	0	2.7	2.7	0	5.0
REC	5.0	0.1	5.0	0	5.0	0	0	0	0	4.9	5.0	0	0	5.0	5.0	0	2.7	2.7	0	5.0
F.F	5.0	0.1	5.0	0	5.0	0	0	0	0	0	0	0	0	5.0	5.0	0	2.7	2.7	0	5.0
REW	5.0	0.1	5.0	0	5.0	0	0	0	0	0	0	0	0	5.0	5.0	0	2.7	2.7	0	5.0

REF. NO.	IC6001																			
MODE	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
STOP	0	0	0	0	0	0.1	0	0	5.0	0	1.8	0.9	4.5	4.8	5.0	4.8	2.0	0	2.6	2.5
PLAY	0	0	0	0	0	0.1	0	0	5.0	3.7	1.7	0.9	4.5	4.8	5.0	4.8	0	5.0	2.7	2.5
REC	0	0	0	5.0	5.0	5.0	5.0	0	5.0	0	1.7	0.9	4.5	4.8	5.0	4.8	0	5.0	2.6	2.5
F.F	0	0	0	0	0	0.1	0	0	5.0	0	1.7	0.8	4.5	4.8	5.0	4.8	0	5.0	5.0	2.5
REW	0	0	0	0	0	0.1	0	0	5.0	0	1.7	0.9	4.5	4.8	5.0	4.8	5.0	5.0	5.0	2.5

REF. NO.	IC6001																			
MODE	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80
STOP	0	5.0	5.0	0	4.0	5.0	2.5	0.3	3.5	5.0	0	2.5	2.5	1.5	0	0	2.5	2.5	2.4	2.6
PLAY	0	3.7	5.0	0	4.0	5.0	2.5	0.3	3.7	5.0	5.0	2.5	2.5	1.5	0	0	2.5	2.5	3.0	2.5
REC	0	5.0	5.0	0	4.5	5.0	2.5	0.3	3.8	5.0	5.0	2.5	2.5	1.5	0	0	2.5	2.5	2.4	2.6
F.F	0	5.0	5.0	0	2.4	5.0	2.5	0.3	3.7	2.5	2.9	2.5	2.5	1.2	0	0	2.5	2.5	2.5	2.6
REW	0	4.0	3.6	0	2.5	5.0	2.5	0.3	3.7	2.7	2.5	2.5	2.5	1.3	0	0	2.5	2.5	2.5	2.6

REF. NO.	IC6001																			
MODE	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
STOP	4.9	0	0	0	2.5	2.5	0	2.7	2.5	5.0	1.4	2.5	5.0	3.5	5.0	5.0	5.0	3.5	0	3.5
PLAY	5.0	0	0	0	2.5	2.5	0	3.0	2.5	5.0	2.5	2.5	5.0	4.1	5.0	5.0	5.0	3.5	0	3.5
REC	4.9	3.7	3.9	0	2.5	2.5	0	2.7	2.5	5.0	2.7	2.5	5.0	4.1	4.8	5.0	5.0	3.5	0	3.5
F.F	5.0	0	0	0	2.5	2.5	0	3.1	2.5	5.0	2.3	2.5	5.0	4.4	4.9	5.0	5.0	3.5	0	3.5
REW	5.0	0	0	0	2.5	2.5	0	3.1	2.5	5.0	2.4	2.5	5.0	4.4	4.9	5.0	5.0	3.5	0	3.5

REF. NO.	IC6001																			
MODE	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120
STOP	3.5	5.0	2.3	0	1.6	0	5.0	5.0	5.0	0	5.0	0	4.5	5.0	0	0	5.0	5.0	0	0
PLAY	3.5	5.0	2.6	0	2.7	0	5.0	0.2	5.0	0	5.0	0	4.5	5.0	0	0	5.0	5.0	0	0
REC	3.5	5.0	2.6	0	1.2	0	5.0	0.2	5.0	0	5.0	0	4.5	5.0	0	0	5.0	5.0	0	0
F.F	3.5	5.0	2.6	0	1.2	0	5.0	0.2	5.0	0	5.0	0	4.5	5.0	0	5.0	5.0	5.0	0	0
REW	3.5	5.0	2.3	0	1.2	0	5.0	0.2	5.0	5.0	5.0	0	4.5	5.0	0	5.0	5.0	5.0	0	0

REF. NO.	IC6001			
MODE	121	122	123	124
STOP	0	0	0	5.0
PLAY	0	0	0	5.0
REC	0	0	0	5.0
F.F	0	0	0	5.0
REW	0	0	0	5.0

REF. NO.	IC6002																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
STOP	4.8	4.7	4.6	0	0	0	5.0	0	4.5	0.9	0.9	0	4.8	3.1	4.7	0	0	0	4.9	5.0
PLAY	4.8	4.7	4.6	0	0	0	5.0	0	4.5	1.0	1.0	0	4.8	3.1	4.7	0	0	0	4.9	5.0
REC	4.8	4.7	4.6	0	0	0	5.0	0	4.5	1.0	1.0	0	4.8	3.1	4.7	0	0	0	4.9	5.0
F.F	4.8	4.7	4.6	0	0	0	5.0	0	4.5	1.0	1.0	0	4.8	3.1	4.7	0	0	0	4.9	5.0
REW	4.8	4.7	4.6	0	0	0	5.0	0	4.5	1.0	1.0	0	4.8	3.1	4.7	0	0	0	4.9	5.0

REF. NO.	IC6002																			
MODE	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
STOP	5.0	2.2	2.4	0	0	0	5.0	5.0	5.0	5.0	0	0	0	0.2	0	0	4.5	0	0	0
PLAY	5.0	2.2	2.4	0	0	0	0	5.0	5.0	0	0	0	0	0.2	0	0	4.5	0	0	0
REC	5.0	2.2	2.4	0	0	0	0	5.0	5.0	5.0	0	0	0	0.2	0	0	4.5	0	0	0
F.F	5.0	2.2	2.4	0	0	0	0	5.0	5.0	5.0	0	0	0	0.2	0	0	4.5	0	0	0
REW	5.0	2.2	2.4	0	0	0	0	5.0	5.0	5.0	0	0	0	0.2	0	0	4.5	0	0	0

REF. NO.	IC6002																			
MODE	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
STOP	0	0	0	0	0	0	5.0	0	5.0	0	0	0	0	0	0	0	5.0	5.0	0	5.0
PLAY	0	0	0	0	0	0	5.0	0	5.0	0	0	0	0	0	0	0	5.0	5.0	0	5.0
REC	0	0	0	0	0	0	5.0	0	5.0	0	0	0	0	0	0	0	5.0	5.0	0	5.0
F.F	0	0	0	0	0	0	5.0	0	5.0	0	0	0	0	0	0	0	5.0	5.0	0	5.0
REW	0	0	0	0	0	0	5.0	0	5.0	0	0	0	0	0	0	0	5.0	5.0	0	5.0

REF. NO.	IC6002			
MODE	61	62	63	64
STOP	0.1	5.0	5.0	5.0
PLAY	0.1	5.0	5.0	5.0
REC	0.1	5.0	5.0	5.0
F.F	0.1	5.0	5.0	5.0
REW	0.1	5.0	5.0	5.0

REF. NO.	IC6003		
MODE	1	2	3
STOP	5.0	5.0	0
PLAY	5.0	5.0	0
REC	5.0	5.0	0
F.F	5.0	5.0	0
REW	5.0	5.0	0

REF. NO.	IC6005															
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
STOP	5.0	4.8	4.8	4.3	5.0	0	0	0	5.0	0	5.0	5.0	4.6	5.0	4.6	5.0
PLAY	5.0	4.8	4.8	4.3	5.0	0	0	0	5.0	0	5.0	5.0	4.7	5.0	4.6	5.0
REC	5.0	4.8	4.8	4.3	5.0	0	0	0	5.0	0	5.0	5.0	4.7	5.0	4.6	5.0
F.F	5.0	4.8	4.8	4.3	5.0	0	0	0	5.0	0	5.0	5.0	4.7	5.0	4.7	5.0
REW	5.0	4.8	4.8	4.3	5.0	0	0	0	5.0	0	5.0	5.0	4.7	5.0	4.7	5.0

REF. NO.	IC6007										IC6008		
MODE	1	2	3	4	5	6	7	8			1	2	3
STOP	5.0	5.0	0.1	5.0	0	0	5.0	5.0			2.3	0	2.9
PLAY	5.0	5.0	0.1	5.0	0	0	5.0	5.0			2.3	0	2.9
REC	5.0	5.0	0.1	5.0	0	0	5.0	5.0			2.3	0	2.9
F.F	5.0	5.0	0.1	5.0	0	0	5.0	5.0			2.3	0	2.9
REW	5.0	5.0	0.1	5.0	0	0	5.0	5.0			2.3	0	2.9

SYSTEM CONTROL & SERVO TRANSISTORs DC VOLTAGE CHART (SP MODE)

REF. NO.	Q2001			Q2002			Q6001			Q6002			Q6003			Q6004		
MODE	E	C	B	E	C	B	E	C	B	E	C	B	E	C	B	E	C	B
STOP	5.0	4.8	5.0	1.6	0	1.0	5.1	14.4	5.6	5.1	−0.2	5.0	5.2	5.4	5.9	5.0	5.0	5.7
PLAY	5.0	4.8	5.0	2.6	0	2.0	5.0	14.4	5.6	5.0	4.8	4.2	5.2	5.4	5.9	5.0	5.0	5.7
REC	5.0	4.8	4.9	1.1	0	0.5	4.9	14.3	5.6	4.9	4.8	4.2	5.2	5.4	5.9	5.0	5.0	5.5
F.F	5.0	4.8	5.0	1.1	0	1.1	5.0	14.3	5.6	5.0	4.9	4.2	5.2	5.4	5.9	5.0	5.0	5.7
REW	5.0	4.8	5.0	1.1	0	0.5	5.0	14.3	5.6	5.0	4.8	4.2	5.2	5.4	5.9	5.0	5.0	5.7

REF. NO.	Q6005			Q6006			Q6008		
MODE	E	C	B	E	C	B	E	C	B
STOP	0	4.9	0.1	0	4.7	0.1	5.0	5.1	5.8
PLAY	0	4.9	0.1	0	4.7	0.1	5.0	5.1	5.8
REC	0	4.9	0.1	0	4.7	0.1	5.0	5.1	5.8
F.F	0	4.8	0.1	0	4.7	0.1	5.0	5.1	5.8
REW	0	4.8	0.1	0	4.7	0.1	5.0	5.1	5.8

REF. NO.	QR2001						QR2002			QR6001			QR6002			QR6003		
MODE	1	2	3	4	5		E	C	B	E	C	B	E	C	B	E	C	B
STOP	0	0	4.9	0	4.9		5.0	0	5.0	0	0	5.0	5.0	5.0	0	5.0	5.0	0
PLAY	0	0	4.9	0	4.9		5.0	0	5.0	0	0	5.0	5.0	5.0	0	5.0	5.0	0
REC	0	0	4.9	0	4.9		5.0	0	5.0	0	0	5.0	5.0	5.0	0	5.0	5.0	0
F.F	0	1.0	0	0	0		5.0	0	5.0	0	0	5.0	5.0	5.0	0	5.0	5.0	0
REW	0	1.0	0	0	0		5.0	0	5.0	0	0	5.0	5.0	5.0	0	5.0	5.0	0

REF. NO.	QR6004			QR6009						QR6012			QR6013			QR6014		
MODE	E	C	B	1	2	3	4	5		E	C	B	E	C	B	E	C	B
STOP	0	0.9	1.7	5.1	0	0	0	0		0	0.1	4.3	0	0	7.0	0	0	4.9
PLAY	0	0.9	1.7	0.5	0	0	0	0		0	0.1	4.3	0	0	7.0	0	0	4.9
REC	0	1.0	1.7	5.1	0	0	0	0		0	0.1	4.3	0	0	7.0	0	0	4.9
F.F	0	1.0	1.7	5.1	0	0	0	0		0	0.1	4.3	0	0	7.0	0	0	4.9
REW	0	0.9	1.7	5.1	0	0	0	0		0	0.1	4.3	0	0	7.0	0	0	4.9

REF. NO.	QR6015		
MODE	E	C	B
STOP	5.2	0.3	5.0
PLAY	5.2	0.3	5.0
REC	5.2	0.3	5.0
F.F	5.2	0.3	5.0
REW	5.2	0.3	5.0

INPUT/OUTPUT CHART FOR IC6002 (M38024V1BK)

PIN NO.	I/O	PORT NAME	PIN NO.	I/O	PORT NAME	PIN NO.	I/O	PORT NAME
1	O	OSD CLK	20	I	L CLK	37	I	VITC OK (H)
2	O	OSD DATA	21	I	5P CLK	38	I	LANGUAGE 2
3	O	OSD CS	22	I	OSC IN	39	I	LANGUAGE 1
4	O	OSD ON (H)	23	O	OSC OUT	40	I	LANGUAGE 0
5, 6	–	—	24	–	GND	41-46	–	—
7	I	L CLK CNT	25	O	JOG LED (H)	47	O	BUS SELECT (B)
8	–	—	26	O	EDIT 21P	48	O	BUS SELECT (A)
9	I	SYS CLK	27	O	AV VTR (L)	49	I	CHECK (L)
10	O	SYS OUT	28	O	TBC SEARCH Ⓛ	50-56	–	—
11	I	SYS IN	29	O	TBC TRICK Ⓛ	57, 58	I	VDD
12	O	DATA INH	30	O	TBC ON Ⓛ	59	–	GND
13	I	CLK INPUT	31	–	—	60	I	EE DATA IN
14	O	DATA OUT	32	O	EDIT (H)	61	O	EE DATA OUT
15	I	DATA IN	33	I	TEST SIGNAL (H)	62	O	EE CLK
16, 17	–	—	34	I	OSD SECAM (H)	63	O	EE CS
18	–	GND	35	O	INSIDE (H)	64	I	REC/P1/P2
19	I	RESET (L)	36	I	SERCH MUTE OK (H)			

5. AUDIO SECTION IN MAIN & SUB AUDIO PACK SCHEMATIC DIAGRAM

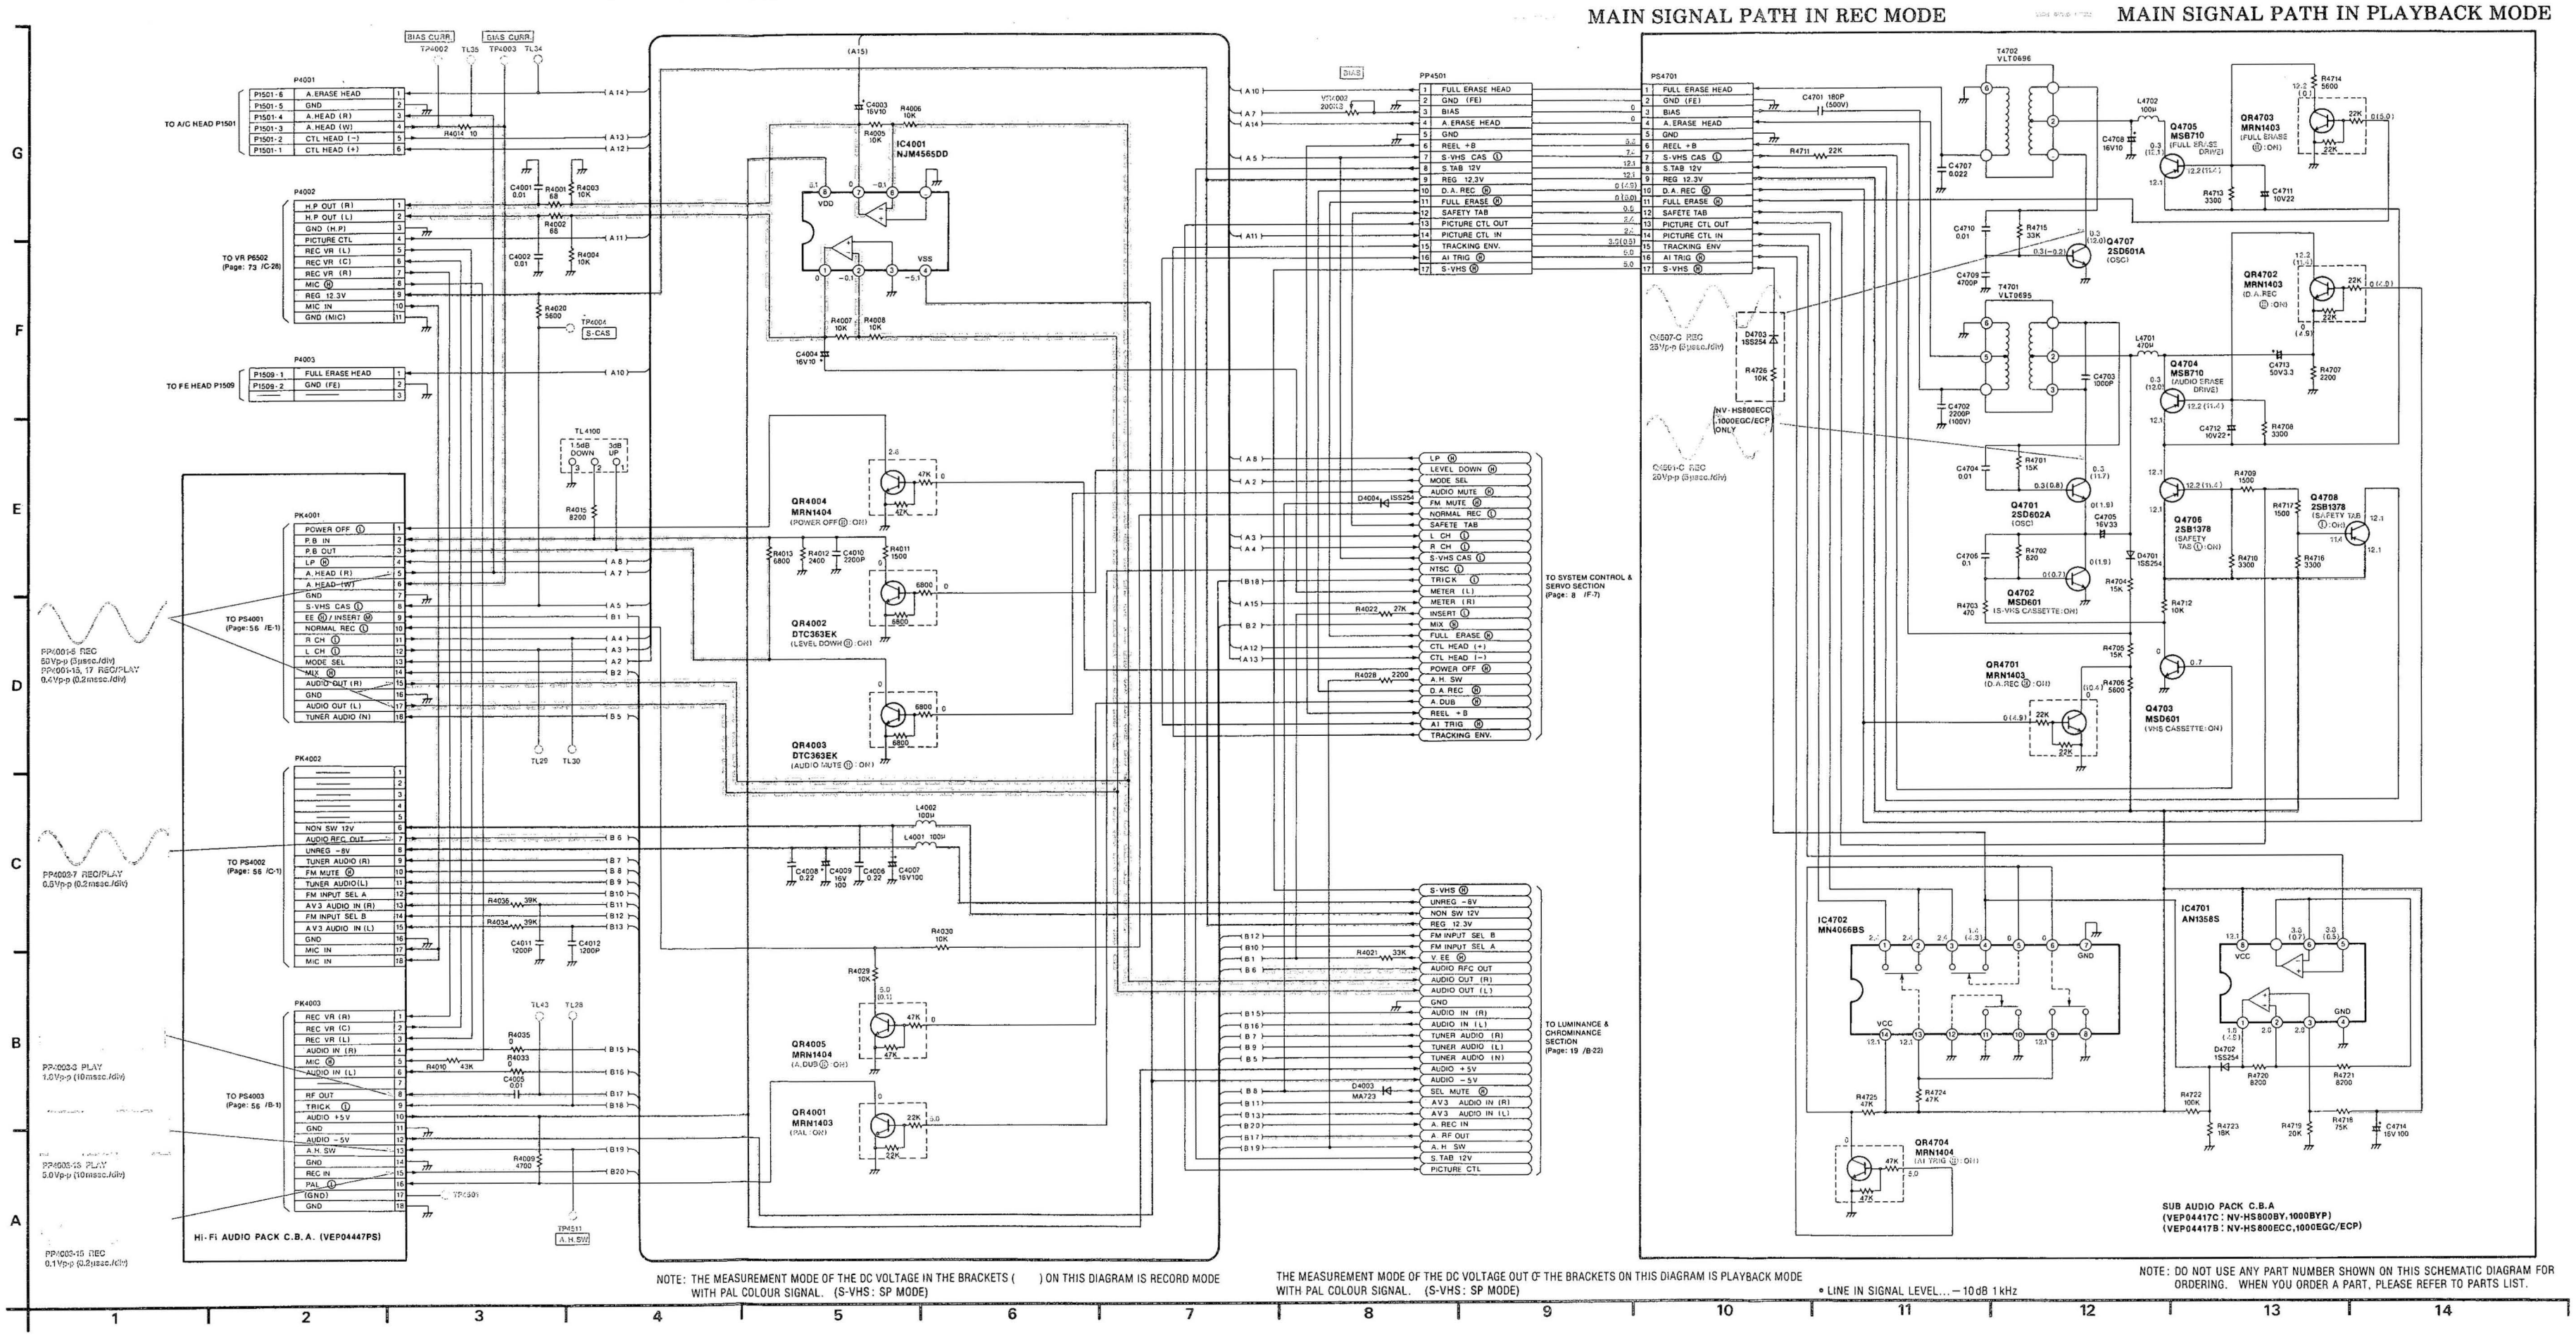
MAIN SIGNAL PATH IN REC MODE
MAIN SIGNAL PATH IN PLAYBACK MODE
TO A/C HEAD P1501
TO VR P6502 (Page: 73 /C-26)
TO FE HEAD P1509
TO PS4001 (Page: 56 /E-1)
TO PS4002 (Page: 56 /C-1)
TO PS4003 (Page: 56 /B-1)
IC4001 NJM4556DD
QR4004 MRN1404 (POWER OFF Ⓗ:ON)
QR4002 DTC363EK (LEVEL DOWN Ⓗ:ON)
QR4003 DTC363EK (AUDIO MUTE Ⓗ:ON)
QR4005 MRN1404 (A.DUB Ⓛ:ON)
QR4001 MRN1403 (PAL:ON)
Hi-Fi AUDIO PACK C.B.A. (VEP04447PS)
TO SYSTEM CONTROL & SERVO SECTION (Page: 8 /F-7)
TO LUMINANCE & CHROMINANCE SECTION (Page: 19 /B-22)
Q4705 MSB710 (FULL ERASE DRIVE)
QR4703 MRN1403 (FULL ERASE Ⓗ:ON)
Q4707 2SD601A (OSC)
QR4702 MRN1403 (D.A.REC Ⓗ:ON)
Q4704 MSB710 (AUDIO ERASE DRIVE)
Q4701 2SD602A (OSC)
Q4706 2SB1378 (SAFETY TAB Ⓛ:ON)
Q4708 2SB1378 (SAFETY TAB Ⓛ:ON)
Q4702 MSD601 (S-VHS CASSETTE:ON)
QR4701 MRN1403 (D.A.REC Ⓗ:ON)
Q4703 MSD601 (VHS CASSETTE:ON)
IC4702 MN4066BS
IC4701 AN1358S
QR4704 MRN1404 (AI TRIG Ⓗ:ON)
T4702 VLT0696
T4701 VLT0695
NV-HS800ECC, 1000EGC/ECP ONLY
SUB AUDIO PACK C.B.A
(VEP04417C: NV-HS800BY,1000BYP)
(VEP04417B: NV-HS800ECC,1000EGC/ECP)
PP4001-5 REC 50Vp-p (5μsec./div)
PP4001-15, 17 REC/PLAY 0.4Vp-p (0.2msec./div)
PP4002-7 REC/PLAY 0.5Vp-p (0.2msec./div)
PP4003-3 PLAY 1.0Vp-p (10msec./div)
PP4003-13 PLAY 5.0Vp-p (10msec./div)
PP4003-15 REC 0.1Vp-p (0.2msec./div)
QS507-C REC 23Vp-p (5μsec./div)
QS501-C REC 20Vp-p (5μsec./div)
A
B
C
D
E
F
G
1
2
3
4
5
6
7
8
9
10
11
12
13
14

NOTE: THE MEASUREMENT MODE OF THE DC VOLTAGE IN THE BRACKETS ( ) ON THIS DIAGRAM IS RECORD MODE WITH PAL COLOUR SIGNAL. (S-VHS: SP MODE)

THE MEASUREMENT MODE OF THE DC VOLTAGE OUT OF THE BRACKETS ON THIS DIAGRAM IS PLAYBACK MODE WITH PAL COLOUR SIGNAL. (S-VHS: SP MODE)

• LINE IN SIGNAL LEVEL... −10dB 1kHz

NOTE: DO NOT USE ANY PART NUMBER SHOWN ON THIS SCHEMATIC DIAGRAM FOR ORDERING. WHEN YOU ORDER A PART, PLEASE REFER TO PARTS LIST.

6 LUMINANCE & CHROMINANCE SECTION IN MAIN SCHEMATIC DIAGRAM

VIDEO MAIN SIGNAL PATH IN REC MODE
VIDEO MAIN SIGNAL PATH IN PLAYBACK MODE
AUDIO MAIN SIGNAL PATH IN REC MODE
AUDIO MAIN SIGNAL PATH IN PLAYBACK MODE

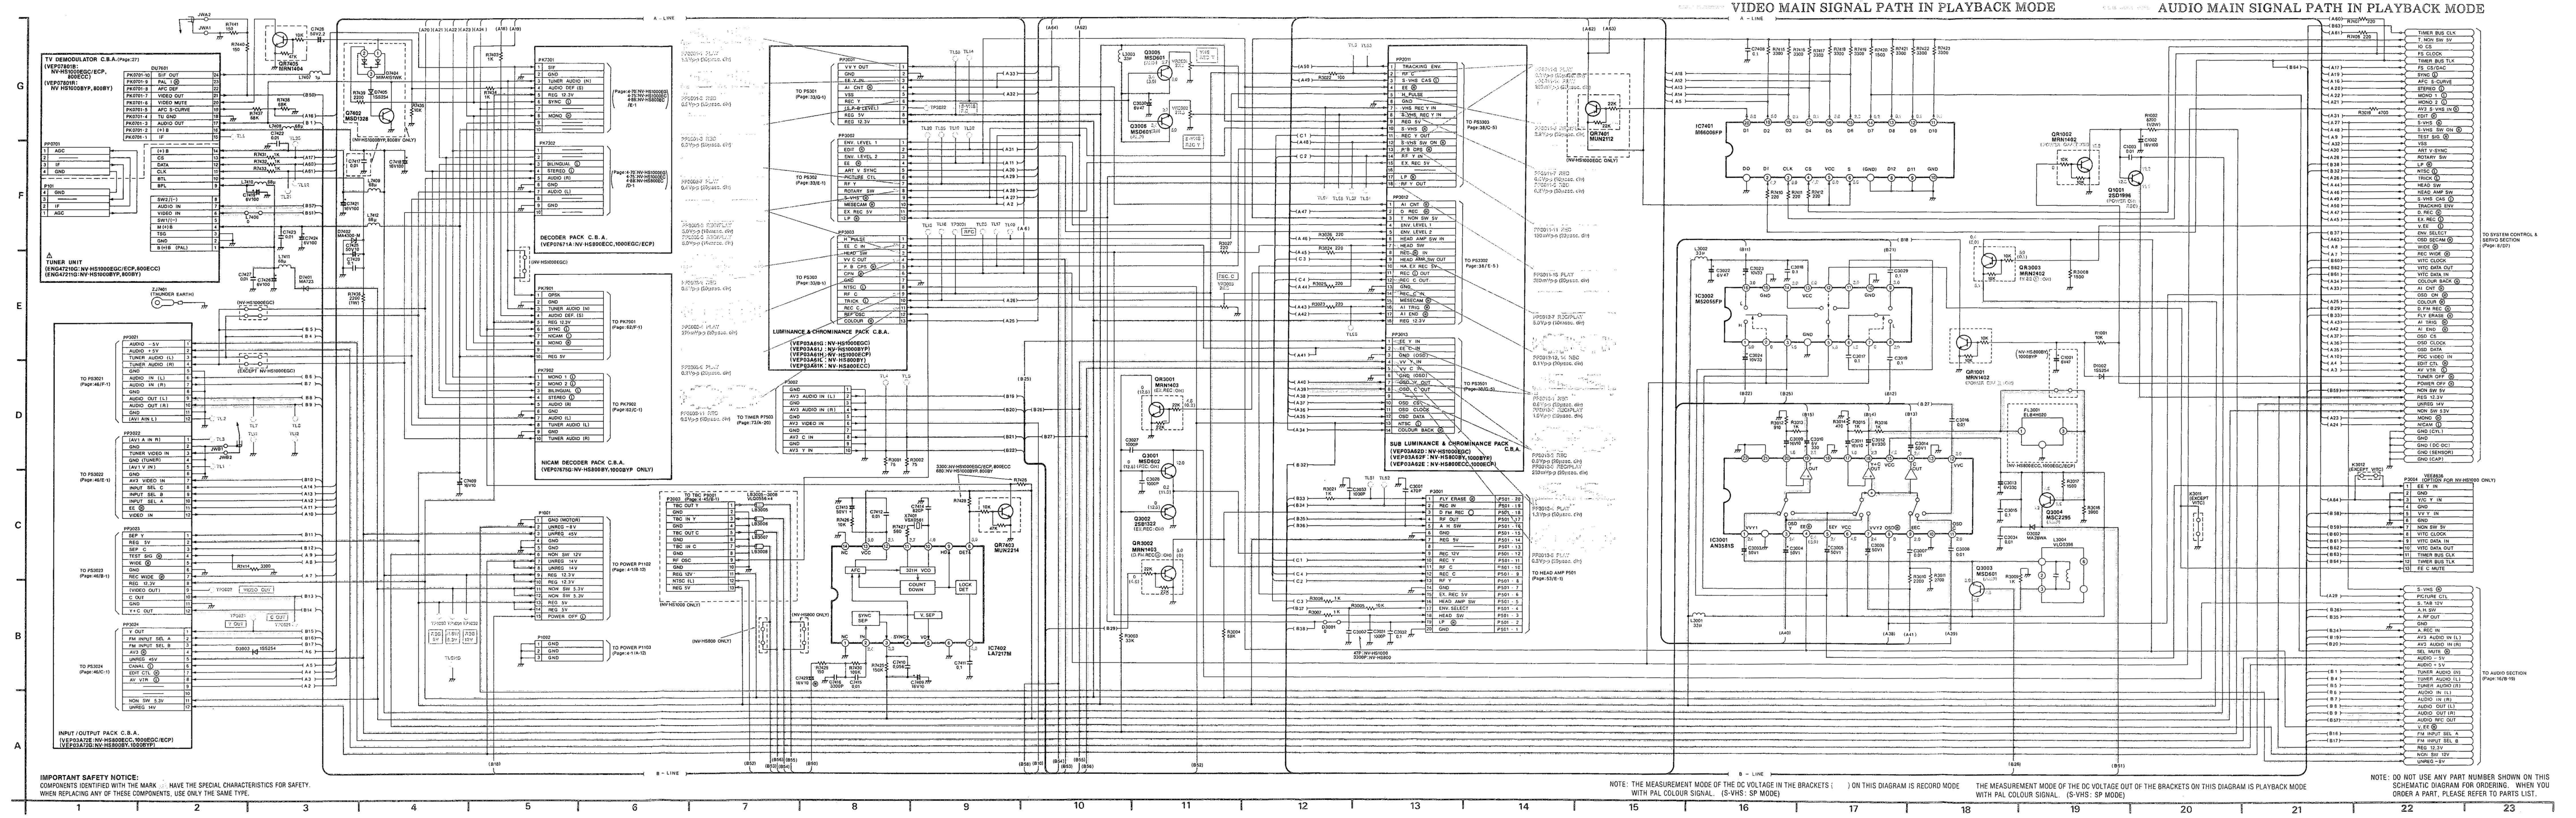
TV DEMODULATOR C.B.A. (Page:27)
TUNER UNIT
INPUT / OUTPUT PACK C.B.A.
(VEP03A72E: NV-HS800ECC,1000EGC/ECP)
(VEP03A72G: NV-HS800BY,1000BYP)
DECODER PACK C.B.A.
NICAM DECODER PACK C.B.A.
LUMINANCE & CHROMINANCE PACK C.B.A.
SUB LUMINANCE & CHROMINANCE PACK C.B.A.
IC7402 LA7217M
IC7401 M66008FP
IC3002 M52055FP
IC3001 AN3581S
TO AUDIO SECTION
TO SYSTEM CONTROL & SERVO SECTION
A – LINE
B – LINE
A
B
C
D
E
F
G
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23

IMPORTANT SAFETY NOTICE:
COMPONENTS IDENTIFIED WITH THE MARK ⚠ HAVE THE SPECIAL CHARACTERISTICS FOR SAFETY.
WHEN REPLACING ANY OF THESE COMPONENTS, USE ONLY THE SAME TYPE.

NOTE: THE MEASUREMENT MODE OF THE DC VOLTAGE IN THE BRACKETS ( ) ON THIS DIAGRAM IS RECORD MODE WITH PAL COLOUR SIGNAL. (S-VHS: SP MODE)

THE MEASUREMENT MODE OF THE DC VOLTAGE OUT OF THE BRACKETS ON THIS DIAGRAM IS PLAYBACK MODE WITH PAL COLOUR SIGNAL. (S-VHS: SP MODE)

NOTE: DO NOT USE ANY PART NUMBER SHOWN ON THIS SCHEMATIC DIAGRAM FOR ORDERING. WHEN YOU ORDER A PART, PLEASE REFER TO PARTS LIST.

7. MAIN C.B.A. (VEP03C01L: NV-HS1000EGC) (VEP03C01P: NV-HS1000BYP) (VEP03C01R: NV-HS1000ECP) (VEP03C01T: NV-HS800BY) (VEP03C01K: NV-HS800ECC) & SUB AUDIO PACK C B A (VEP04417B: NV-HS1000EGC/ECP, 800ECC), (VEP04417C: NV-HS1000BYP, 800BY) and CYLINDER DRIVE C.B.A. (VEX0235)

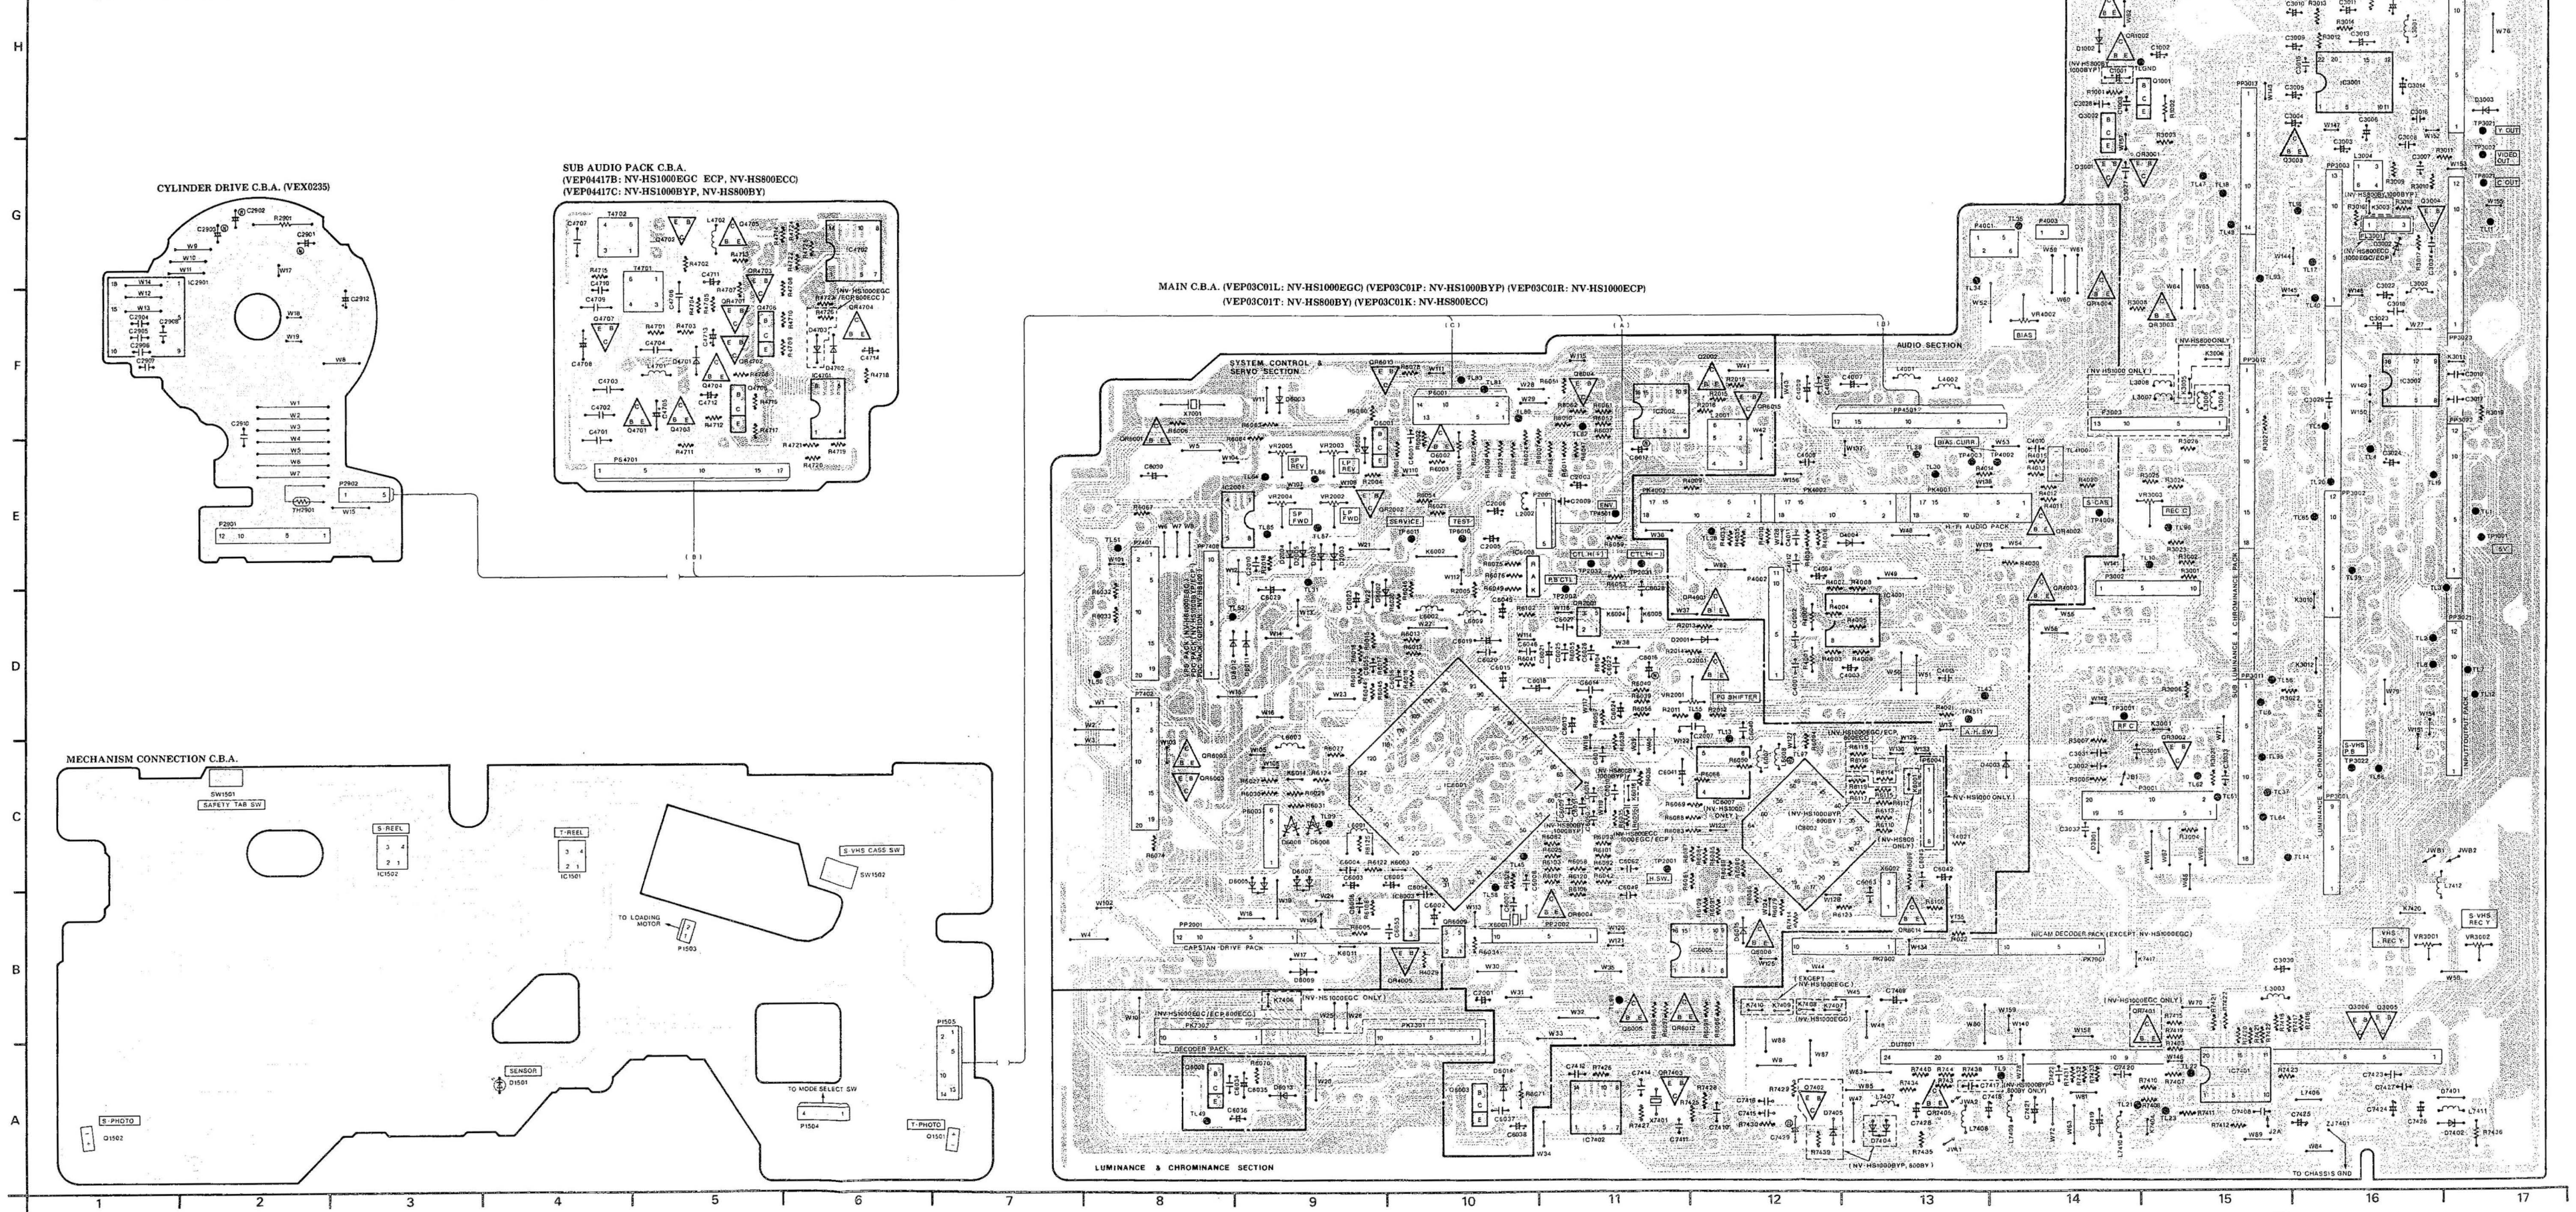
CYLINDER DRIVE C.B.A. (VEX0235)
SUB AUDIO PACK C.B.A.
(VEP04417B: NV-HS1000EGC ECP, NV-HS800ECC)
(VEP04417C: NV-HS1000BYP, NV-HS800BY)
MAIN C.B.A. (VEP03C01L: NV-HS1000EGC) (VEP03C01P: NV-HS1000BYP) (VEP03C01R: NV-HS1000ECP)
(VEP03C01T: NV-HS800BY) (VEP03C01K: NV-HS800ECC)
SYSTEM CONTROL & SERVO SECTION
AUDIO SECTION
LUMINANCE & CHROMINANCE SECTION
MECHANISM CONNECTION C.B.A.
CAPSTAN DRIVE PACK
DECODER PACK
TO CHASSIS GND
H
G
F
E
D
C
B
A
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17

MAIN C B A ADDRESS INFORMATION

SYSTEM CONTROL & SERVO Section	
Transistor	
Q1501	A-7
Q1502	A-1
Q2001	D-12
Q2002	F-12
Q6001	E-9
Q6002	E-10
Q6003	A-10
Q6004	F-11
Q6005	B-11
Q6006	B-12
Q6008	A-8
Transistor & Resistor	
QR2001	D-11
QR2002	E-9
QR6001	E-8
QR6002	C-8
QR6003	C-8
QR6004	B-11
QR6009	B-10
QR6012	B-11
QR6013	F-9
QR6014	B-13
QR6015	F-12
Integrated Circuit	
IC1501	C-4
IC1502	C-3
IC2001	E-9
IC2002	F-11
IC2901	F-1
IC6001	C-10
IC6002	C-12
IC6003	B-10
IC6005	B-12
IC6007	C-12
IC6008	E-10
Test Point	
TP2001	C-11
TP2002	D-11
TP2031	E-11
TP2032	E-11
TP6010	E-10
TP6011	E-10
Adjustment	
VR2001	D-12
VR2002	E-9
VR2003	E-9
VR2004	E-9
VR2005	E-9
Connector	
P1503	B-5
P1504	A-6
P1505	B-7
P2001	E-11
P2901	E-2
P2902	E-3
P6001	F-10
P6003	C-9
P6004	C-13
P7401	E-8
P7402	D-8
PP2001	B-8
PP2002	B-11
PP7406	E-8

ADDRESS INFORMATION

LUMINANCE & CHROMINANCE Section	
Transistor	
Q1001	H-15
Q3001	G-14
Q3002	H-14
Q3003	G-15
Q3004	G-16
Q3005	B-16
Q3006	B-16
Transistor & Resistor	
QR1001	H-14
QR1002	H-14
QR3001	G-15
QR3002	C-15
QR3003	F-15
QR7401	B-15
QR7402	A-12
QR7403	A-11
QR7405	A-13
Integrated Circuit	
IC3001	H-16
IC3002	F-16
IC7401	A-15
IC7402	A-11
Test Point	
TP1001	E-17
TP1002	H-15
TP1003	H-15
TP3001	D-14
TP3002	G-17
TP3021	G-17
TP3022	C-16
TP8021	G-17
Adjustment	
VR3001	B-16
VR3002	B-17
VR3003	E-15
Connector	
P1001	H-15
P1002	H-16
P3001	C-15
P3002	D-14
PK7301	B-10
PK7302	B-8
PK7901	B-14
PK7902	B-13
PP3001	C-16
PP3002	E-16
PP3003	G-16
PP3011	D-15
PP3012	F-15
PP3013	H-15
PP3021	D-17
PP3022	E-17
PP3023	F-17
PP3024	H-17
PP7401	A-16
PP7402	A-14
PP7403	A-13
PP7404	A-11
PP7405	B-17

ADDRESS INFORMATION

AUDIO Section & SUB AUDIO PACK C.B.A.	
Transistor	
Q4701	F-5
Q4702	G-5
Q4703	F-5
Q4704	F-5
Q4705	G-5
Q4706	F-5
Q4707	F-4
Q4708	F-5
Transistor & Resistor	
QR4001	D-12
QR4002	E-14
QR4003	D-14
QR4004	F-14
QR4005	B-10
QR4701	F-5
QR4702	F-5
QR4703	G-5
QR4704	F-6
Integrated Circuit	
IC4001	D-13
IC4701	F-6
IC4702	G-6
Adjustment	
VR4002	F-14
Test Point	
TP4002	E-14
TP4003	E-13
TP4004	E-14
TP4501	E-11
TP4511	D-13
Connector	
P4001	G-14
P4002	D-12
P4003	G-14
PP4001	E-13
PP4002	E-12
PP4003	E-11
PP4501	F-13
PS4701	E-4

ADDRESS INFORMATION

8. TV DEMODULATOR SCHEMATIC DIAGRAM

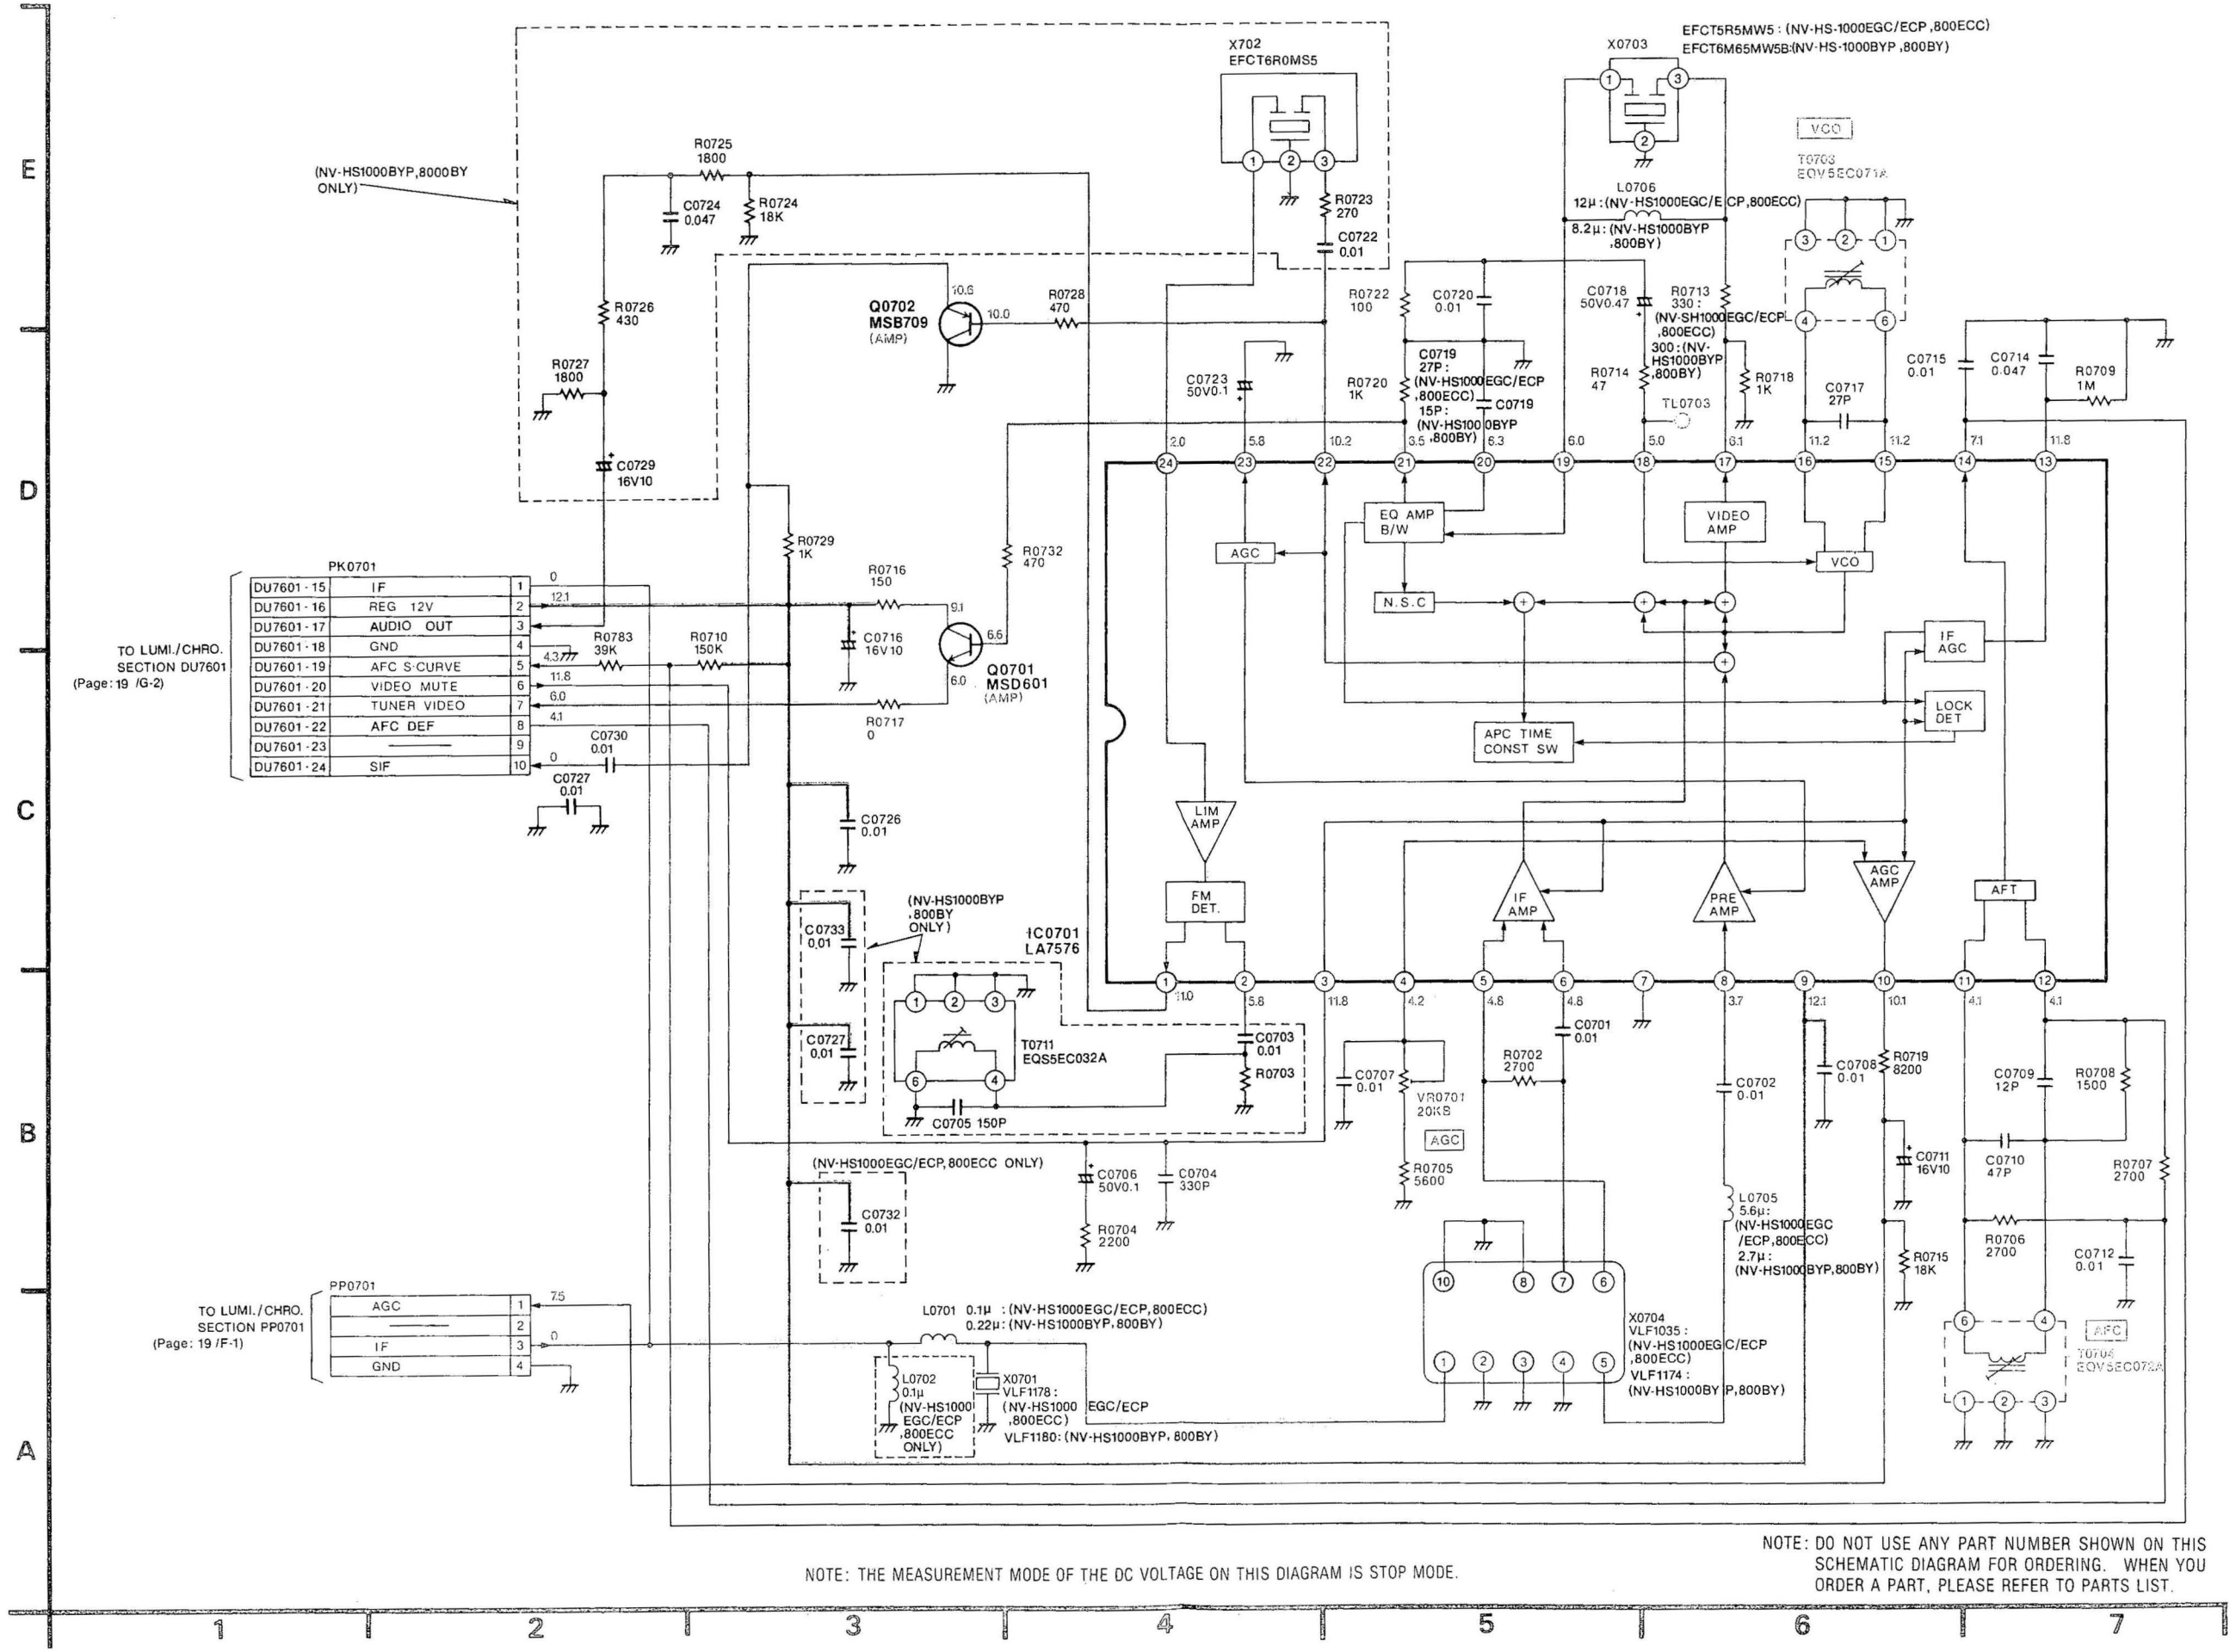
VIDEO SIGNAL PATH
AUDIO SIGNAL PATH
(NV-HS1000BYP,8000BY ONLY)
X702 EFCT6R0MS5
X0703
EFCT5R5MW5 : (NV-HS-1000EGC/ECP,800ECC)
EFCT6M65MW5B:(NV-HS-1000BYP,800BY)
L0706 12μ : (NV-HS1000EGC/ECP,800ECC) 8.2μ : (NV-HS1000BYP,800BY)
VCO T0703 EQV5EC071A
Q0702 MSB709 (AMP)
Q0701 MSD601 (AMP)
IC0701 LA7576
PK0701
TO LUMI./CHRO. SECTION DU7601 (Page: 19 /G-2)
DU7601-15 IF 1
DU7601-16 REG 12V 2
DU7601-17 AUDIO OUT 3
DU7601-18 GND 4
DU7601-19 AFC S-CURVE 5
DU7601-20 VIDEO MUTE 6
DU7601-21 TUNER VIDEO 7
DU7601-22 AFC DEF 8
DU7601-23 9
DU7601-24 SIF 10
EQ AMP B/W
AGC
N.S.C
VIDEO AMP
VCO
IF AGC
LOCK DET
APC TIME CONST SW
LIM AMP
FM DET.
IF AMP
PRE AMP
AGC AMP
AFT
T0711 EQS5EC032A
C0705 150P
VR0701 20KB
(NV-HS1000EGC/ECP,800ECC ONLY)
L0705 5.6μ : (NV-HS1000EGC/ECP,800ECC) 2.7μ : (NV-HS1000BYP,800BY)
X0704 VLF1035 : (NV-HS1000EGC/ECP,800ECC) VLF1174 : (NV-HS1000BYP,800BY)
AFC T0704 EQV5EC072A
PP0701
TO LUMI./CHRO. SECTION PP0701 (Page: 19 /F-1)
AGC 1
2
IF 3
GND 4
L0701 0.1μ : (NV-HS1000EGC/ECP,800ECC) 0.22μ : (NV-HS1000BYP,800BY)
L0702 0.1μ (NV-HS1000EGC/ECP,800ECC ONLY)
X0701 VLF1178 : (NV-HS1000EGC/ECP,800ECC) VLF1180 : (NV-HS1000BYP, 800BY)
E
D
C
B
A
1
2
3
4
5
6
7

NOTE: THE MEASUREMENT MODE OF THE DC VOLTAGE ON THIS DIAGRAM IS STOP MODE.

NOTE: DO NOT USE ANY PART NUMBER SHOWN ON THIS SCHEMATIC DIAGRAM FOR ORDERING. WHEN YOU ORDER A PART, PLEASE REFER TO PARTS LIST.

9. TV DEMODULATOR C.B A
(VEP07801B: NV-HS1000EGC/ECP, NV-HS800ECC)
(VEP07801R: NV-HS1000BYP, NV-HS800BY)

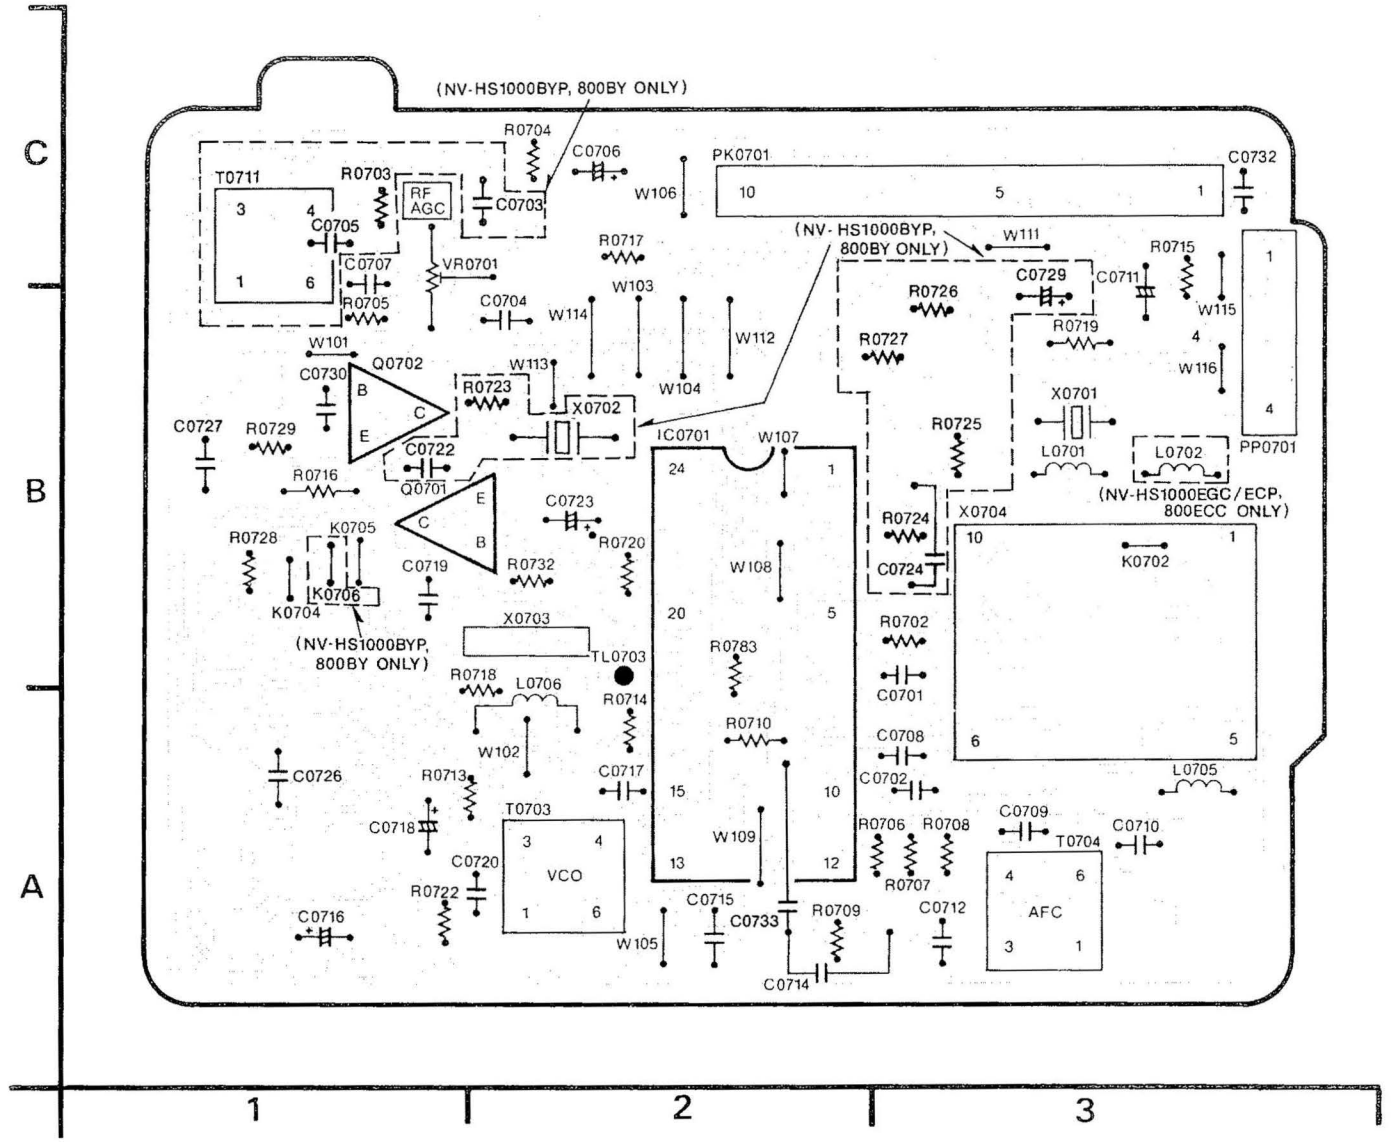
(NV-HS1000BYP, 800BY ONLY)
PK0701
T0711
RF AGC
VR0701
Q0702
Q0701
X0702
IC0701
X0703
TL0703
T0703
VCO
T0704
AFC
X0704
K0702
PP0701
(NV-HS1000EGC/ECP, 800ECC ONLY)
C
B
A
1
2
3

TV DEMODULATOR PACK C.B.A.	
Transistor	
Q0701 Q0702	B-1 B-1
Integrated Circuit	
IC0701	B-2
Test Point	
TL0703	B-2
Adjustment	
T0703 T0704 VR0701	A-2 A-3 C-1
Connector	
PK0701 PP0701	C-2 C-3

ADDRESS INFORMATION

10 LUMINANCE & CHROMINANCE PACK C B A. (VEP03A61G: NV-HS1000EGC) (VEP03A61J: NV-HS1000BYP) (VEP03A61H: NV-HS1000ECP) (VEP03A61L: NV-HS800BY) (VEP03A61K: NV-HS800ECC)

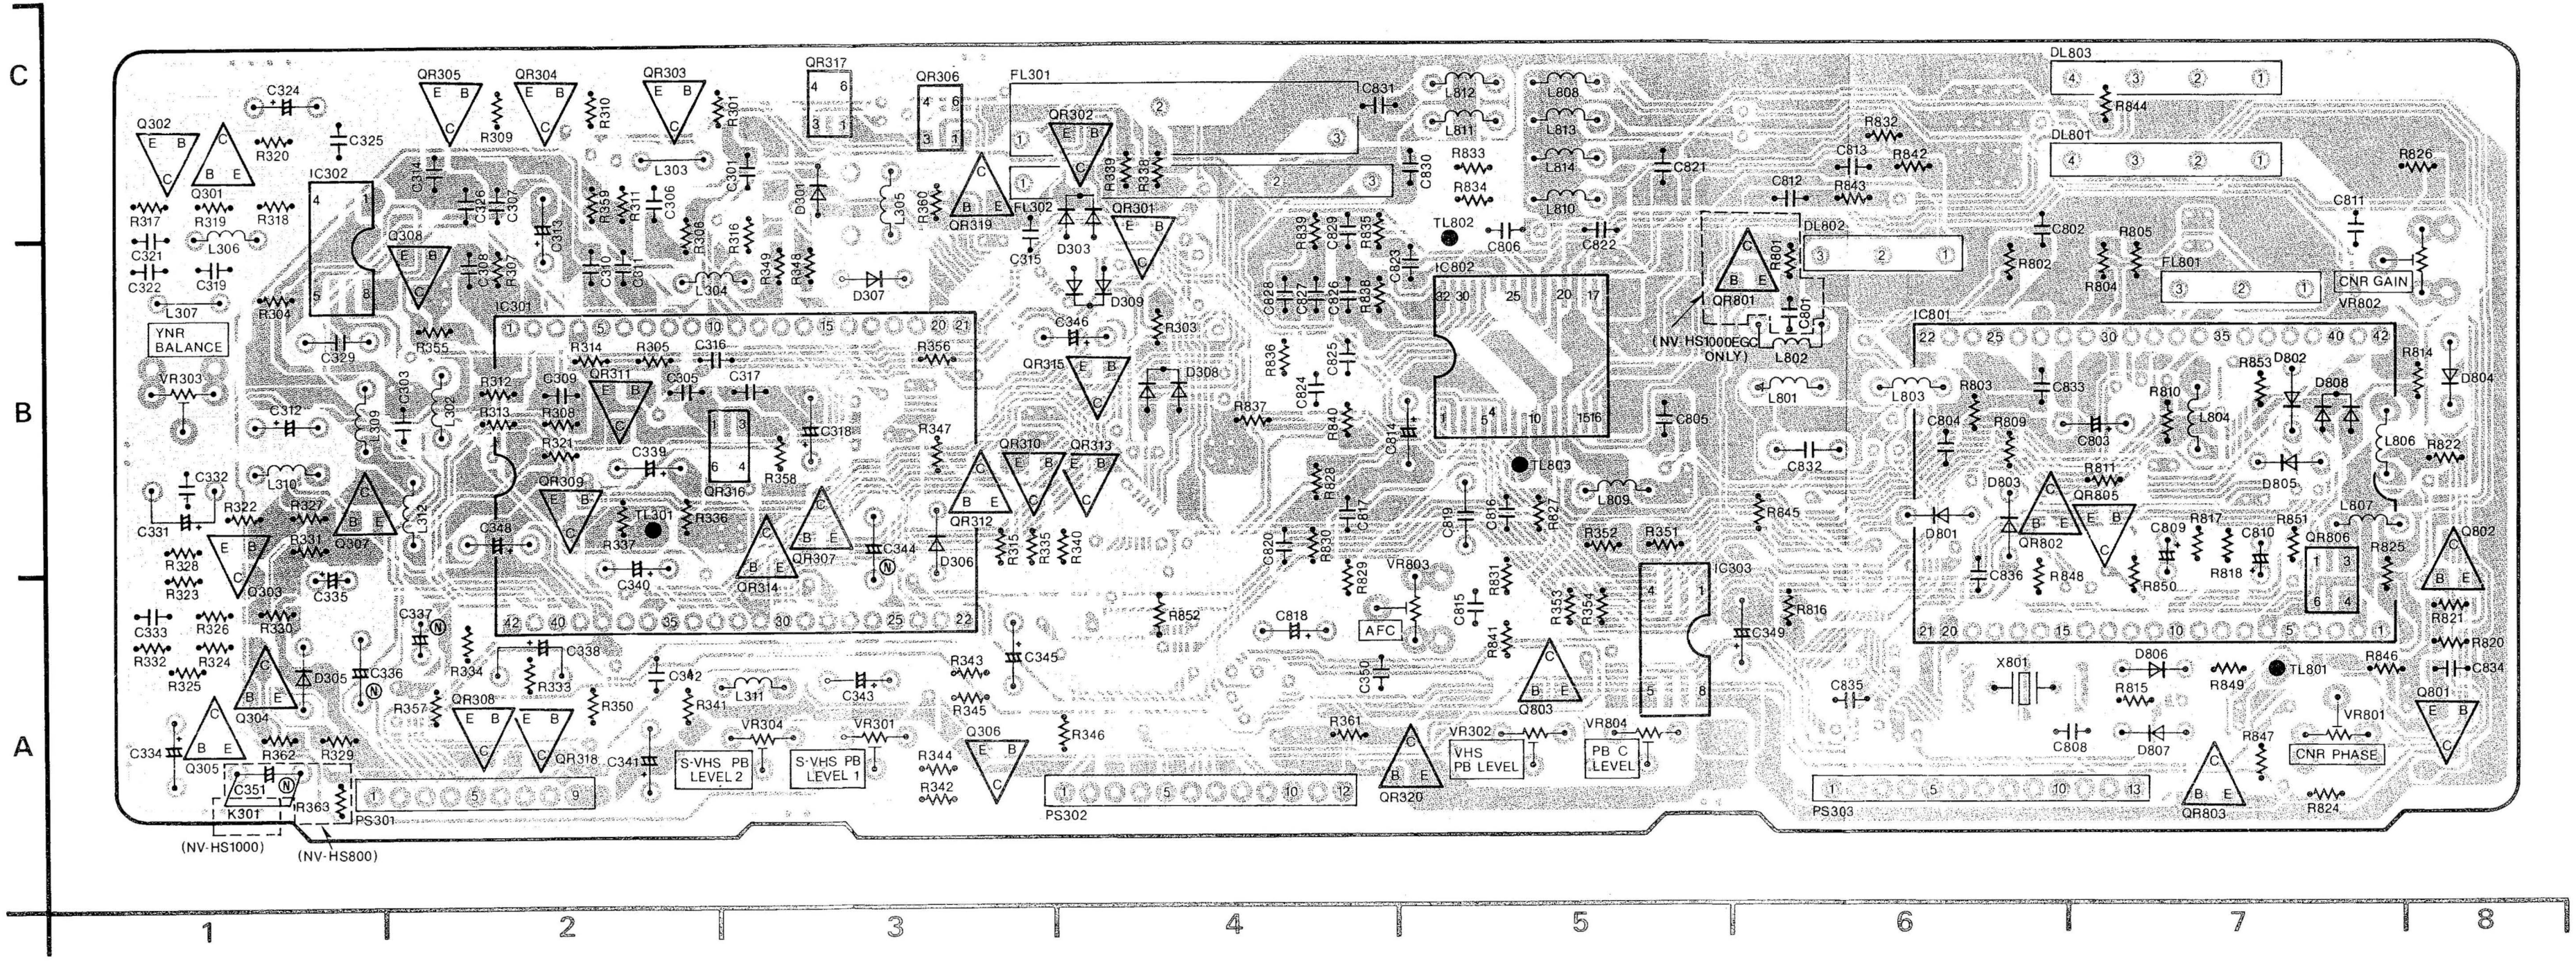

C
B
A
1
2
3
4
5
6
7
8
IC301
IC302
IC303
IC801
IC802
YNR BALANCE
VR303
S-VHS PB LEVEL 2
VR304
S-VHS PB LEVEL 1
VR301
VHS PB LEVEL
VR302
PB C LEVEL
VR804
AFC
VR803
CNR GAIN
VR802
CNR PHASE
VR801
PS301
PS302
PS303
K301
(NV-HS1000)
(NV-HS800)
(NV-HS1000EGC ONLY)
FL301
FL302
FL801
DL801
DL802
DL803
X801
TL301
TL801
TL802
TL803

LUMINANCE & CHROMINANCE PACK C.B.A.	
Transistor	
Q301	C-1
Q302	C-1
Q303	A-1
Q304	A-1
Q305	A-1
Q306	A-3
Q307	B-1
Q308	B-2
Q801	A-8
Q802	B-8
Q803	A-5
Transistor & Resistor	
QR301	C-4
QR302	C-4
QR303	C-2
QR304	C-2
QR305	C-2
QR306	C-3
QR307	B-3
QR308	A-2
QR309	B-2
QR310	B-3
QR311	B-2
QR312	B-3
QR313	B-4
QR314	B-3
QR315	B-4
QR316	B-3
QR317	C-3
QR318	A-2
QR319	C-3
QR320	A-5
QR801	B-5
QR802	B-6
QR803	A-7
QR805	B-7
QR806	B-7
Integrated Circuit	
IC301	B-2
IC302	C-1
IC303	A-5
IC801	B-6
IC802	B-5
Adjustment	
VR301	A-3
VR302	A-5
VR303	B-1
VR304	A-3
VR801	A-7
VR802	B-7
VR803	A-5
VR804	A-5
Connector	
PS301	A-2
PS302	A-4
PS303	A-6

ADDRESS INFORMATION

11. LUMINANCE & CHROMINANCE PACK SCHEMATIC DIAGRAM

MAIN SIGNAL PATH IN REC MODE

MAIN SIGNAL PATH IN PLAYBACK MODE

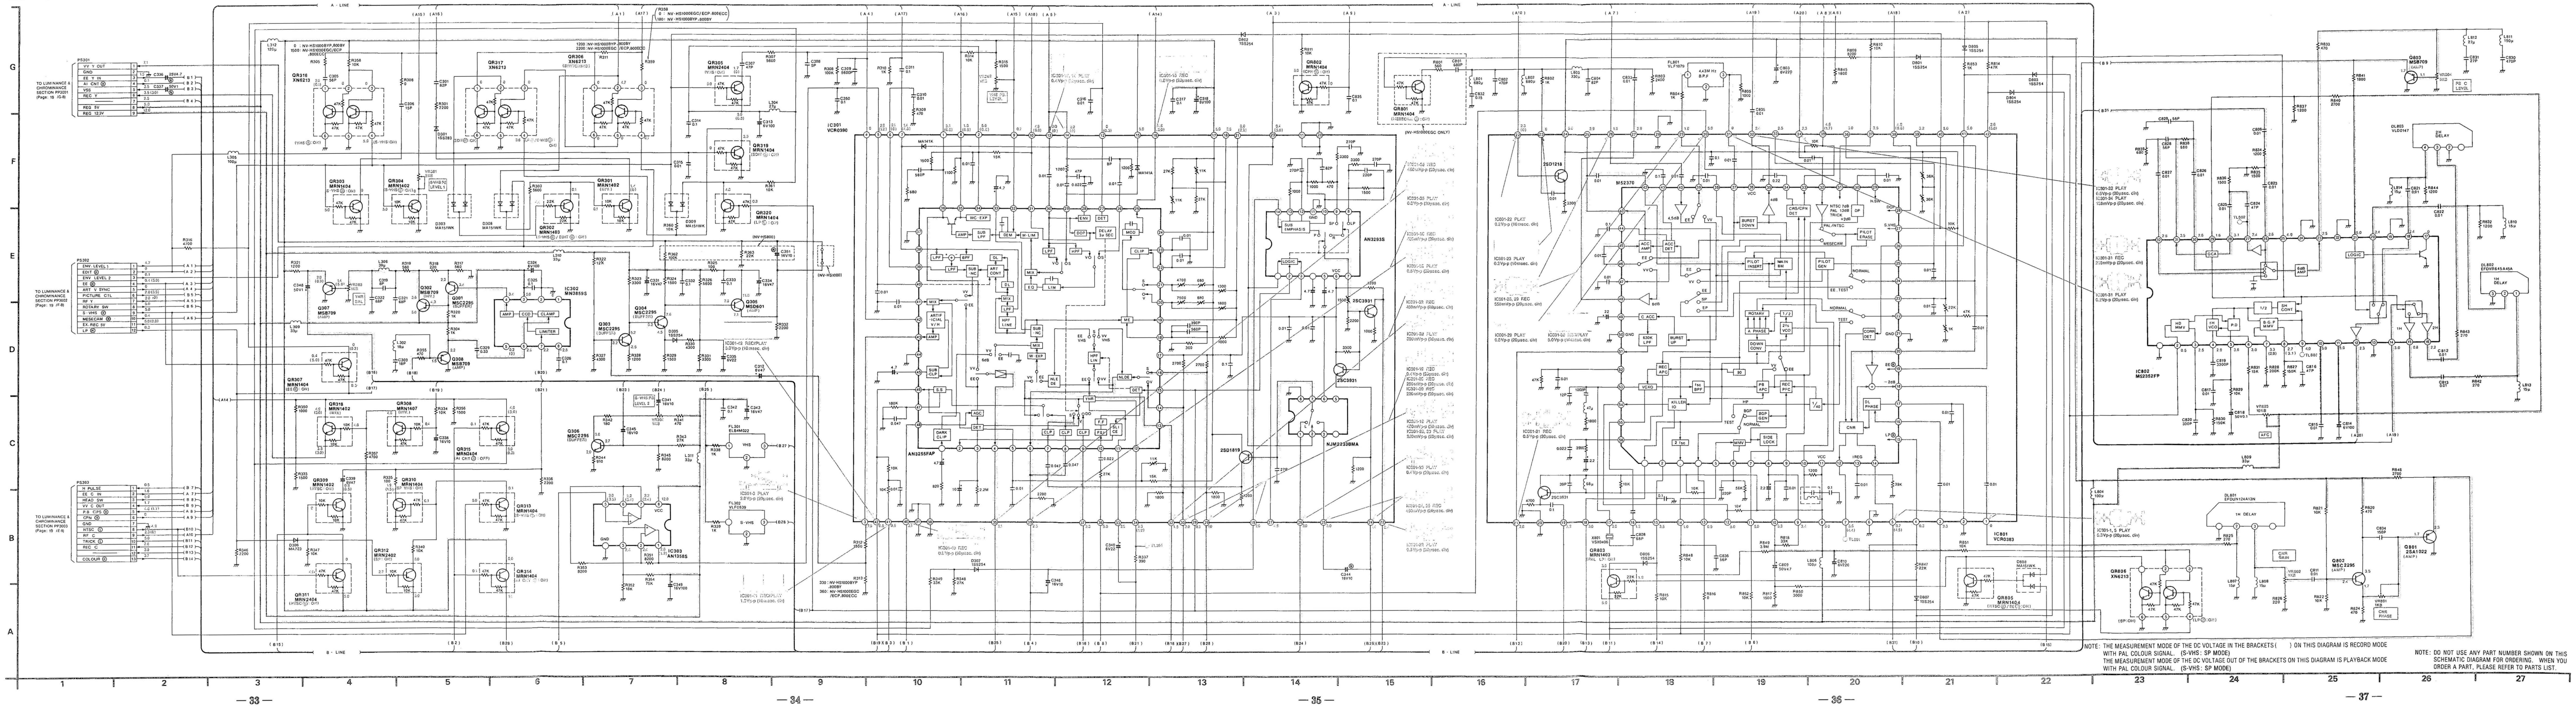
A - LINE
B - LINE
G
F
E
D
C
B
A
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
TO LUMINANCE & CHROMINANCE SECTION PP201
TO LUMINANCE & CHROMINANCE SECTION PP302
TO LUMINANCE & CHROMINANCE SECTION PP303
AN3255FAP
AN3203S
NJM2233BMA
M52370
IC801 VCR0383
IC802 M52352FP

NOTE: THE MEASUREMENT MODE OF THE DC VOLTAGE IN THE BRACKETS (   ) ON THIS DIAGRAM IS RECORD MODE WITH PAL COLOUR SIGNAL. (S-VHS: SP MODE)
THE MEASUREMENT MODE OF THE DC VOLTAGE OUT OF THE BRACKETS ON THIS DIAGRAM IS PLAYBACK MODE WITH PAL COLOUR SIGNAL. (S-VHS: SP MODE)

NOTE: DO NOT USE ANY PART NUMBER SHOWN ON THIS SCHEMATIC DIAGRAM FOR ORDERING. WHEN YOU ORDER A PART, PLEASE REFER TO PARTS LIST.

12 SUB LUMINANCE & CHROMINANCE PACK SCHEMATIC DIAGRAM

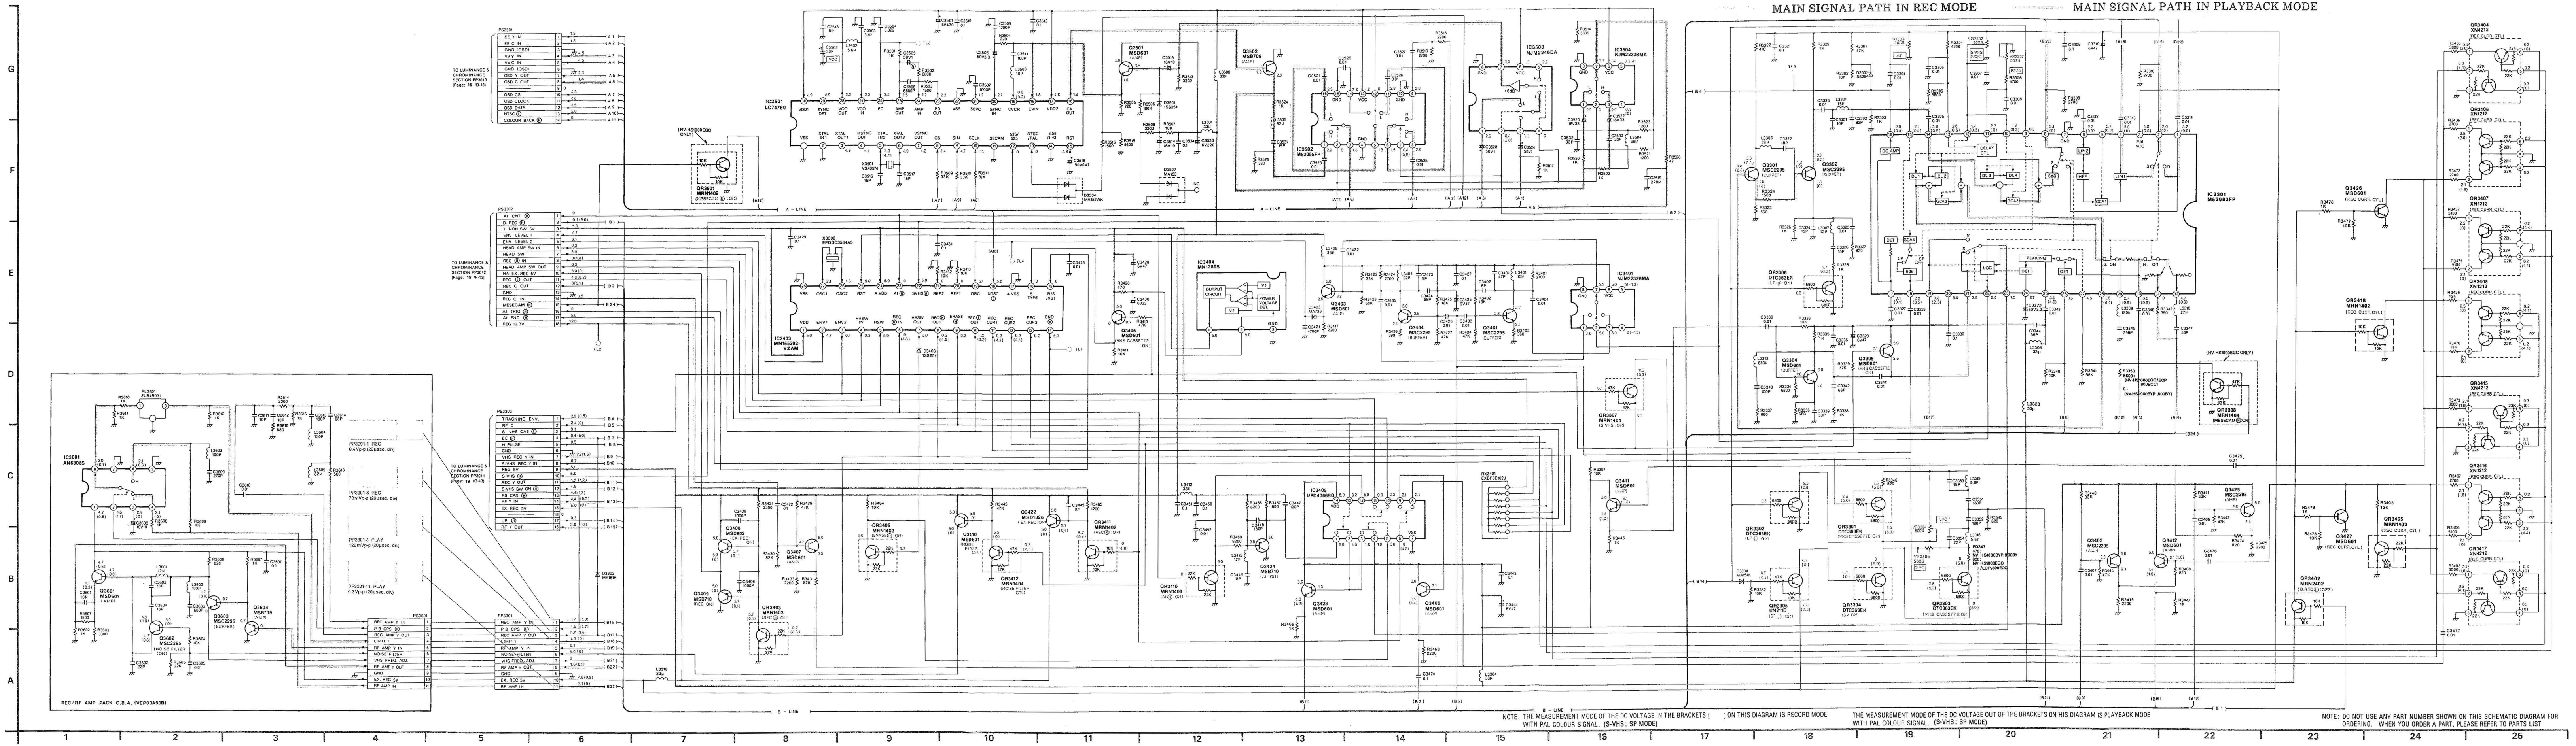
MAIN SIGNAL PATH IN REC MODE
MAIN SIGNAL PATH IN PLAYBACK MODE
IC3501 LC74760
IC3503 NJM2244DA
IC3504 NJM2233BMA
IC3403 MN1E5392-VZAM
IC3404 MN1280S
IC3401 NJM2233BMA
IC3402 µPC4066BG
IC3301 M52083FP
IC3601 AN6308S
TO LUMINANCE & CHROMINANCE SECTION PP3012 (Page: 18 (E-13))
REC/RF AMP PACK C.B.A. (VEP03A90B)
A – LINE
B – LINE
G
F
E
D
C
B
A
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25

NOTE: THE MEASUREMENT MODE OF THE DC VOLTAGE IN THE BRACKETS ( ) ON THIS DIAGRAM IS RECORD MODE WITH PAL COLOUR SIGNAL. (S-VHS: SP MODE)
THE MEASUREMENT MODE OF THE DC VOLTAGE OUT OF THE BRACKETS ON HIS DIAGRAM IS PLAYBACK MODE WITH PAL COLOUR SIGNAL. (S-VHS: SP MODE)

NOTE: DO NOT USE ANY PART NUMBER SHOWN ON THIS SCHEMATIC DIAGRAM FOR ORDERING. WHEN YOU ORDER A PART, PLEASE REFER TO PARTS LIST

13 SUB LUMINANCE & CHROMINANCE PACK C.B.A. (VEP03A62D: NV-HS1000EGC) (VEP03A62F: NV-HS1000BYP, NV-HS800BY) (VEP03A62E: NV-HS1000ECP, NV-HS800ECC) & REC/RF AMP PACK C.B.A. (VEP03A90B)

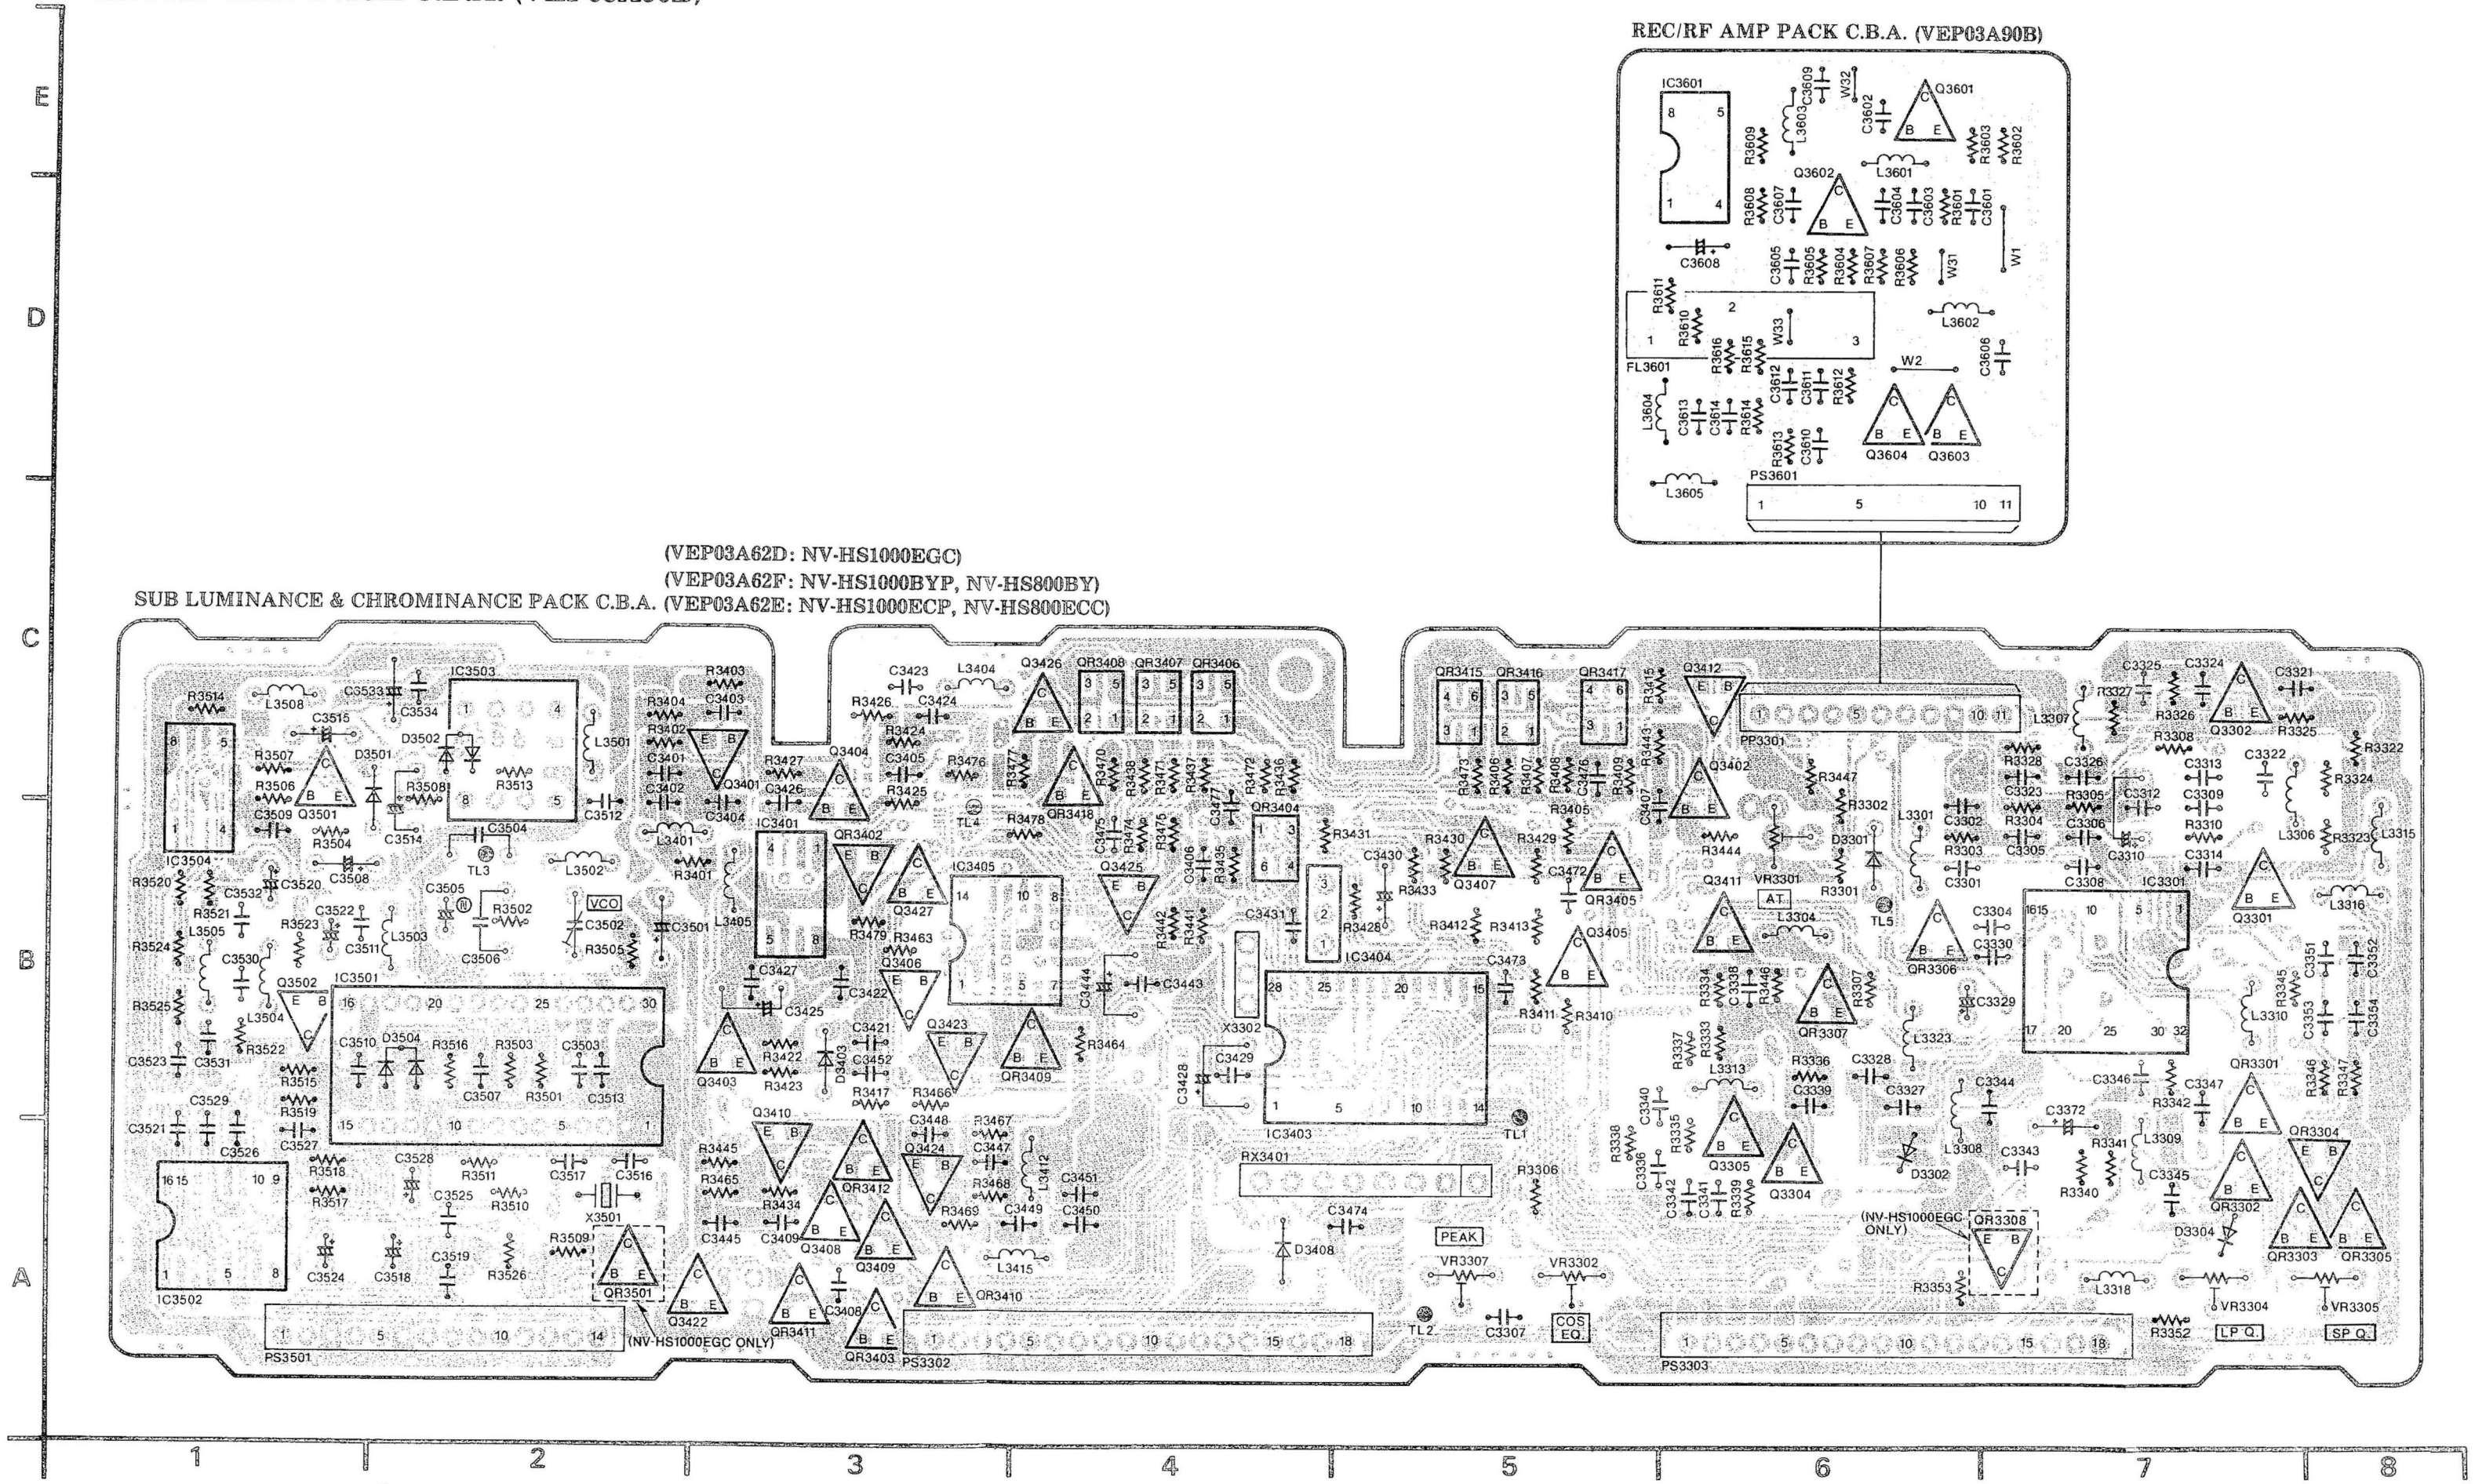
REC/RF AMP PACK C.B.A. (VEP03A90B)
(VEP03A62D: NV-HS1000EGC)
(VEP03A62F: NV-HS1000BYP, NV-HS800BY)
SUB LUMINANCE & CHROMINANCE PACK C.B.A. (VEP03A62E: NV-HS1000ECP, NV-HS800ECC)
E
D
C
B
A
1
2
3
4
5
6
7
8
IC3601
FL3601
PS3601
Q3601
Q3602
Q3603
Q3604
IC3501
IC3502
IC3503
IC3504
IC3401
IC3403
IC3404
IC3405
IC3301
PS3501
PS3302
PS3303
PP3301
RX3401
VCO
PEAK
COS EQ.
LP Q.
SP Q.
AT
VR3301
VR3302
VR3304
VR3305
VR3307
TL1
TL2
TL3
TL4
TL5
X3501
X3302
(NV-HS1000EGC ONLY)
(NV-HS1000EGC ONLY)

SUB LUMINANCE & CHROMINANCE PACK C.B.A.	
Transistor	
Q3301	B-7
Q3302	C-7
Q3304	A-6
Q3305	A-6
Q3401	C-3
Q3402	C-6
Q3403	B-3
Q3404	C-3
Q3405	B-5
Q3406	B-3
Q3407	B-5
Q3408	A-3
Q3409	A-3
Q3410	A-3
Q3411	B-6
Q3412	C-6
Q3422	A-3
Q3423	B-3
Q3424	A-3
Q3425	B-4
Q3426	C-4
Q3427	B-3
Q3501	C-1
Q3502	B-1
Q3601	E-6
Q3602	D-6
Q3603	D-6
Q3604	D-6
Transistor & Resistor	
QR3301	B-7
QR3302	A-7
QR3303	A-7
QR3304	A-8
QR3305	A-8
QR3306	B-6
QR3307	B-6
QR3308	A-7
QR3402	B-3
QR3403	A-3
QR3404	B-4
QR3405	B-5
QR3406	C-4
QR3407	C-4
QR3408	C-4
QR3409	B-4
QR3410	A-3
QR3411	A-3
QR3412	A-3
QR3415	C-5
QR3416	C-5
QR3417	C-5
QR3418	B-4
QR3501	A-2
Integrated Circuit	
IC3301	B-7
IC3401	B-3
IC3403	B-4
IC3404	B-4
IC3405	B-3
IC3501	B-2
IC3502	A-1
IC3503	C-2
IC3504	B-1
IC3601	E-6
Adjustment	
C3502	B-2
VR3301	B-6
VR3302	A-5
VR3304	A-7
VR3305	A-8
VR3307	A-5
Connector	
PP3301	C-6
PS3302	A-3
PS3303	A-6
PS3501	A-1
PS3601	C-6

ADDRESS INFORMATION

14. INPUT/OUTPUT PACK SCHEMATIC DIAGRAM

VIDEO MAIN SIGNAL PATH IN REC MODE
VIDEO MAIN SIGNAL PATH IN PLAYBACK MODE

AUDIO MAIN SIGNAL PATH IN REC MODE
AUDIO MAIN SIGNAL PATH IN PLAYBACK MODE

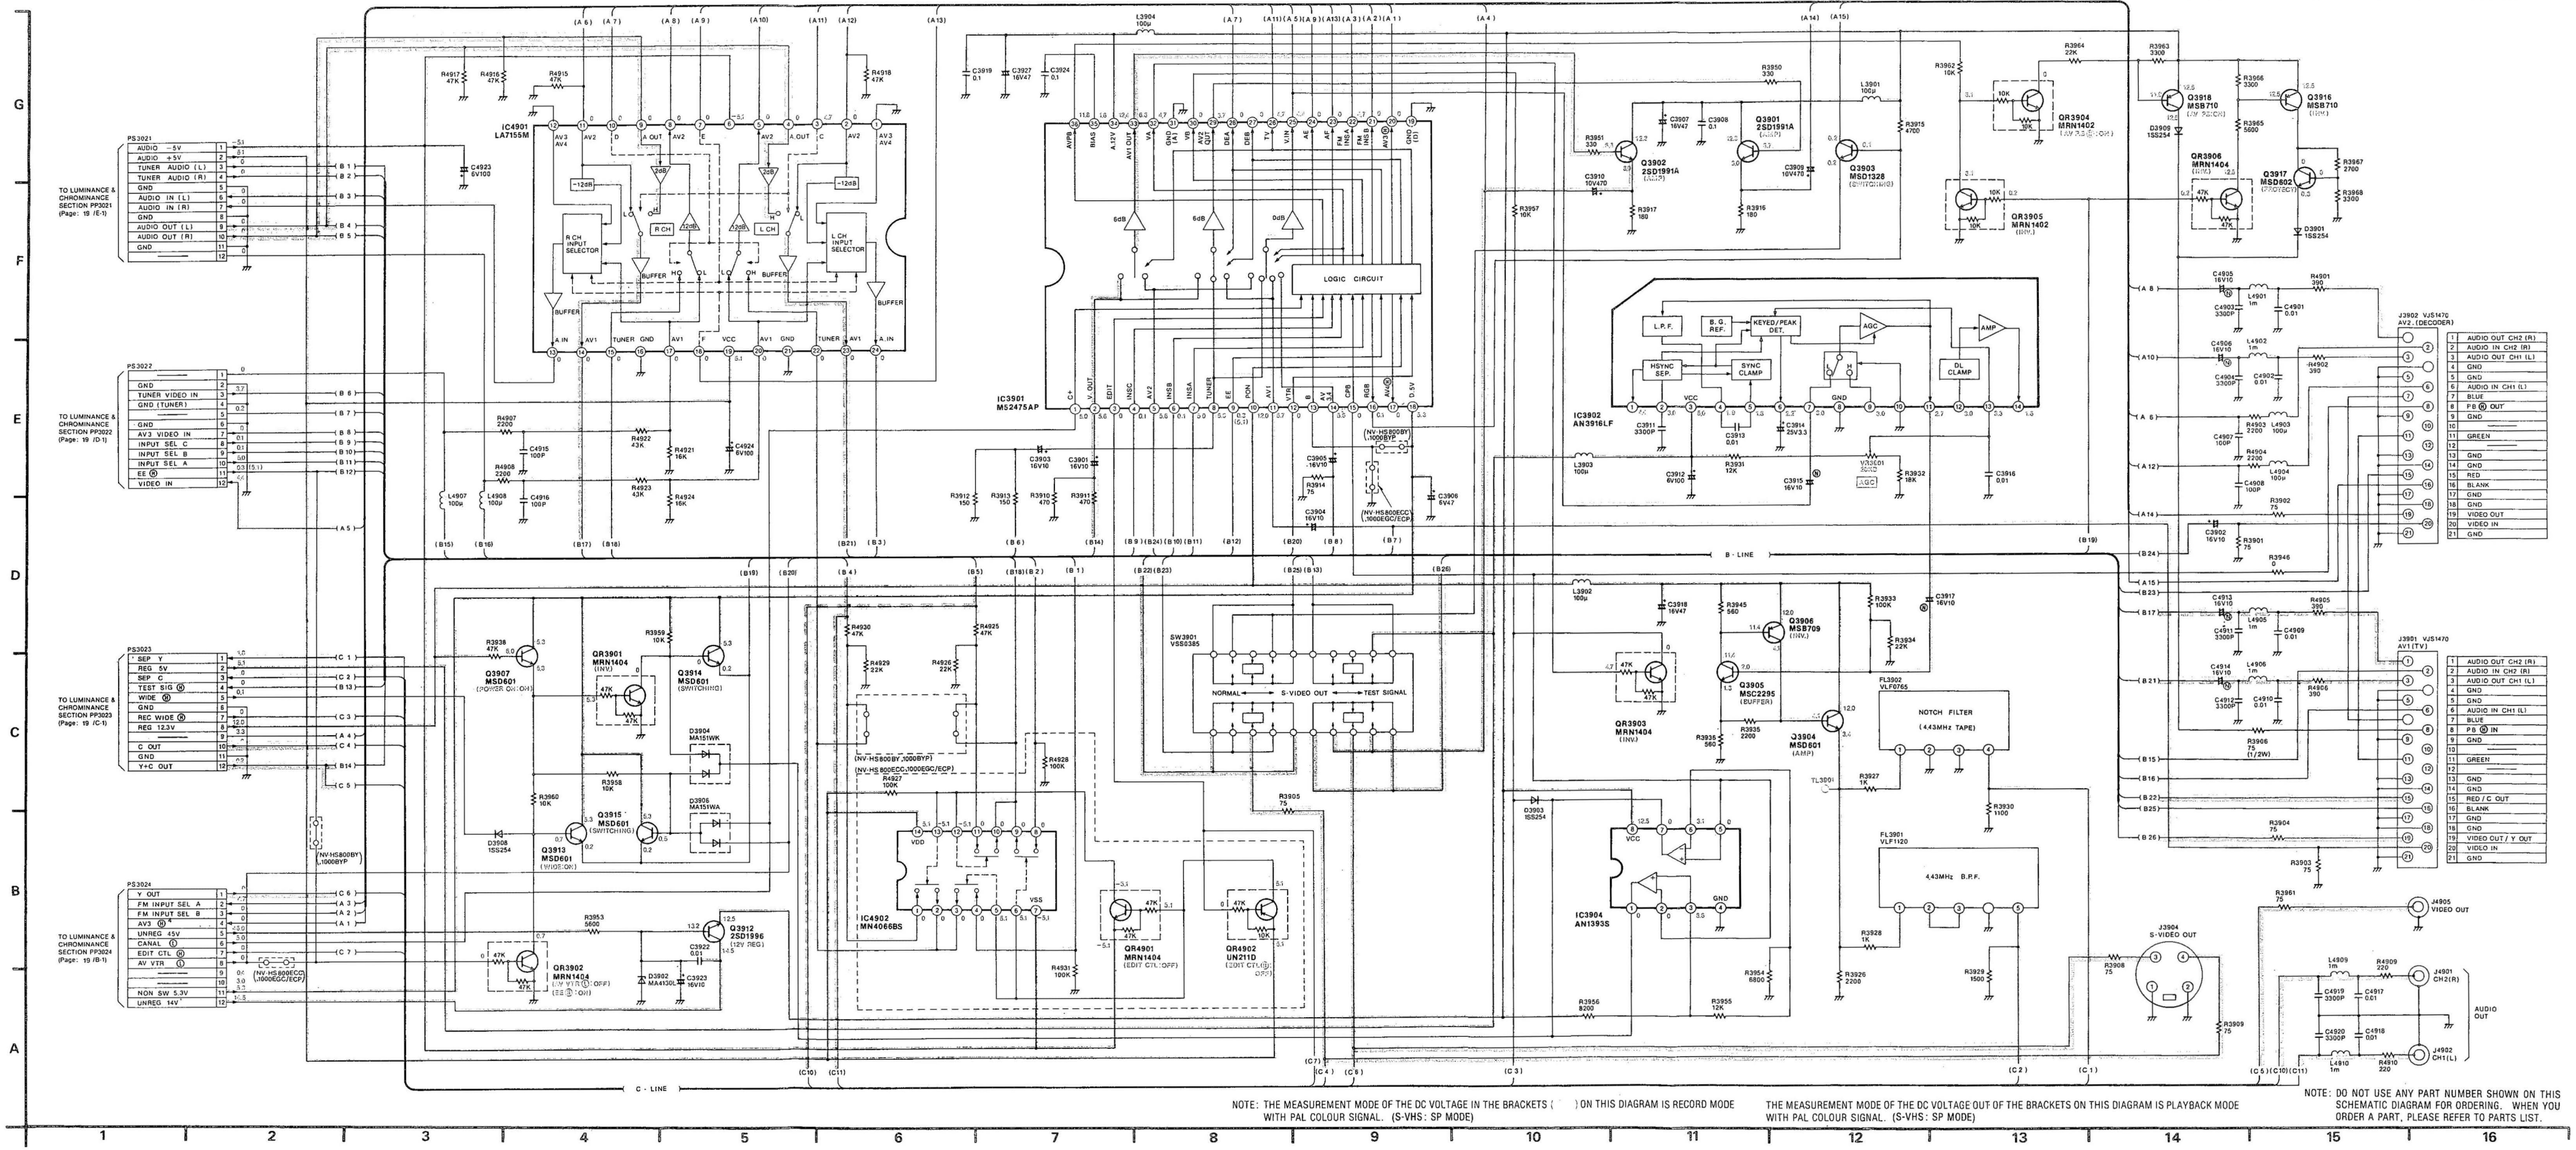
G
F
E
D
C
B
A
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
PS3021
AUDIO −5V 1
AUDIO +5V 2
TUNER AUDIO (L) 3
TUNER AUDIO (R) 4
GND 5
AUDIO IN (L) 6
AUDIO IN (R) 7
GND 8
AUDIO OUT (L) 9
AUDIO OUT (R) 10
GND 11
12
TO LUMINANCE & CHROMINANCE SECTION PP3021 (Page: 19 /E-1)
PS3022
1
GND 2
TUNER VIDEO IN 3
GND (TUNER) 4
5
GND 6
AV3 VIDEO IN 7
INPUT SEL C 8
INPUT SEL B 9
INPUT SEL A 10
EE Ⓗ 11
VIDEO IN 12
TO LUMINANCE & CHROMINANCE SECTION PP3022 (Page: 19 /D-1)
PS3023
SEP Y 1
REG 5V 2
SEP C 3
TEST SIG Ⓗ 4
WIDE Ⓗ 5
GND 6
REC WIDE Ⓗ 7
REG 12.3V 8
9
C OUT 10
GND 11
Y+C OUT 12
TO LUMINANCE & CHROMINANCE SECTION PP3023 (Page: 19 /C-1)
PS3024
Y OUT 1
FM INPUT SEL A 2
FM INPUT SEL B 3
AV3 Ⓗ 4
UNREG 45V 5
CANAL Ⓛ 6
EDIT CTL Ⓗ 7
AV VTR Ⓛ 8
9
10
NON SW 5.3V 11
UNREG 14V 12
TO LUMINANCE & CHROMINANCE SECTION PP3024 (Page: 19 /B-1)
(NV-HS800ECC, 1000EGC/ECP)
(NV-HS800BY, 1000BYP)
IC4901 LA7155M
R CH INPUT SELECTOR
L CH INPUT SELECTOR
BUFFER
−12dB
20dB
R CH
L CH
IC3901 MS2475AP
LOGIC CIRCUIT
6dB
0dB
IC3902 AN3916LF
L.P.F.
B.G. REF.
KEYED/PEAK DET.
AGC
AMP
HSYNC SEP.
SYNC CLAMP
DL CLAMP
Q3901 2SD1991A
Q3902 2SD1991A
Q3903 MSD1328 (SWITCHING)
Q3904 MRN1402
Q3905 MRN1402
Q3916 MSB710
Q3918 MSB710
QR3906 MRN1404
Q3917 MSD602
D3909 1SS254
D3901 1SS254
J3902 VJS1470 AV2.(DECODER)
J3901 VJS1470 AV1(TV)
B - LINE
C - LINE
Q3907 MSD601 (POWER ON:OH)
QR3901 MRN1404 (INV)
Q3914 MSD601 (SWITCHING)
D3904 MA151WK
D3906 MA151WA
Q3915 MSD601 (SWITCHING)
Q3913 MSD601 (WIDE:OH)
D3908 1SS254
QR3902 MRN1404
Q3912 2SD1996 (12V REG)
D3902 MA4130L
IC4902 MN4066BS
QR4901 MRN1404 (EDIT CTL:OFF)
QR4902 UN211D
SW3901 VSS0385
NORMAL
S-VIDEO OUT
TEST SIGNAL
Q3906 MSB709 (INV)
QR3903 MRN1404 (INV)
Q3905 MSC2295 (BUFFER)
Q3904 MSD601 (AMP)
FL3902 VLF0765
NOTCH FILTER (4.43MHz TAPE)
FL3901 VLF1120
4.43MHz B.P.F.
IC3904 AN1393S
D3903 1SS254
TL3901
J3904 S-VIDEO OUT
J4905 VIDEO OUT
J4901 CH2(R)
J4902 CH1(L)
AUDIO OUT

	J3902 VJS1470 AV2.(DECODER)
1	AUDIO OUT CH2 (R)
2	AUDIO IN CH2 (R)
3	AUDIO OUT CH1 (L)
4	GND
5	GND
6	AUDIO IN CH1 (L)
7	BLUE
8	PB Ⓗ OUT
9	GND
10	———
11	GREEN
12	———
13	GND
14	GND
15	RED
16	BLANK
17	GND
18	GND
19	VIDEO OUT
20	VIDEO IN
21	GND

	J3901 VJS1470 AV1(TV)
1	AUDIO OUT CH2 (R)
2	AUDIO IN CH2 (R)
3	AUDIO OUT CH1 (L)
4	GND
5	GND
6	AUDIO IN CH1 (L)
7	BLUE
8	PB Ⓗ IN
9	GND
10	———
11	GREEN
12	———
13	GND
14	GND
15	RED / C OUT
16	BLANK
17	GND
18	GND
19	VIDEO OUT / Y OUT
20	VIDEO IN
21	GND

NOTE: THE MEASUREMENT MODE OF THE DC VOLTAGE IN THE BRACKETS ( ) ON THIS DIAGRAM IS RECORD MODE WITH PAL COLOUR SIGNAL. (S-VHS: SP MODE)

THE MEASUREMENT MODE OF THE DC VOLTAGE OUT OF THE BRACKETS ON THIS DIAGRAM IS PLAYBACK MODE WITH PAL COLOUR SIGNAL. (S-VHS: SP MODE)

NOTE: DO NOT USE ANY PART NUMBER SHOWN ON THIS SCHEMATIC DIAGRAM FOR ORDERING. WHEN YOU ORDER A PART, PLEASE REFER TO PARTS LIST.

15 INPUT/OUTPUT PACK C.B.A. (VEP03A72E: NV-HS1000EGC/ECP, 800ECC) (VEP03A72G: NV-HS1000BYP, 800BY)

INPUT/OUTPUT PACK C.B.A.					
Transistor		**Transistor & Resistor**		**Adjustment**	
Q3901	C-6	QR3901	C-5	VR3901	C-5
Q3902	C-7	QR3902	C-5	**Connector**	
Q3903	B-3	QR3903	B-7	PS3021	A-1
Q3904	C-6	QR3904	C-4	PS3022	A-3
Q3905	D-6	QR3905	C-4	PS3023	A-5
Q3906	D-6	QR3906	C-4	PS3024	A-6
Q3907	C-5	QR4901	A-1		
Q3912	B-7	QR4902	B-1		
Q3913	C-5	**Integrated Circuit**			
Q3914	C-4	IC3901	B-6		
Q3915	C-4	IC3902	D-5		
Q3916	C-4	IC3904	D-4		
Q3917	C-3	IC4901	C-1		
Q3918	C-4	IC4902	B-1		

ADDRESS INFORMATION

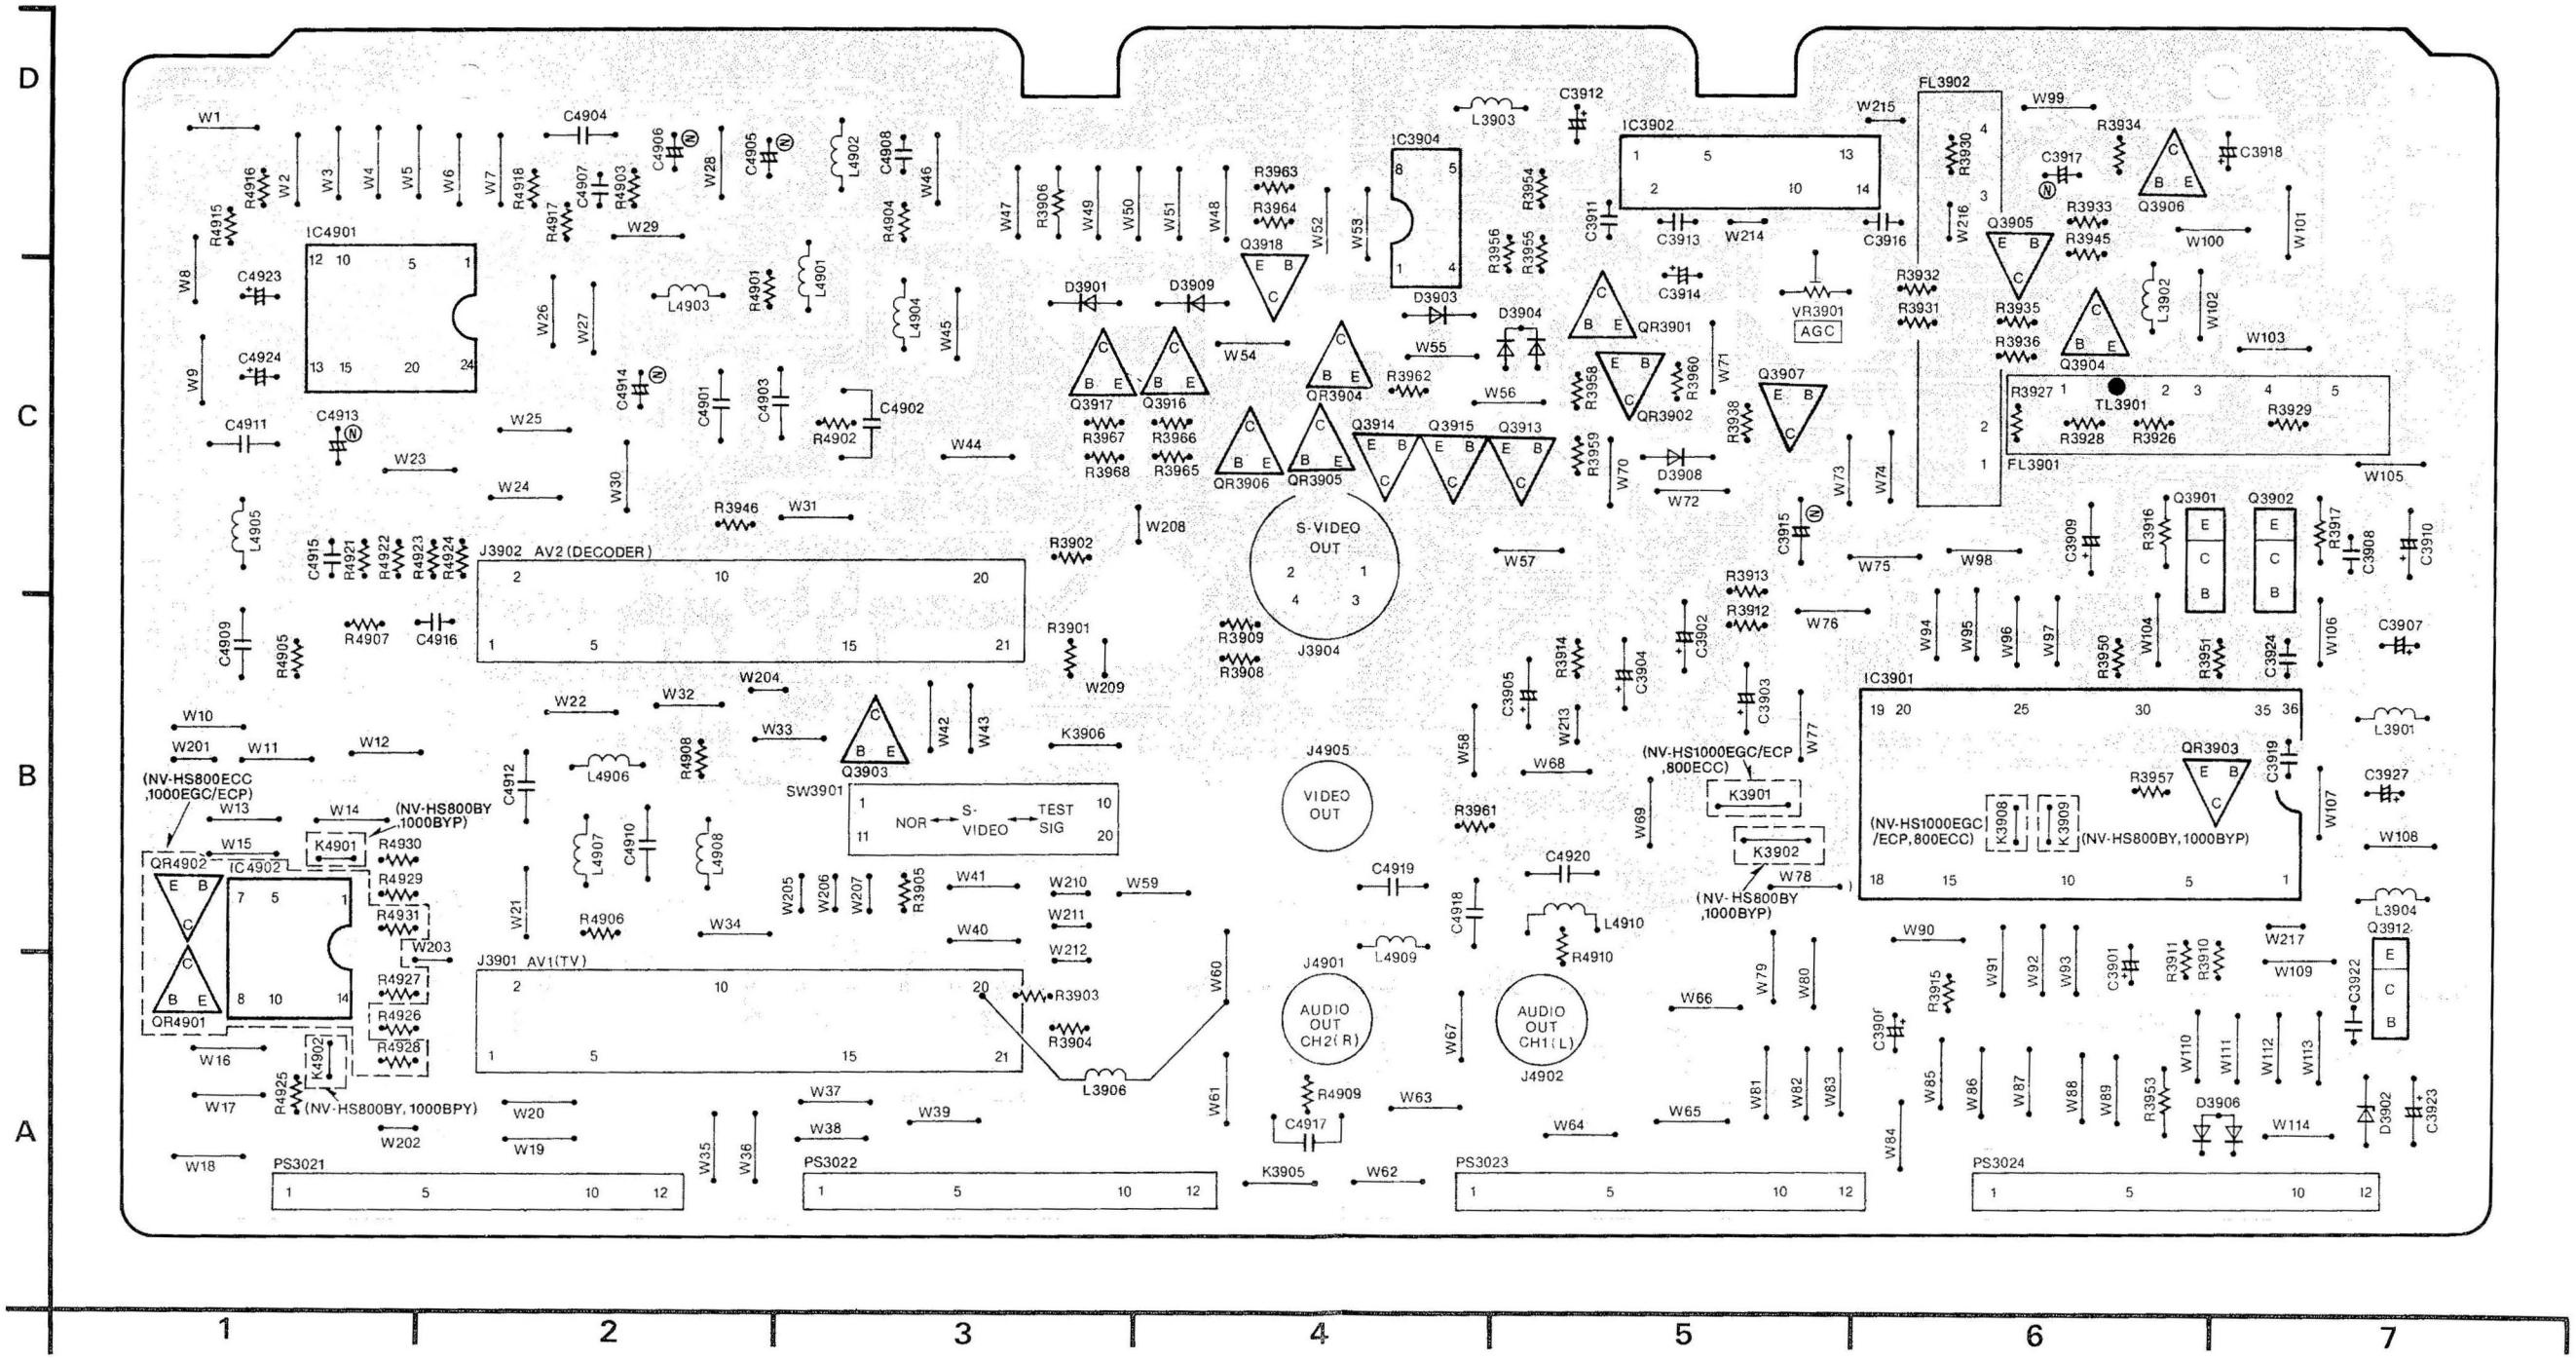
D
C
B
A
1
2
3
4
5
6
7
IC4901
IC4902
IC3901
IC3902
IC3904
J3902 AV2 (DECODER)
J3901 AV1 (TV)
J3904
S-VIDEO OUT
J4905
VIDEO OUT
J4901
AUDIO OUT CH2 (R)
J4902
AUDIO OUT CH1 (L)
SW3901
NOR
S-VIDEO
TEST SIG
FL3902
FL3901
TL3901
VR3901
AGC
QR4901
QR4902
QR3901
QR3902
QR3903
QR3904
QR3905
QR3906
Q3901
Q3902
Q3903
Q3904
Q3905
Q3906
Q3907
Q3912
Q3913
Q3914
Q3915
Q3916
Q3917
Q3918
K4901
K4902
K3901
K3902
K3905
K3906
(NV-HS800ECC ,1000EGC/ECP)
(NV-HS800BY ,1000BYP)
(NV-HS800BY, 1000BPY)
(NV-HS1000EGC/ECP ,800ECC)
(NV-HS1000EGC /ECP, 800ECC)
(NV-HS800BY, 1000BYP)
(NV- HS800BY ,1000BYP)
PS3021
PS3022
PS3023
PS3024
L3901
L3902
L3903
L3904
L3906
L4901
L4902
L4903
L4904
L4905
L4906
L4907
L4908
L4909
L4910
D3901
D3902
D3903
D3904
D3906
D3908
D3909

16. HEAD AMP C.B.A. (VEP05176L)

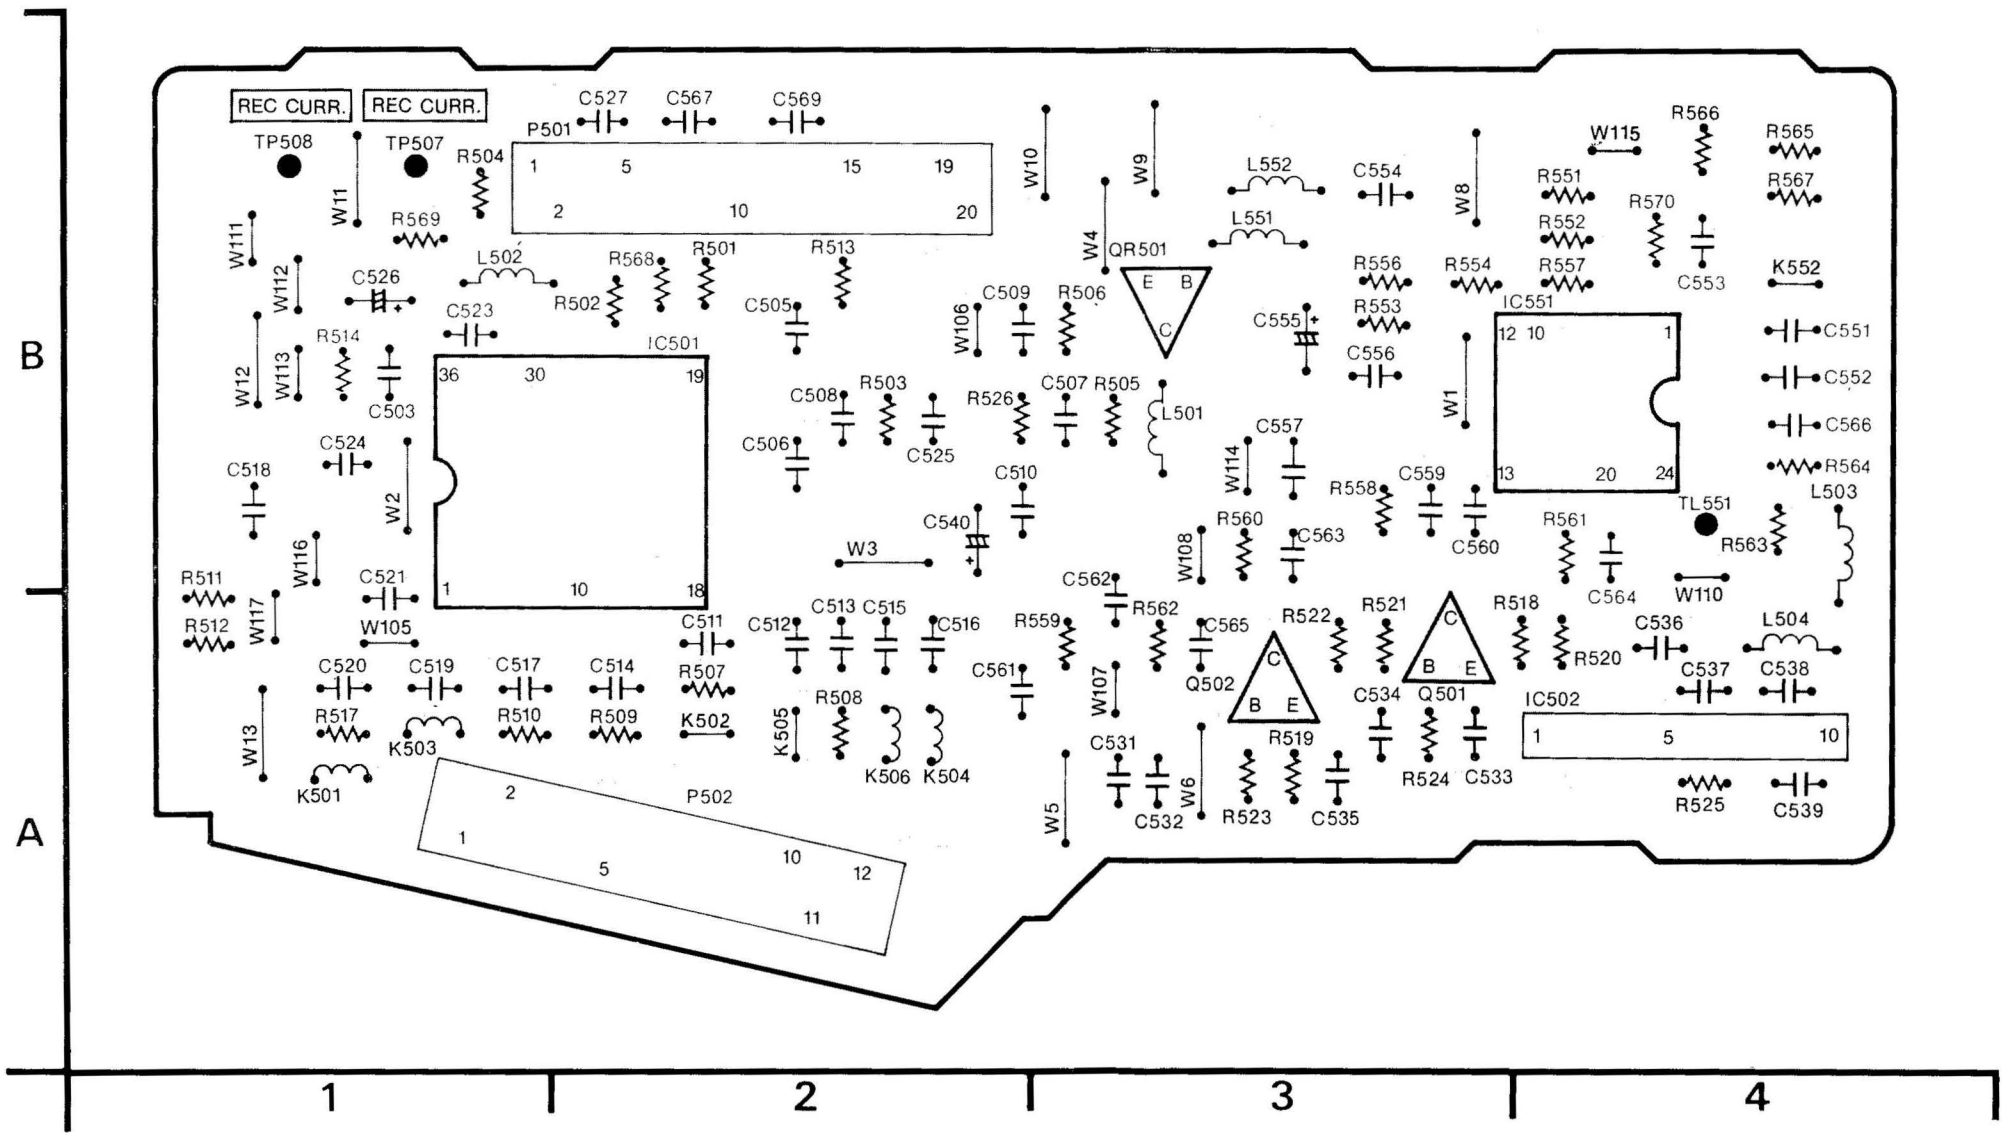
REC CURR.
TP508
REC CURR.
TP507
R504
P501
C527
C567
C569
1
5
15
19
2
10
20
W11
R569
W111
W112
C526
L502
R568
R501
R513
R502
C523
C505
W10
W9
W4
QR501
E
B
C
L552
L551
C554
W8
W115
R566
R565
R567
R551
R552
R570
R557
R556
R554
C553
K552
R553
C555
IC551
12
10
1
C556
C551
C552
C566
R564
L503
W1
13
20
24
TL551
R563
C509
R506
W106
IC501
36
30
19
W12
W113
R514
C503
C524
C518
W2
C508
R503
R526
C507
R505
L501
C506
C525
C510
W114
C557
R558
C559
C560
R561
C564
W110
C540
W3
W116
R511
R512
W117
C521
W105
1
10
18
C511
C512
C513
C515
C516
R559
C562
R562
C565
R560
C563
W108
R522
R521
R518
R520
C536
L504
C520
C519
C517
C514
R507
C561
W107
Q502
Q501
C534
C537
C538
R517
R510
R509
K502
R508
K505
K506
K504
R519
C531
C532
W6
R523
C535
R524
C533
IC502
1
5
10
W13
K501
K503
W5
R525
C539
P502
2
1
5
10
12
11
B
A
1
2
3
4

HEAD AMP C.B.A.	
Transistor	
Q501 Q502	A-3 A-3
Transistor & Resistor	
QR501	B-3
Integrated Circuit	
IC501 IC502 IC551	B-1 A-4 B-4
Test Point	
TL551 TP507 TP508	B-4 B-1 B-1
Connector	
P501 P502	B-2 A-1

ADDRESS INFORMATION

17 HEAD AMP SCHEMATIC DIAGRAM

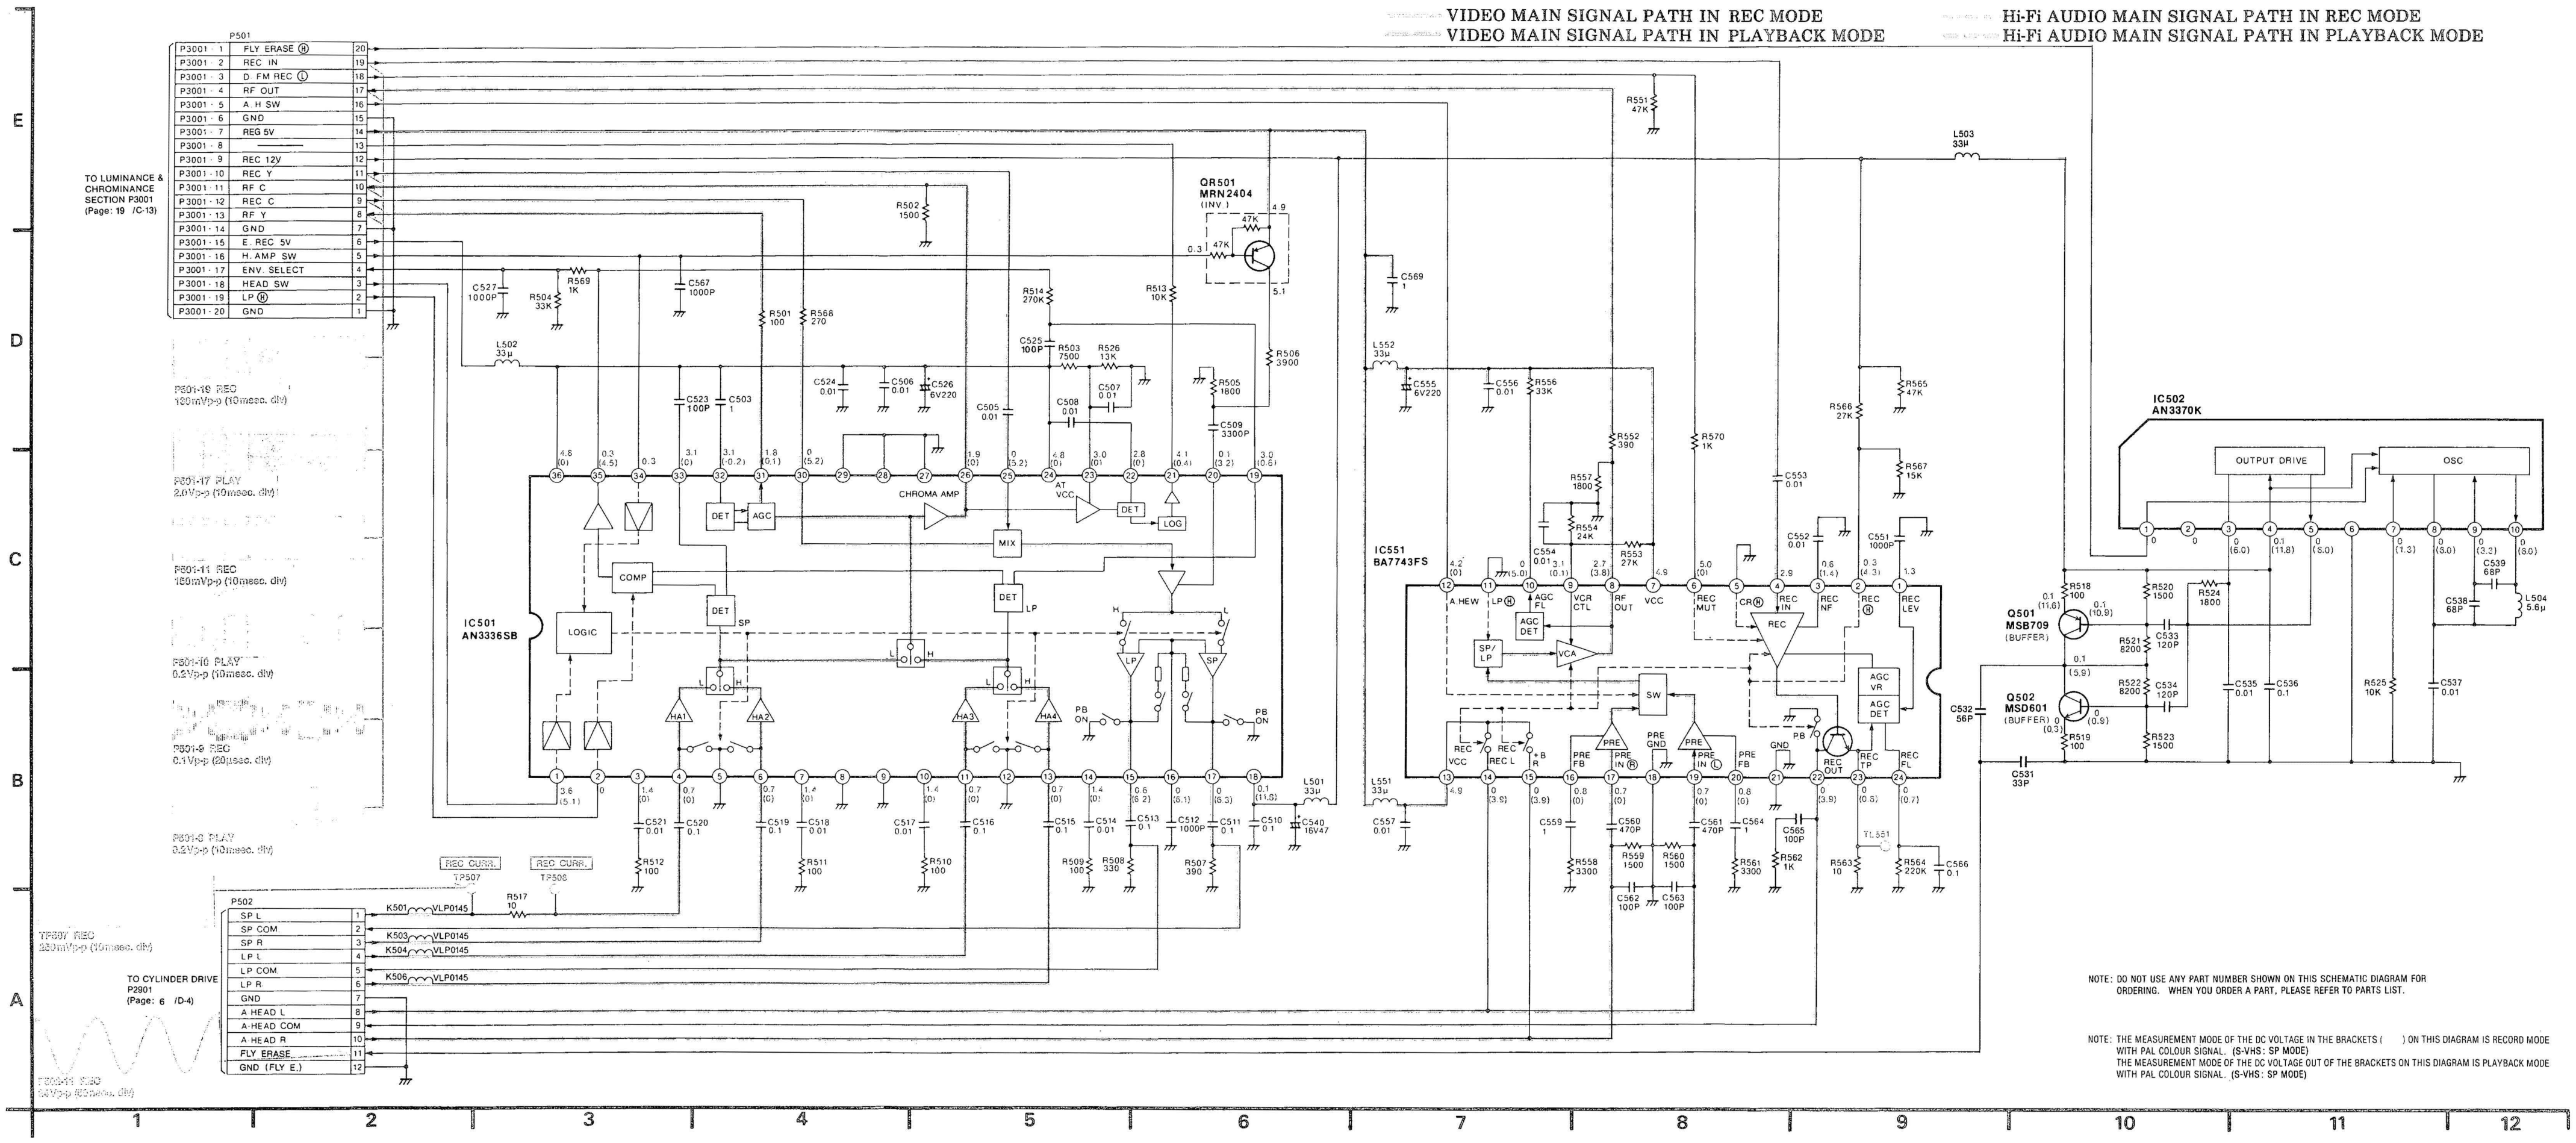
VIDEO MAIN SIGNAL PATH IN REC MODE
VIDEO MAIN SIGNAL PATH IN PLAYBACK MODE
Hi-Fi AUDIO MAIN SIGNAL PATH IN REC MODE
Hi-Fi AUDIO MAIN SIGNAL PATH IN PLAYBACK MODE
P501
P3001 · 1 FLY ERASE Ⓗ 20
P3001 · 2 REC IN 19
P3001 · 3 D. FM REC Ⓛ 18
P3001 · 4 RF OUT 17
P3001 · 5 A. H SW 16
P3001 · 6 GND 15
P3001 · 7 REG 5V 14
P3001 · 8 13
P3001 · 9 REC 12V 12
P3001 · 10 REC Y 11
P3001 · 11 RF C 10
P3001 · 12 REC C 9
P3001 · 13 RF Y 8
P3001 · 14 GND 7
P3001 · 15 E. REC 5V 6
P3001 · 16 H. AMP SW 5
P3001 · 17 ENV. SELECT 4
P3001 · 18 HEAD SW 3
P3001 · 19 LP Ⓗ 2
P3001 · 20 GND 1
TO LUMINANCE & CHROMINANCE SECTION P3001 (Page: 19 /C-13)
P501-19 REC 180mVp-p (10msec. div)
P501-17 PLAY 2.0Vp-p (10msec. div)
P501-11 REC 180mVp-p (10msec. div)
P501-10 PLAY 0.2Vp-p (10msec. div)
P501-9 REC 0.1Vp-p (20μsec. div)
P501-8 PLAY 0.2Vp-p (10msec. div)
TP507 REC 250mVp-p (10msec. div)
P502-11 REC 24Vp-p (50nsec. div)
P502
SP L 1
SP COM. 2
SP R 3
LP L 4
LP COM. 5
LP R 6
GND 7
A·HEAD L 8
A·HEAD COM 9
A·HEAD R 10
FLY ERASE 11
GND (FLY E.) 12
TO CYLINDER DRIVE P2901 (Page: 6 /D-4)
K501 VLP0145
K503 VLP0145
K504 VLP0145
K506 VLP0145
R517 10
REC CURR. TP507
REC CURR. TP508
IC501 AN3336SB
CHROMA AMP
COMP
LOGIC
DET
AGC
MIX
LOG
AT VCC
SP
LP
HA1
HA2
HA3
HA4
PB ON
QR501 MRN2404 (INV.)
47K
R502 1500
R504 33K
R569 1K
C527 1000P
C567 1000P
R501 100
R568 270
R514 270K
R513 10K
R506 3900
L502 33μ
C523 100P
C503 1
C524 0.01
C506 0.01
C526 6V220
C505 0.01
C525 100P
R503 7500
R526 13K
C508 0.01
C507 0.01
R505 1800
C509 3300P
C521 0.01
C520 0.1
C519 0.1
C518 0.01
C517 0.01
C516 0.1
C515 0.1
C514 0.01
C513 0.1
C512 1000P
C511 0.1
C510 0.1
C540 16V47
L501 33μ
R512 100
R511 100
R510 100
R509 100
R508 330
R507 390
IC551 BA7743FS
A.HEW
LP Ⓗ
AGC FL
VCR CTL
RF OUT
VCC
REC MUT
CR Ⓗ
REC IN
REC NF
REC Ⓡ
REC LEV
SP/LP
AGC DET
VCA
SW
REC
AGC VR
AGC DET
REC VCC
REC L
+B
PRE FB
PRE IN Ⓡ
PRE GND
PRE IN Ⓛ
PRE FB
GND
REC OUT
REC TP
REC FL
PB
R551 47K
L552 33μ
C569 1
C555 6V220
C556 0.01
R556 33K
R552 390
R557 1800
R554 24K
C554 0.01
R553 27K
R570 1K
C553 0.01
C552 0.01
C551 1000P
R566 27K
R565 47K
R567 15K
L551 33μ
C557 0.01
C559 1
C560 470P
C561 470P
C564 1
C565 100P
R558 3300
R559 1500
R560 1500
C562 100P
C563 100P
R561 3300
R562 1K
R563 10
TL551
R564 220K
C566 0.1
L503 33μ
C532 56P
C531 33P
Q501 MSB709 (BUFFER)
Q502 MSD601 (BUFFER)
R518 100
R519 100
IC502 AN3370K
OUTPUT DRIVE
OSC
R520 1500
R524 1800
R521 8200
C533 120P
R522 8200
C534 120P
R523 1500
C535 0.01
C536 0.1
R525 10K
C537 0.01
C538 68P
C539 68P
L504 5.6μ
A
B
C
D
E
1
2
3
4
5
6
7
8
9
10
11
12

NOTE: DO NOT USE ANY PART NUMBER SHOWN ON THIS SCHEMATIC DIAGRAM FOR ORDERING. WHEN YOU ORDER A PART, PLEASE REFER TO PARTS LIST.

NOTE: THE MEASUREMENT MODE OF THE DC VOLTAGE IN THE BRACKETS ( ) ON THIS DIAGRAM IS RECORD MODE WITH PAL COLOUR SIGNAL. (S-VHS: SP MODE)
THE MEASUREMENT MODE OF THE DC VOLTAGE OUT OF THE BRACKETS ON THIS DIAGRAM IS PLAYBACK MODE WITH PAL COLOUR SIGNAL. (S-VHS: SP MODE)

18 Hi-Fi AUDIO PACK SCHEMATIC DIAGRAM

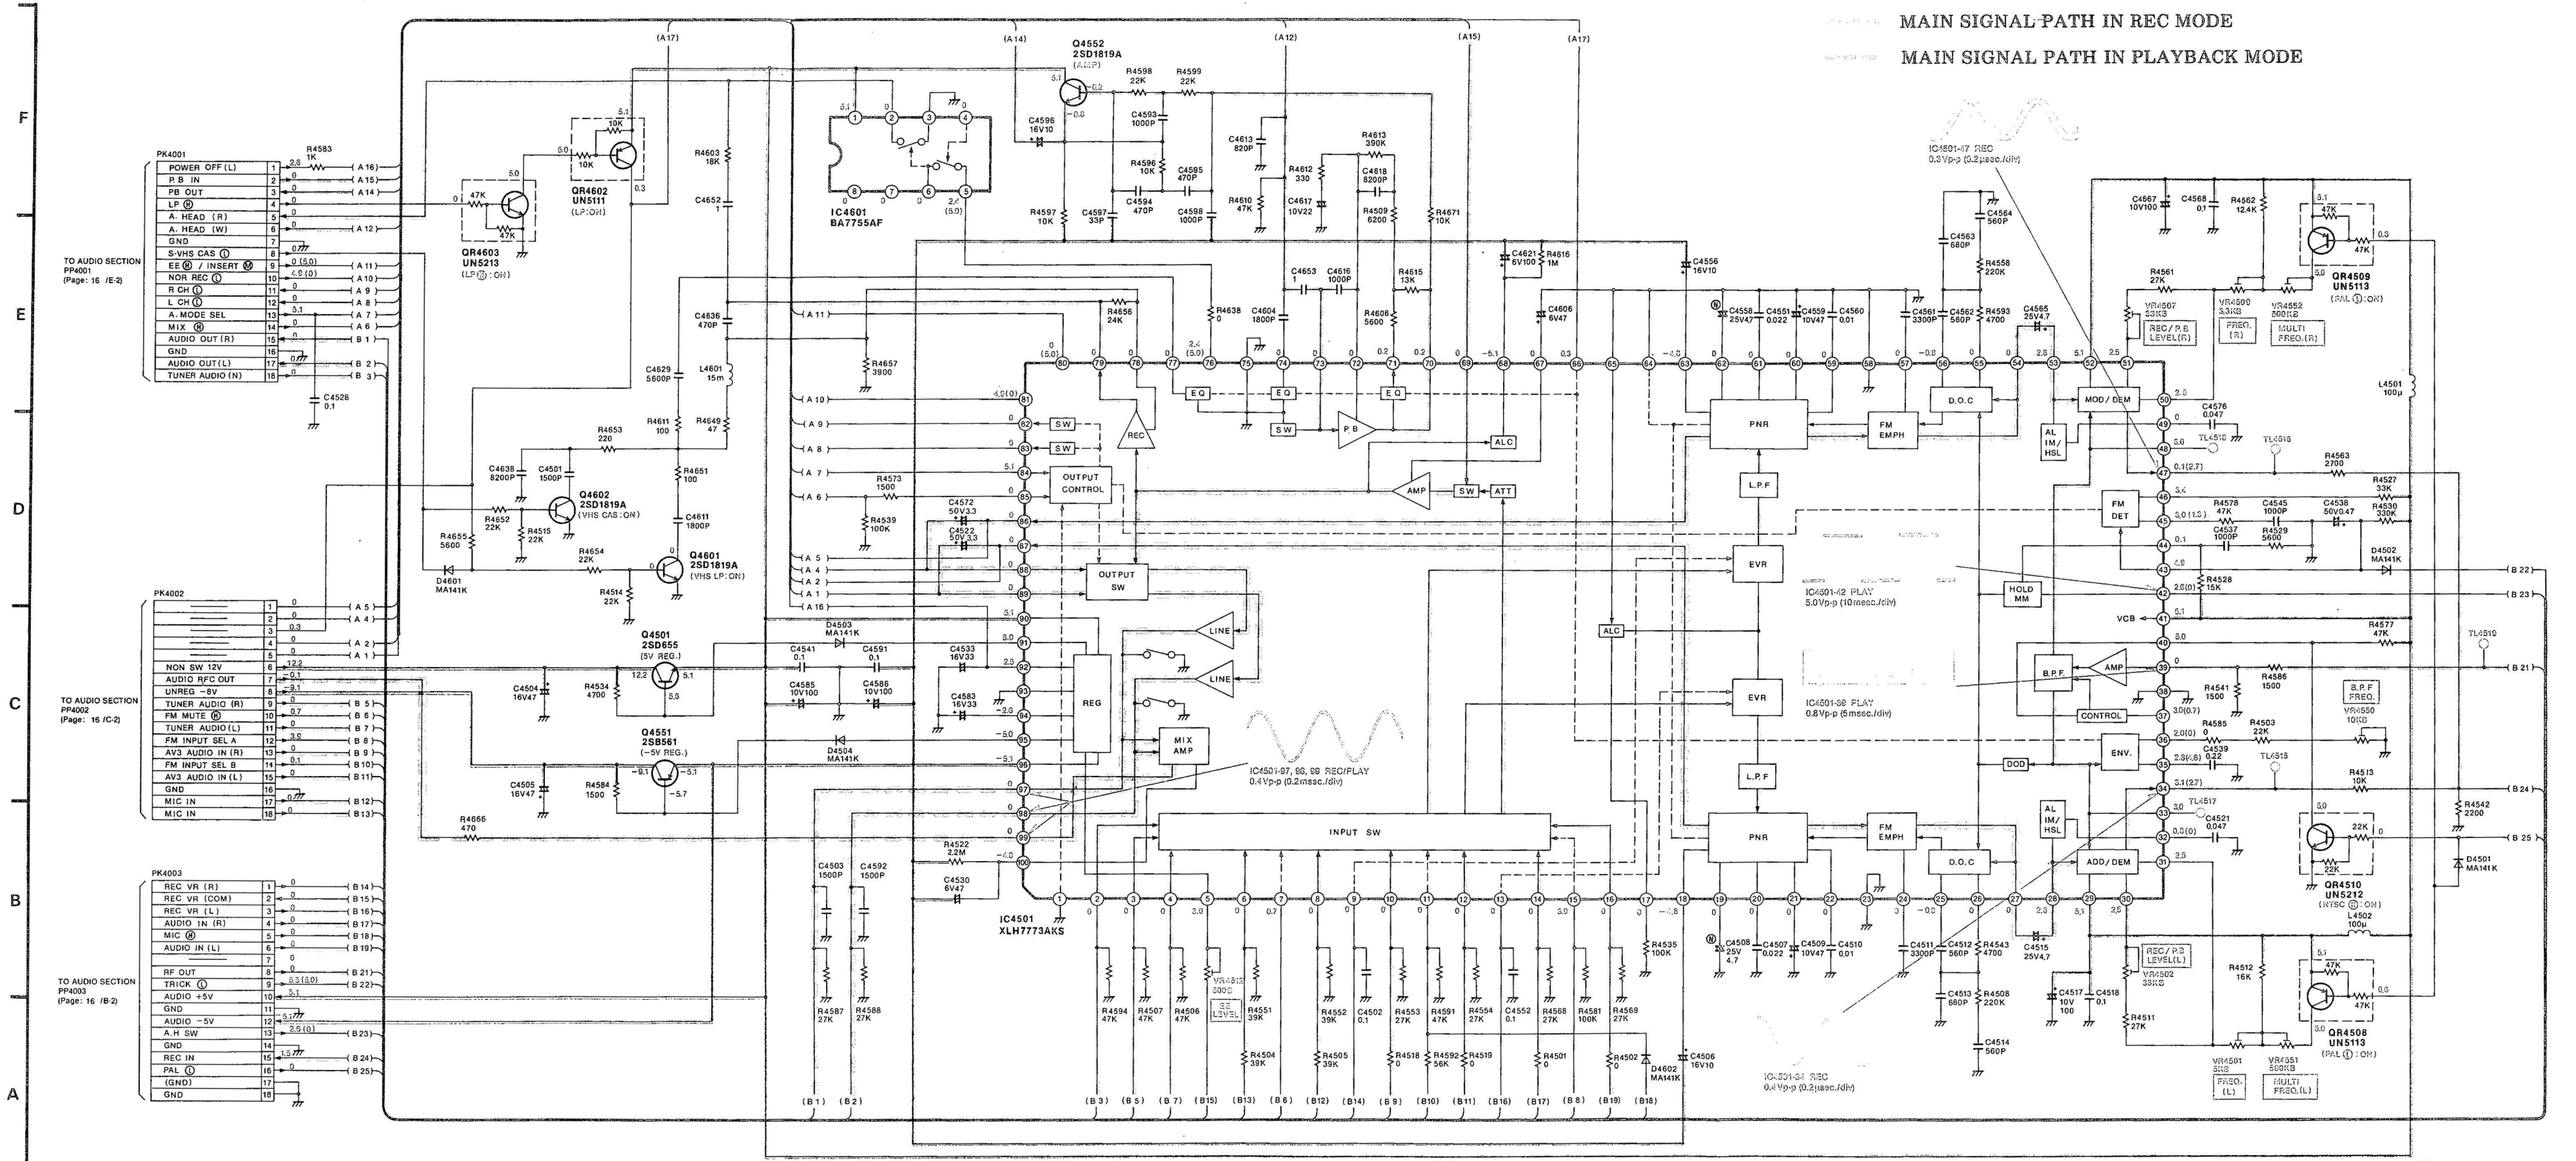
MAIN SIGNAL PATH IN REC MODE
MAIN SIGNAL PATH IN PLAYBACK MODE
F
E
D
C
B
A
TO AUDIO SECTION PP4001 (Page: 16 /E-2)
PK4001
POWER OFF (L) 1
P.B IN 2
PB OUT 3
LP Ⓗ 4
A. HEAD (R) 5
A. HEAD (W) 6
GND 7
S-VHS CAS Ⓛ 8
EE Ⓗ / INSERT Ⓜ 9
NOR REC Ⓛ 10
R CH Ⓛ 11
L CH Ⓛ 12
A. MODE SEL 13
MIX Ⓗ 14
AUDIO OUT (R) 15
GND 16
AUDIO OUT (L) 17
TUNER AUDIO (N) 18
R4583 1K
C4528 0.1
TO AUDIO SECTION PP4002 (Page: 16 /C-2)
PK4002
NON SW 12V 6
AUDIO RFC OUT 7
UNREG −8V 8
TUNER AUDIO (R) 9
FM MUTE Ⓗ 10
TUNER AUDIO (L) 11
FM INPUT SEL A 12
AV3 AUDIO IN (R) 13
FM INPUT SEL B 14
AV3 AUDIO IN (L) 15
GND 16
MIC IN 17
MIC IN 18
TO AUDIO SECTION PP4003 (Page: 16 /B-2)
PK4003
REC VR (R) 1
REC VR (COM) 2
REC VR (L) 3
AUDIO IN (R) 4
MIC Ⓗ 5
AUDIO IN (L) 6
RF OUT 8
TRICK Ⓛ 9
AUDIO +5V 10
GND 11
AUDIO −5V 12
A.H SW 13
GND 14
REC IN 15
PAL Ⓛ 16
(GND) 17
GND 18
QR4603 UN5213 (LP Ⓗ : ON)
QR4602 UN5111 (LP : ON)
Q4602 2SD1819A (VHS CAS : ON)
Q4601 2SD1819A (VHS LP : ON)
D4601 MA141K
Q4501 2SD655 (5V REG.)
Q4551 2SB561 (−5V REG.)
IC4601 BA7755AF
Q4552 2SD1819A (AMP)
IC4501 XLH7773AKS
D4503 MA141K
D4504 MA141K
D4602 MA141K
OUTPUT CONTROL
OUTPUT SW
REC
EQ
SW
P.B
ALC
AMP
ATT
LINE
REG
MIX AMP
INPUT SW
PNR
FM EMPH
L.P.F
EVR
D.O.C
MOD / DEM
AL IM/ HSL
FM DET
HOLD MM
B.P.F.
CONTROL
ENV.
DOD
ADD / DEM
VCB
IC4501-47 REC 0.3Vp-p (0.2μsec./div)
IC4501-42 PLAY 5.0Vp-p (10msec./div)
IC4501-39 PLAY 0.8Vp-p (5msec./div)
IC4501-97, 98, 99 REC/PLAY 0.4Vp-p (0.2msec./div)
IC4501-34 REC 0.4Vp-p (0.2μsec./div)
QR4509 UN5113 (PAL Ⓛ : ON)
QR4510 UN5212 (NTSC Ⓗ : ON)
QR4508 UN5113 (PAL Ⓛ : ON)
REC / P.B LEVEL (R)
FREQ. (R)
MULTI FREQ. (R)
REC / P.B LEVEL (L)
FREQ. (L)
MULTI FREQ. (L)
B.P.F FREQ.
D4501 MA141K
D4502 MA141K
L4501 100μ
L4502 100μ
TL4510
TL4515
TL4516
TL4517

NOTE: THE MEASUREMENT MODE OF THE DC VOLTAGE IN THE BRACKETS ( ) ON THIS DIAGRAM IS RECORD MODE WITH PAL COLOUR SIGNAL. **(S-VHS: SP MODE)**

THE MEASUREMENT MODE OF THE DC VOLTAGE OUT OF THE BRACKETS ON THIS DIAGRAM IS PLAYBACK MODE WITH PAL COLOUR SIGNAL. **(S-VHS: SP MODE)**

∘ LINE IN SIGNAL LEVEL… −10dB 1kHz'

NOTE: DO NOT USE ANY PART NUMBER SHOWN ON THIS SCHEMATIC DIAGRAM FOR ORDERING. WHEN YOU ORDER A PART, PLEASE REFER TO PARTS LIST.

1 2 3 4 5 6 7 8 9 10 11 12 13

19. Hi-Fi AUDIO PACK C.B.A. (VEP04447PS)

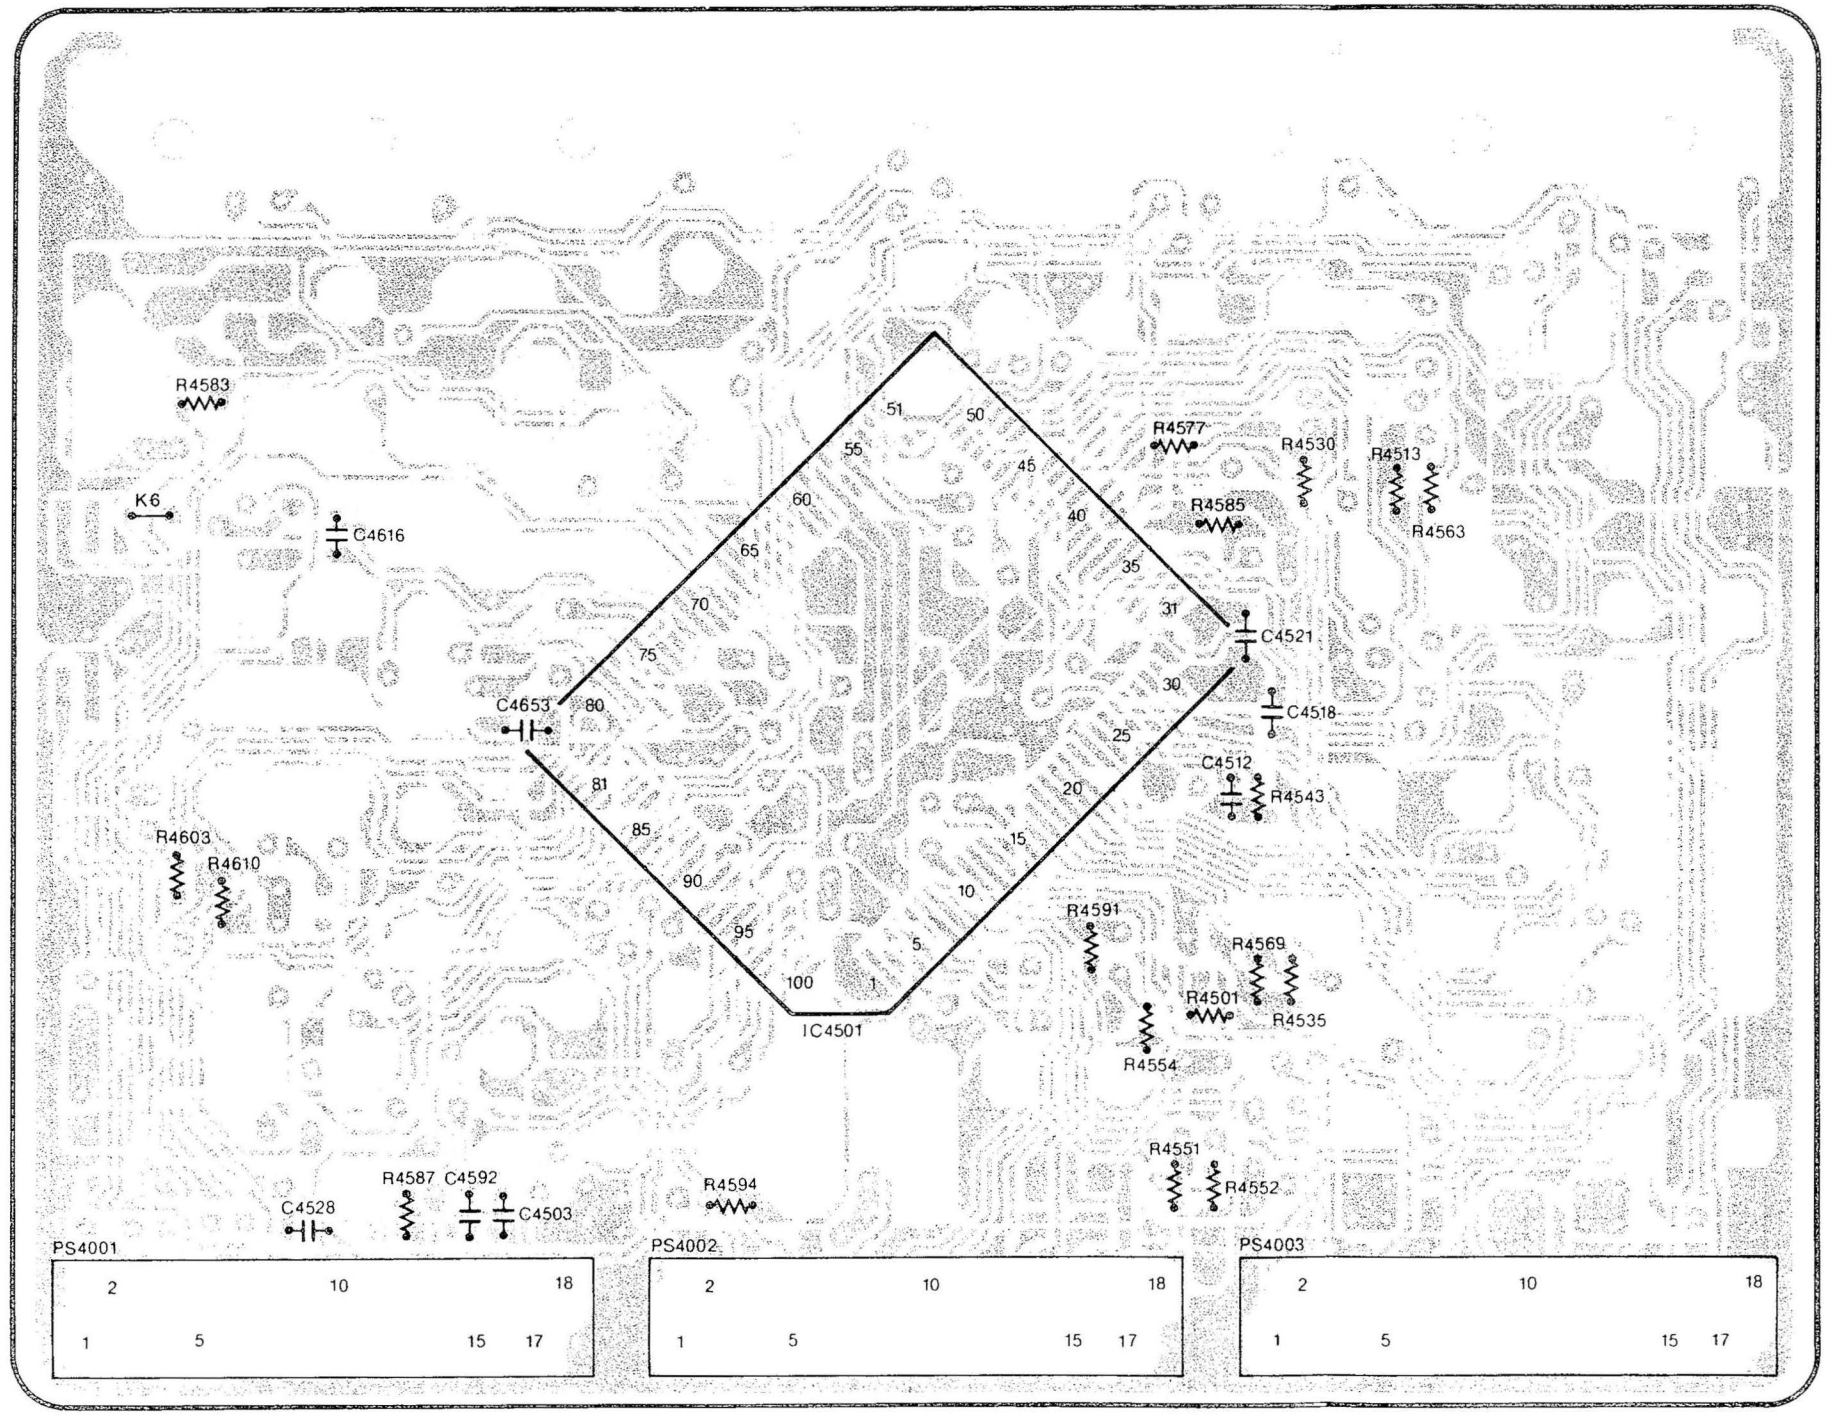
D
C
B
A
1
2
3
4
R4583
K6
C4616
IC4501
1
5
10
15
20
25
30
31
35
40
45
50
51
55
60
65
70
75
80
81
85
90
95
100
R4577
R4530
R4513
R4585
R4563
C4521
C4518
C4512
R4543
C4653
R4603
R4610
R4591
R4569
R4501
R4535
R4554
R4551
R4552
R4594
R4587
C4592
C4503
C4528
PS4001
PS4002
PS4003
2
10
18
1
5
15
17

(COMPONENT SIDE)

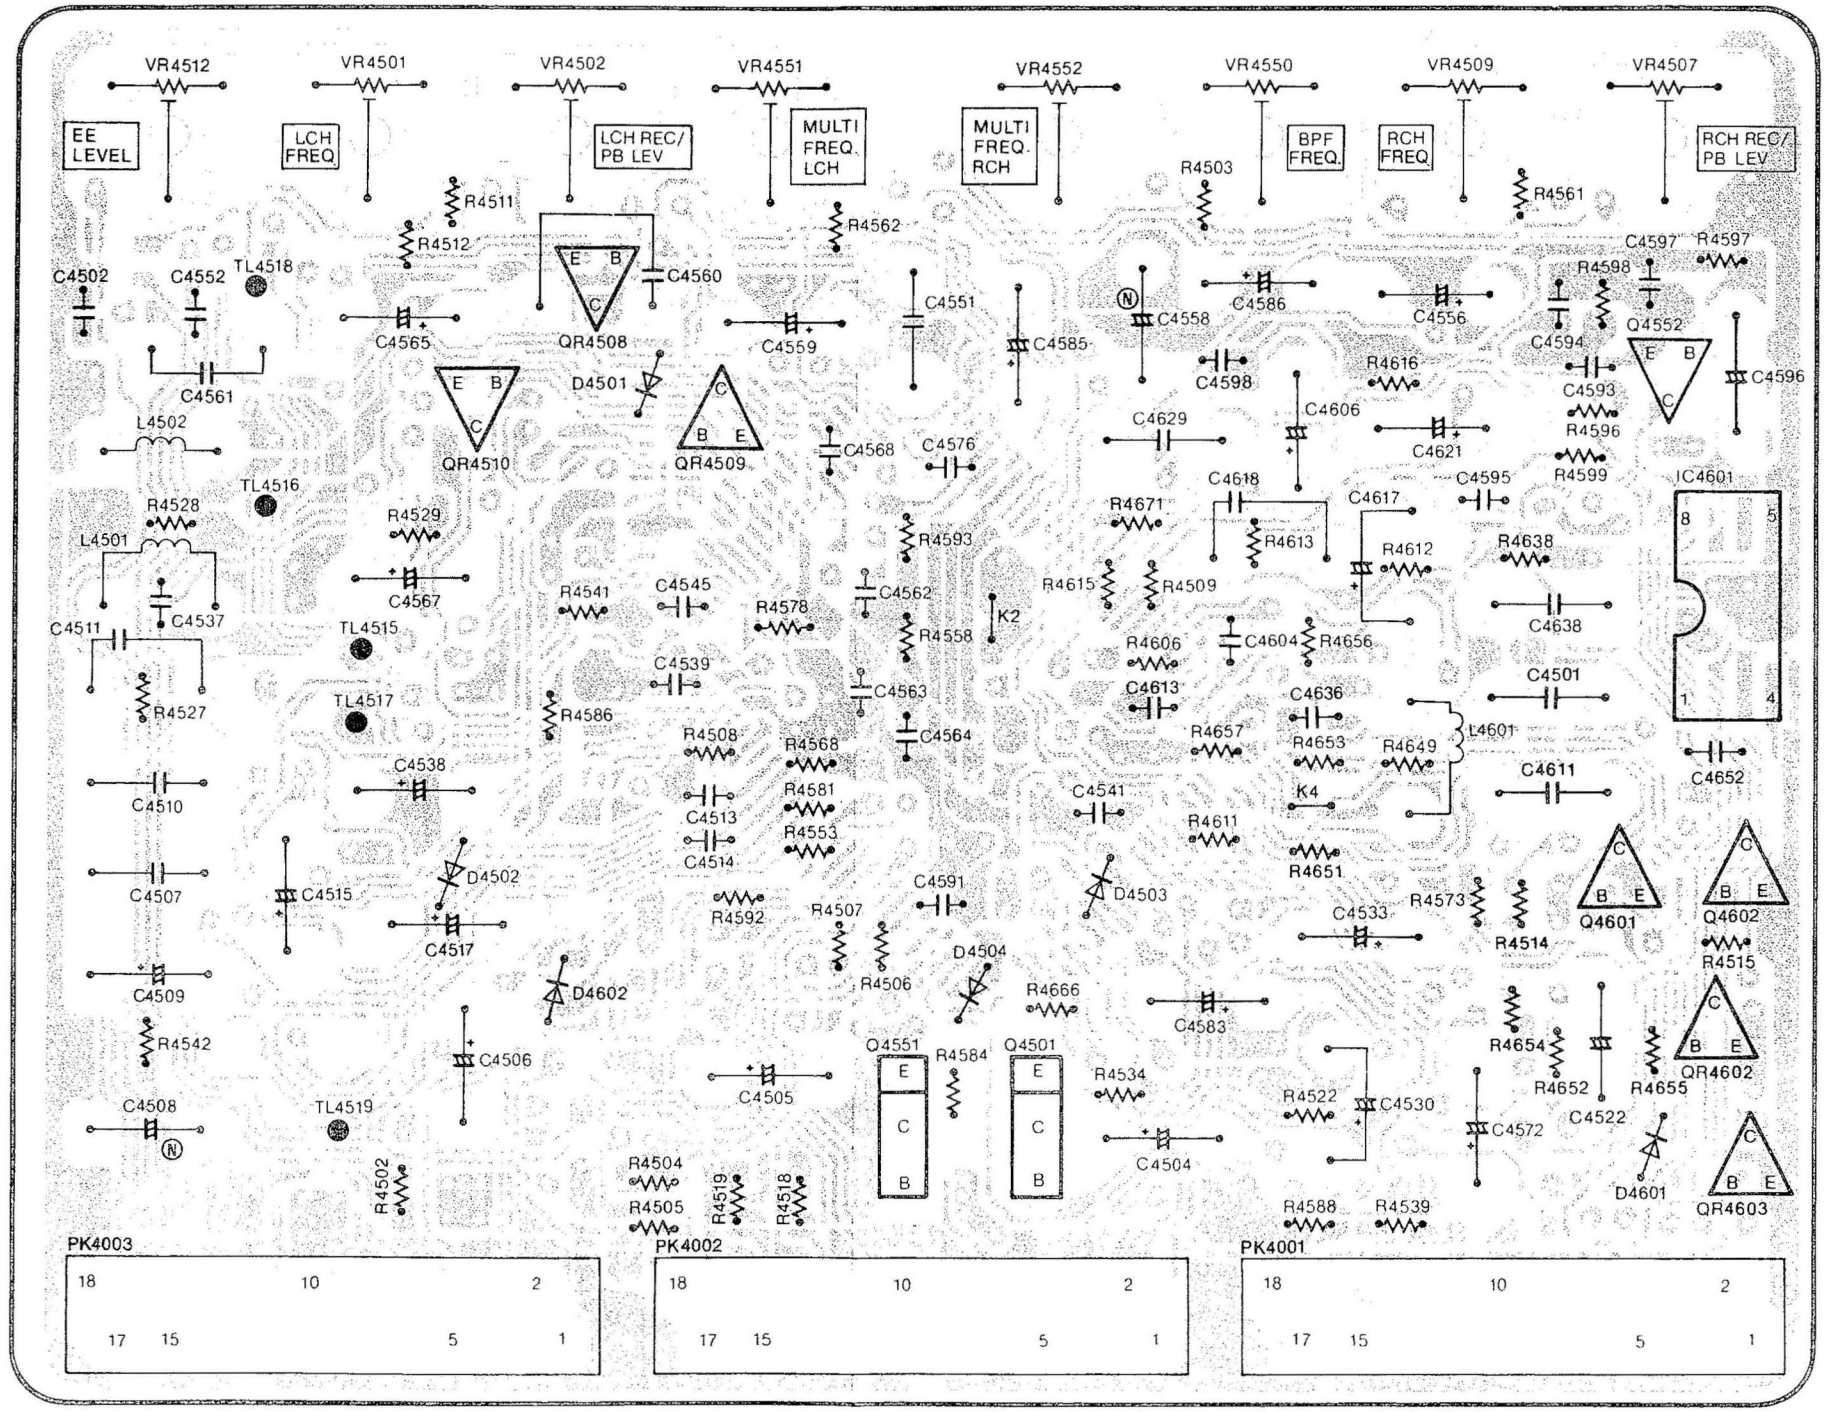
5
6
7
8
9
VR4512
VR4501
VR4502
VR4551
VR4552
VR4550
VR4509
VR4507
EE LEVEL
LCH FREQ
LCH REC/ PB LEV
MULTI FREQ. LCH
MULTI FREQ. RCH
BPF FREQ.
RCH FREQ
RCH REC/ PB LEV
R4503
R4561
R4511
R4512
R4562
C4502
C4552
TL4518
C4560
QR4508
E B C
C4565
C4559
C4551
C4585
C4558
C4586
C4556
R4598
C4597
R4597
C4594
Q4552
C4596
C4561
D4501
QR4510
QR4509
C4568
C4576
C4598
R4616
C4593
R4596
C4606
C4621
C4629
L4502
TL4516
R4528
R4529
C4618
C4617
C4595
R4599
IC4601
L4501
C4567
R4593
R4671
R4613
R4612
R4638
C4537
C4511
TL4515
R4541
C4545
R4578
C4562
R4558
K2
R4615
R4509
C4638
R4606
C4604
R4656
R4527
TL4517
C4539
C4563
C4613
C4636
C4501
R4586
R4508
R4568
C4564
R4657
R4653
R4649
L4601
C4538
C4513
R4581
C4541
K4
C4611
C4652
C4510
C4514
R4553
R4611
R4651
C4507
C4515
D4502
R4592
R4507
C4591
D4503
C4533
R4573
R4514
Q4601
Q4602
R4515
C4517
D4504
C4509
D4602
R4506
R4666
C4583
R4654
QR4602
R4542
C4506
Q4551
R4584
Q4501
R4652
R4655
C4508
TL4519
C4505
R4534
R4522
C4530
C4572
C4522
C4504
D4601
QR4603
R4502
R4504
R4505
R4519
R4518
R4588
R4539
PK4003
PK4002
PK4001
18
10
2
17
15
5
1

(FOIL SIDE)

Hi-Fi AUDIO PACK C.B.A.	
Transistor	
Q4501	A-7
Q4551	A-7
Q4552	C-9
Q4601	B-9
Q4602	B-9
Transistor & Resistor	
QR4508	C-6
QR4509	C-7
QR4510	C-6
QR4602	A-9
QR4603	A-9
Integrated Circuit	
IC4501	B-3
IC4601	C-9
Adjustment	
VR4501	D-6
VR4502	D-6
VR4507	D-9
VR4509	D-8
VR4512	D-5
VR4550	D-8
VR4551	D-7
VR4552	D-7
Connector	
PS4001	A-1
PS4001	A-8
PS4002	A-2
PS4002	A-7
PS4003	A-4
PS4003	A-5

ADDRESS INFORMATION

20 NICAM DECODER PACK SCHEMATIC DIAGRAM (NV-HS1000BYP, 800BY ONLY)

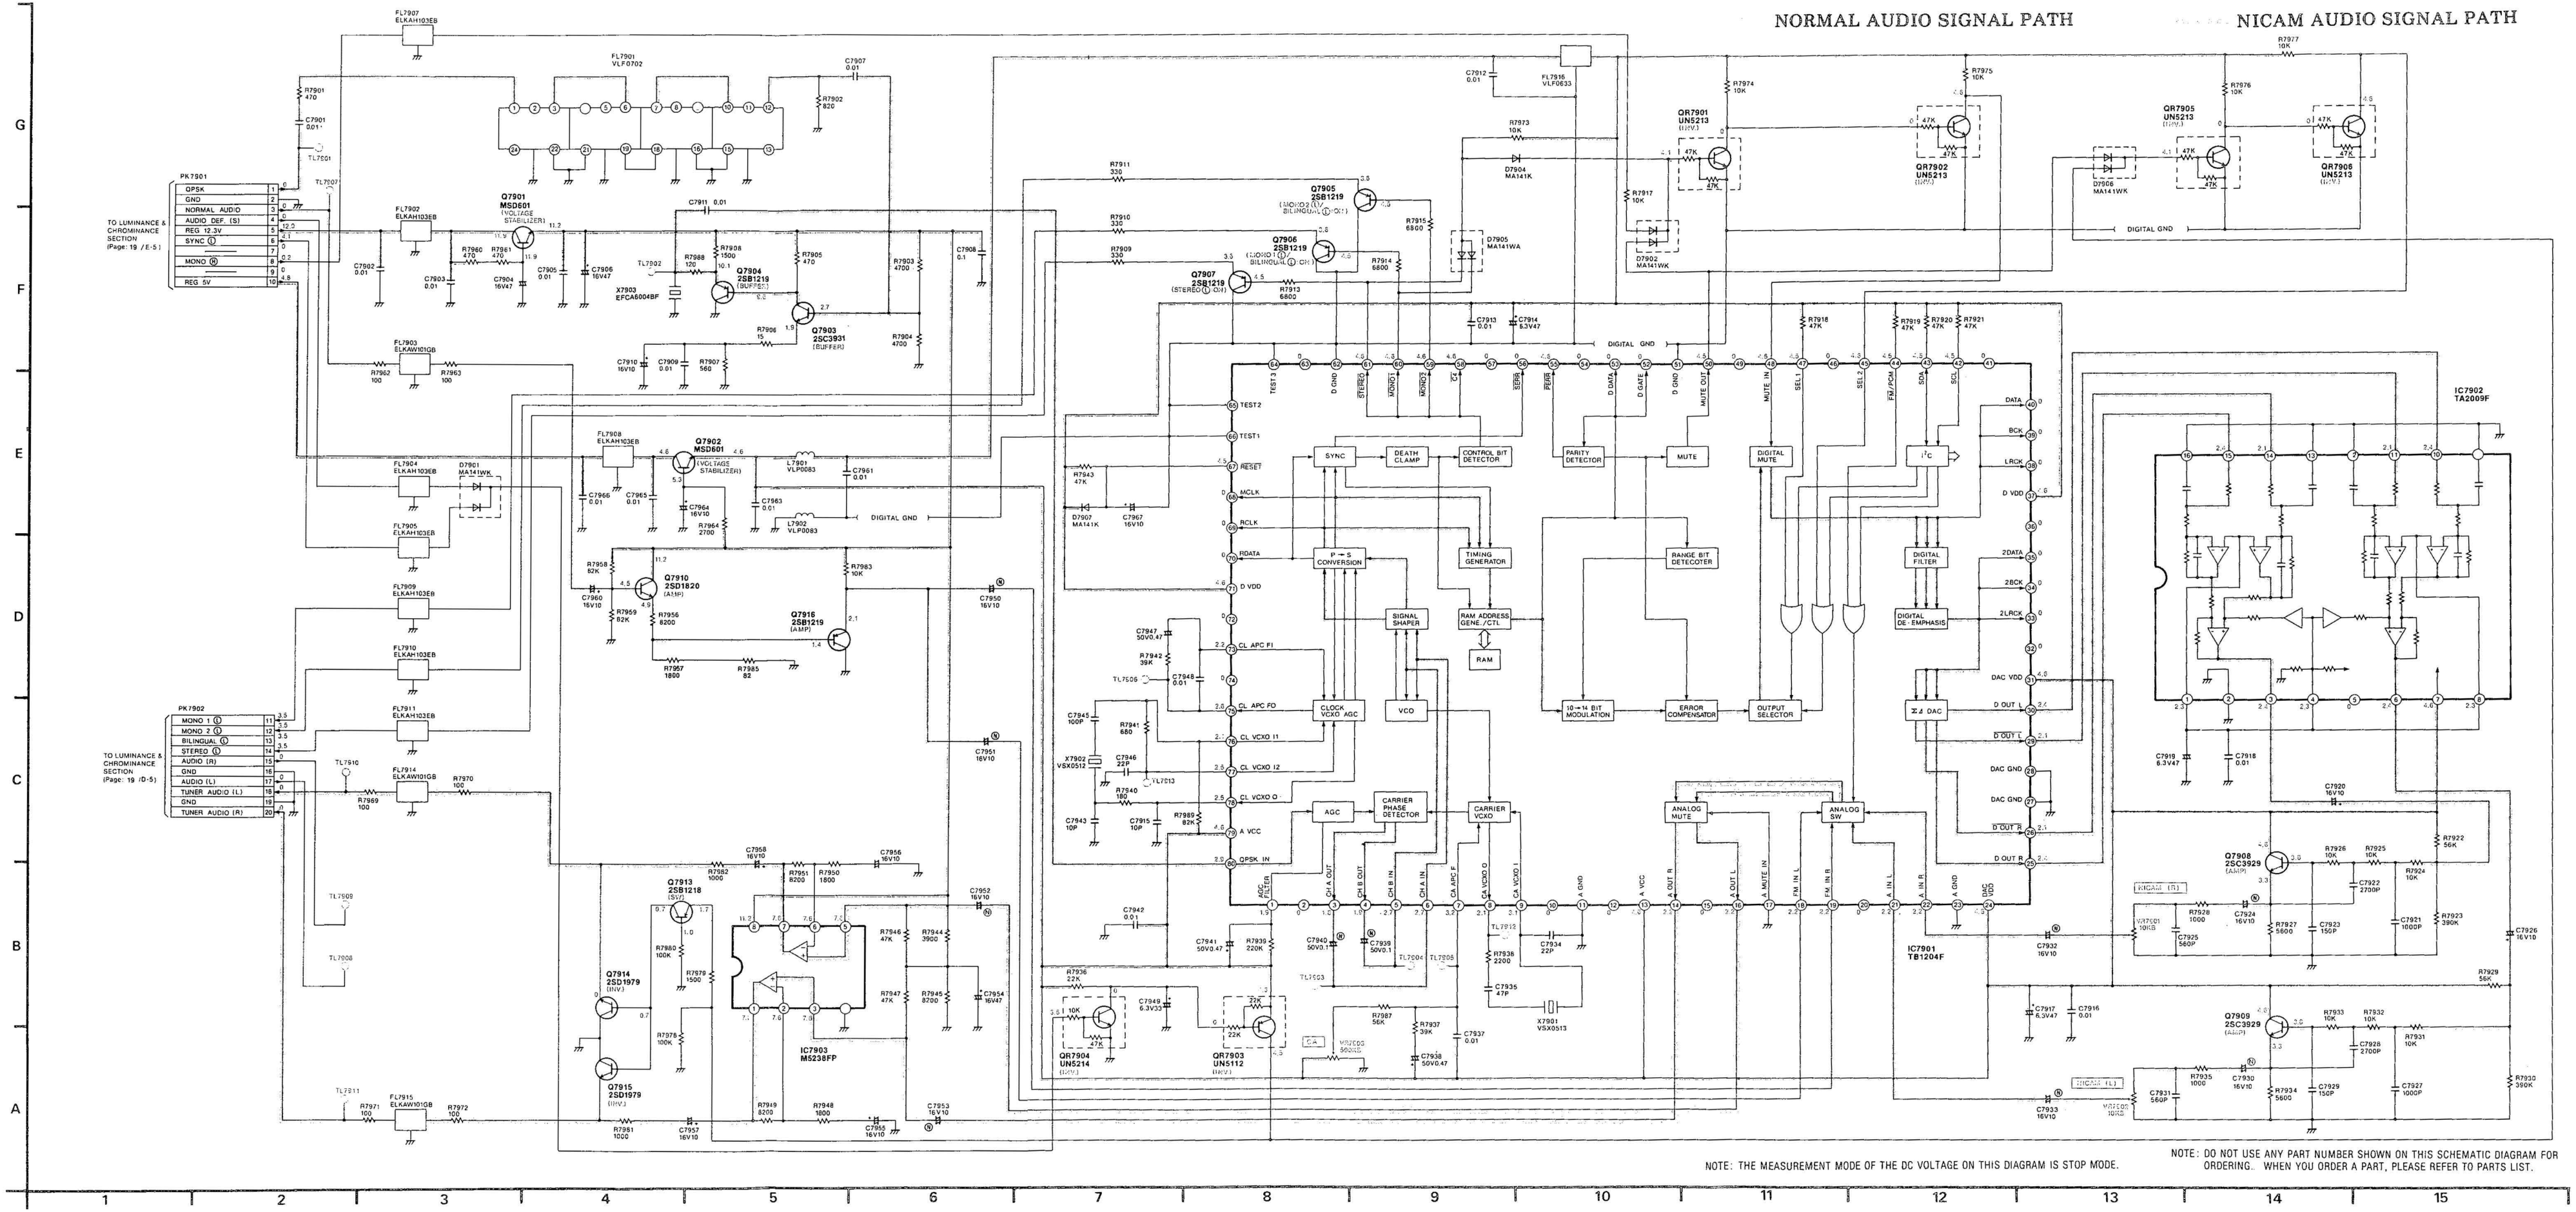
NORMAL AUDIO SIGNAL PATH
NICAM AUDIO SIGNAL PATH
PK7901
QPSK
GND
NORMAL AUDIO
AUDIO DEF. (S)
REG 12.3V
SYNC
MONO
REG 5V
TO LUMINANCE & CHROMINANCE SECTION (Page: 19 /E-5)
PK7902
MONO 1
MONO 2
BILINGUAL
STEREO
AUDIO (R)
GND
AUDIO (L)
TUNER AUDIO (L)
GND
TUNER AUDIO (R)
TO LUMINANCE & CHROMINANCE SECTION (Page: 19 /D-5)
FL7901 VLF0702
Q7901 MSD601 (VOLTAGE STABILIZER)
Q7902 MSD601 (VOLTAGE STABILIZER)
Q7903 2SC3931 (BUFFER)
Q7904 2SB1219 (BUFFER)
Q7905 2SB1219
Q7906 2SB1219
Q7907 2SB1219
Q7908 2SC3929 (AMP)
Q7909 2SC3929 (AMP)
Q7910 2SD1820 (AMP)
Q7913 2SB1218 (SW)
Q7914 2SD1979 (INV)
Q7915 2SD1979 (INV)
Q7916 2SB1219 (AMP)
QR7901 UN5213
QR7902 UN5213
QR7903 UN5112
QR7904 UN5214
QR7905 UN5213
QR7906 UN5213
X7901 VSX0513
X7902 VSX0512
X7903 EFCA5004BF
IC7901 TB1204F
IC7902 TA2009F
IC7903 M5238FP
SYNC
DEATH CLAMP
CONTROL BIT DETECTOR
PARITY DETECTOR
MUTE
DIGITAL MUTE
I²C
P→S CONVERSION
TIMING GENERATOR
RANGE BIT DETECOTER
DIGITAL FILTER
SIGNAL SHAPER
RAM ADDRESS GENE./CTL
RAM
DIGITAL DE-EMPHASIS
CLOCK VCXO AGC
VCO
10→14 BIT MODULATION
ERROR COMPENSATOR
OUTPUT SELECTOR
ΣΔ DAC
AGC
CARRIER PHASE DETECTOR
CARRIER VCXO
ANALOG MUTE
ANALOG SW
DIGITAL GND
NICAM (R)
NICAM (L)
A B C D E F G
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

NOTE: THE MEASUREMENT MODE OF THE DC VOLTAGE ON THIS DIAGRAM IS STOP MODE.

NOTE: DO NOT USE ANY PART NUMBER SHOWN ON THIS SCHEMATIC DIAGRAM FOR ORDERING. WHEN YOU ORDER A PART, PLEASE REFER TO PARTS LIST.

21 NICAM DECODER PACK C.B.A. (VEP07675G: NV-HS1000BYP, 800BY ONLY)

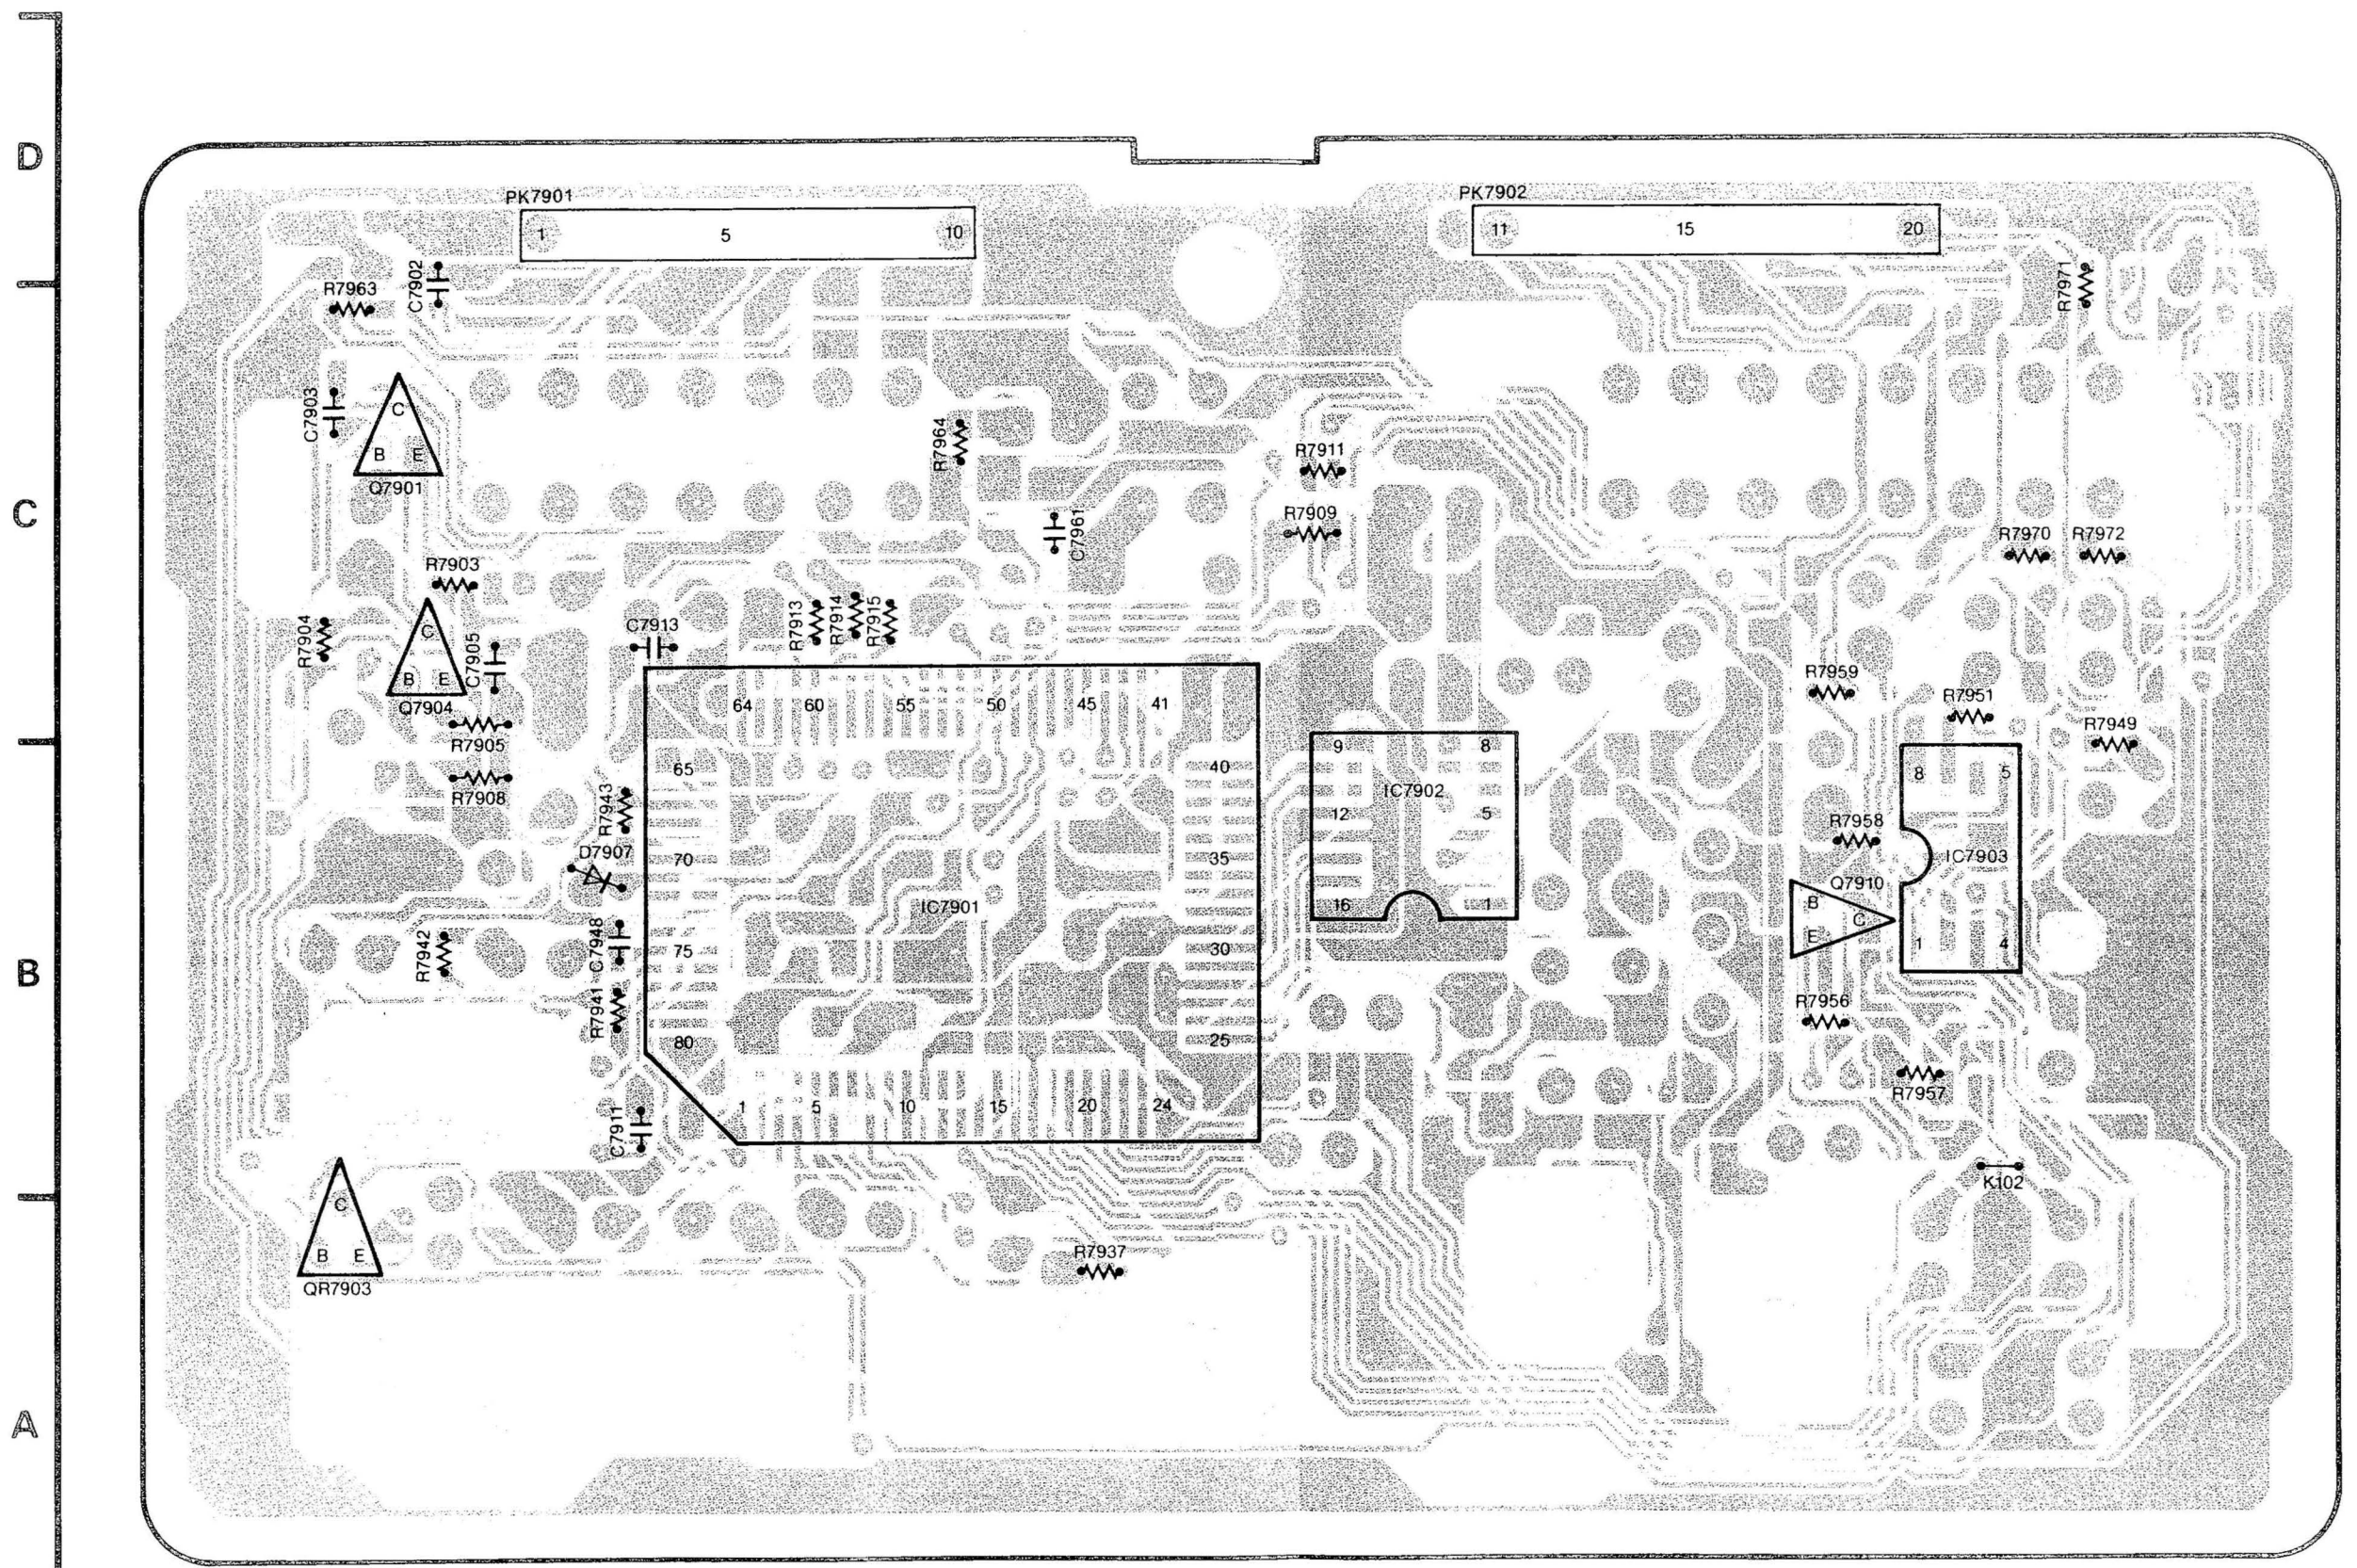
D
C
B
A
PK7901
PK7902
IC7901
IC7902
IC7903
Q7901
Q7904
Q7910
QR7903
D7907
K102
1
2
3
4
5

(COMPONENT SIDE)

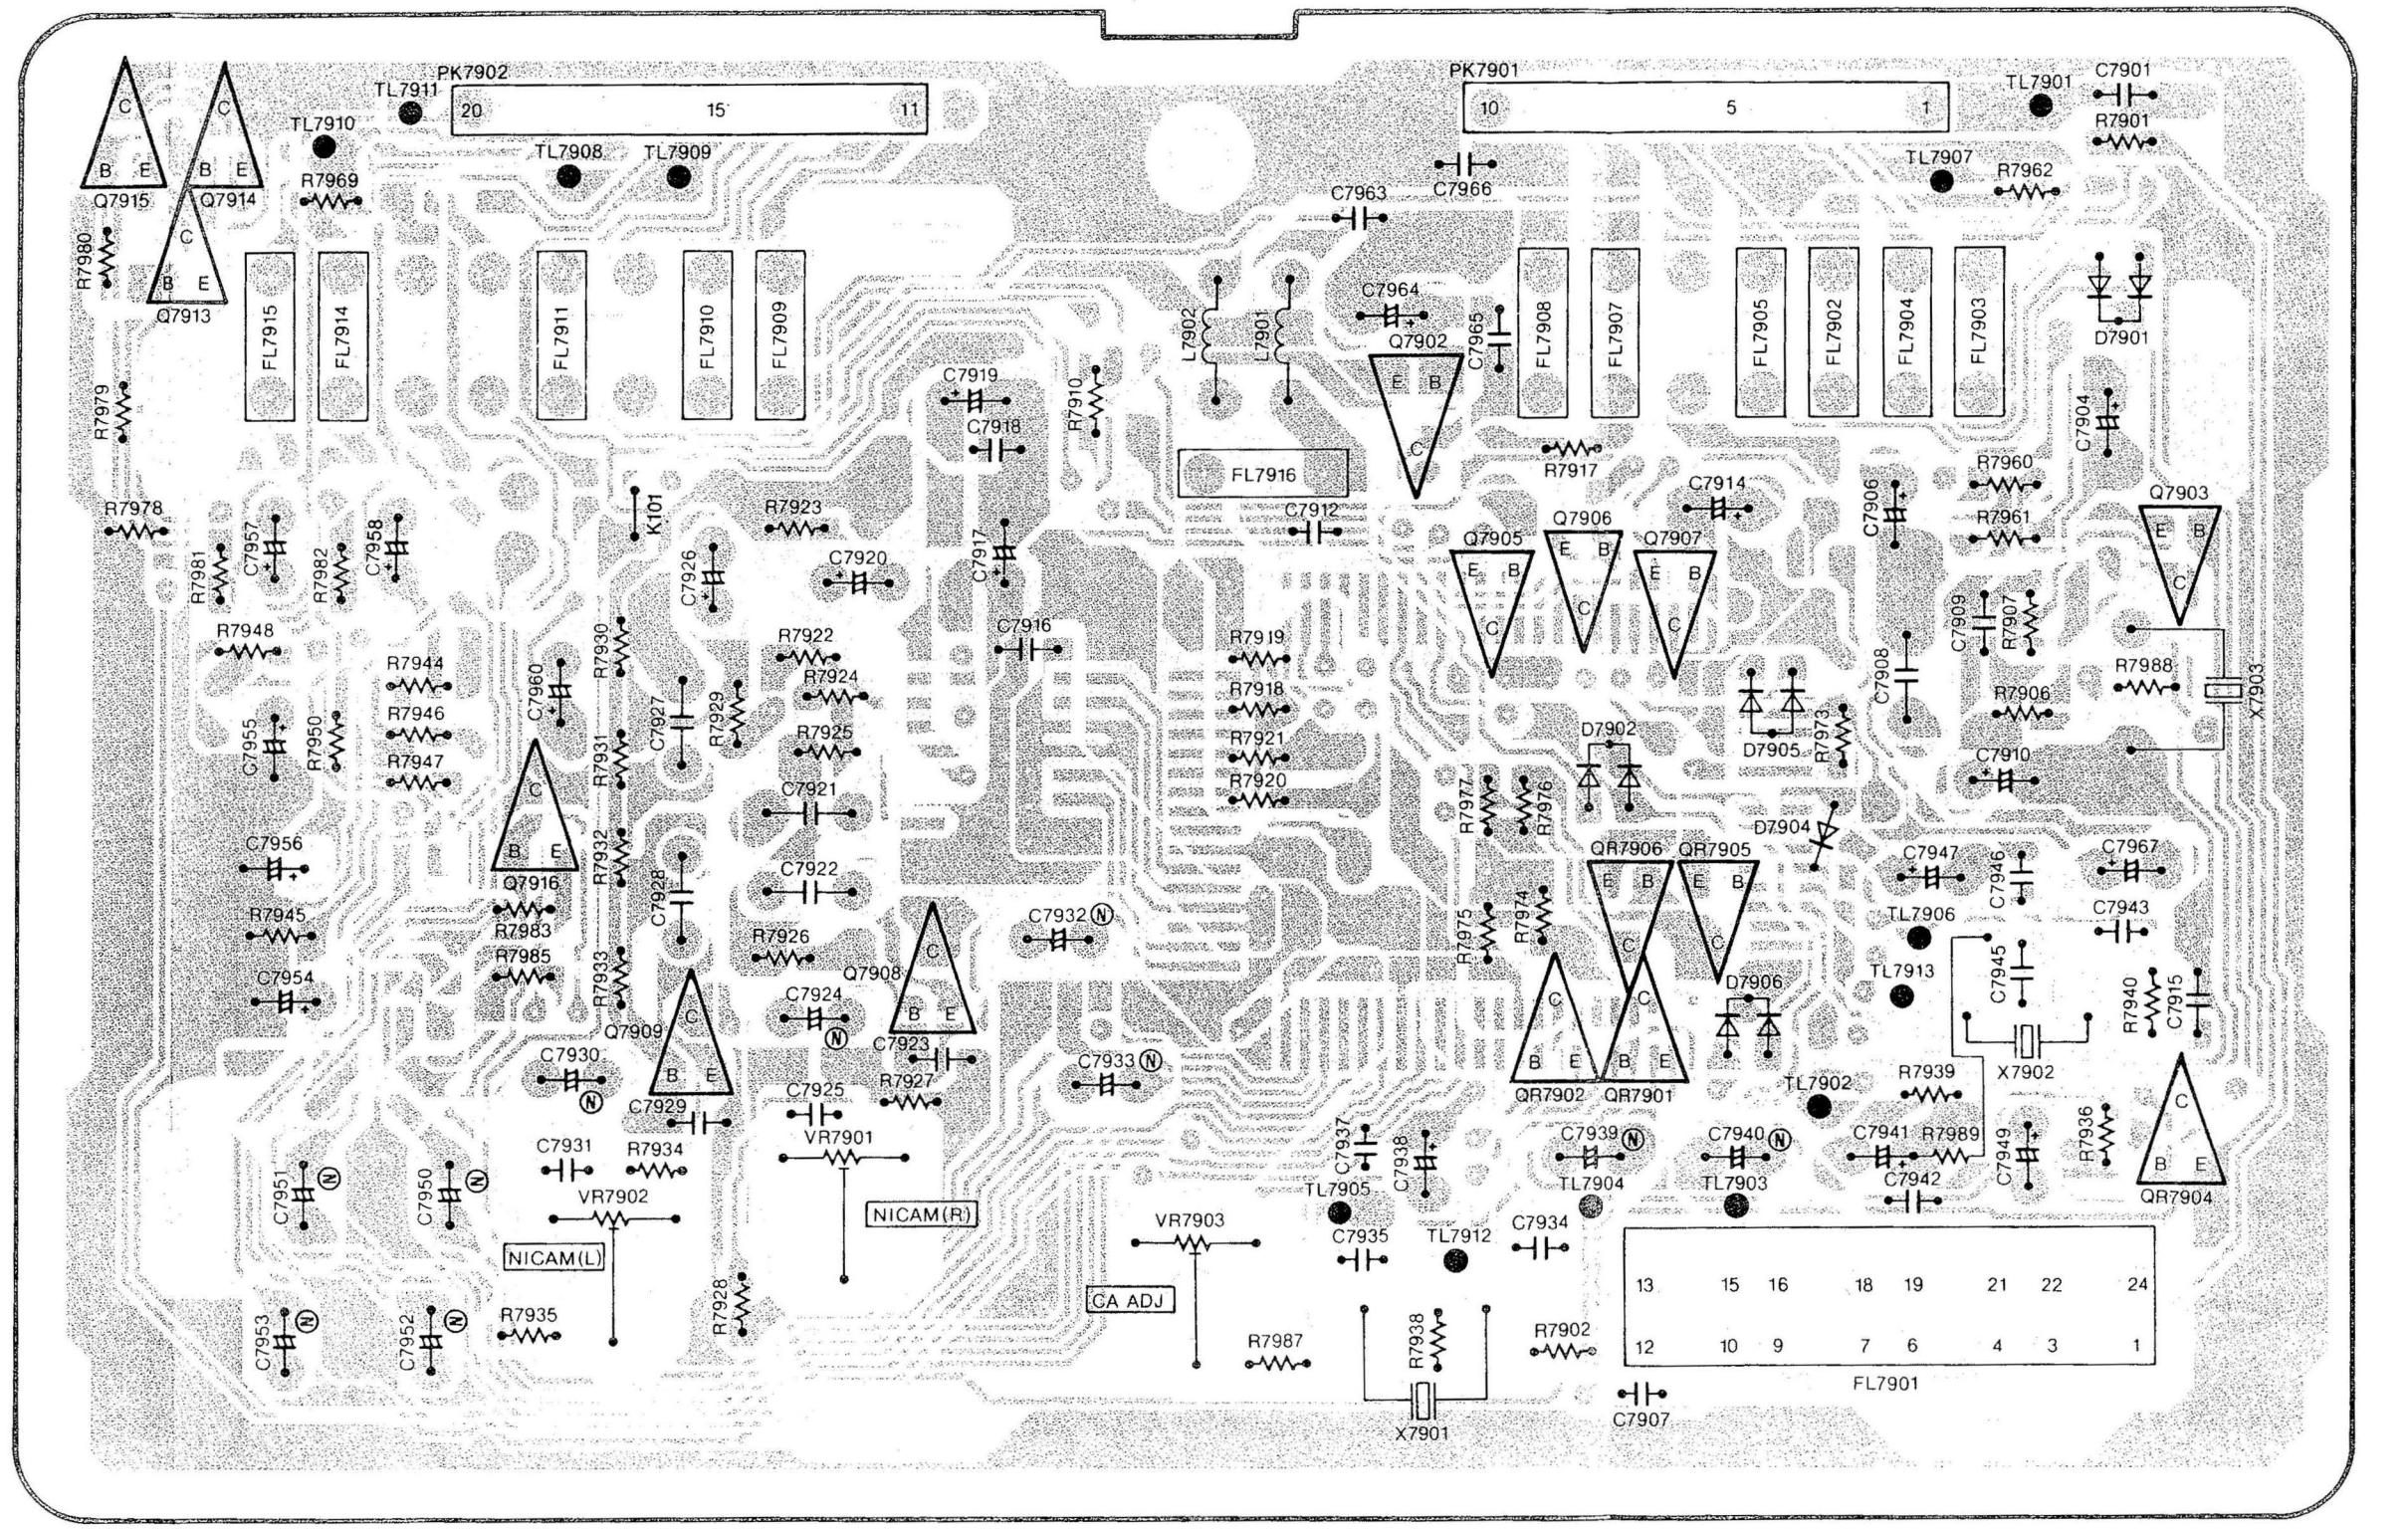
PK7901
PK7902
FL7901
FL7916
X7901
X7902
X7903
VR7901
VR7902
VR7903
NICAM(L)
NICAM(R)
CA ADJ
QR7901
QR7902
QR7904
QR7905
QR7906
6
7
8
9
10

(FOIL SIDE)

NICAM DECODER PACK C.B.A.	
Transistor	
Q7901	C-1
Q7902	C-9
Q7903	C-10
Q7904	C-1
Q7905	C-9
Q7906	C-9
Q7907	C-9
Q7908	B-8
Q7909	B-7
Q7910	B-4
Q7913	C-6
Q7914	D-6
Q7915	D-6
Q7916	B-7
Transistor & Resistor	
QR7901	B-5
QR7902	B-9
QR7903	A-1
QR7904	A-10
QR7905	B-9
QR7906	B-9
Integrated Circuit	
IC7901	B-2
IC7902	B-3
IC7903	B-5
Adjustment	
VR7901	A-8
VR7902	A-7
VR7903	A-8
Connector	
PK7901	D-2
PK7901	D-9
PK7902	D-4
PK7902	D-7

ADDRESS INFORMATION

22 TIMER C.B A (VEP07739X: NV-HS1000EGC) (VEP07739AC: NV-HS1000BYP) (VEP07739AD: NV-HS1000ECP) (VEP07739Z: NV-HS800BY) (VEP07739AA: NV-HS800ECC) & VR C.B.A. (VEP06B45A)

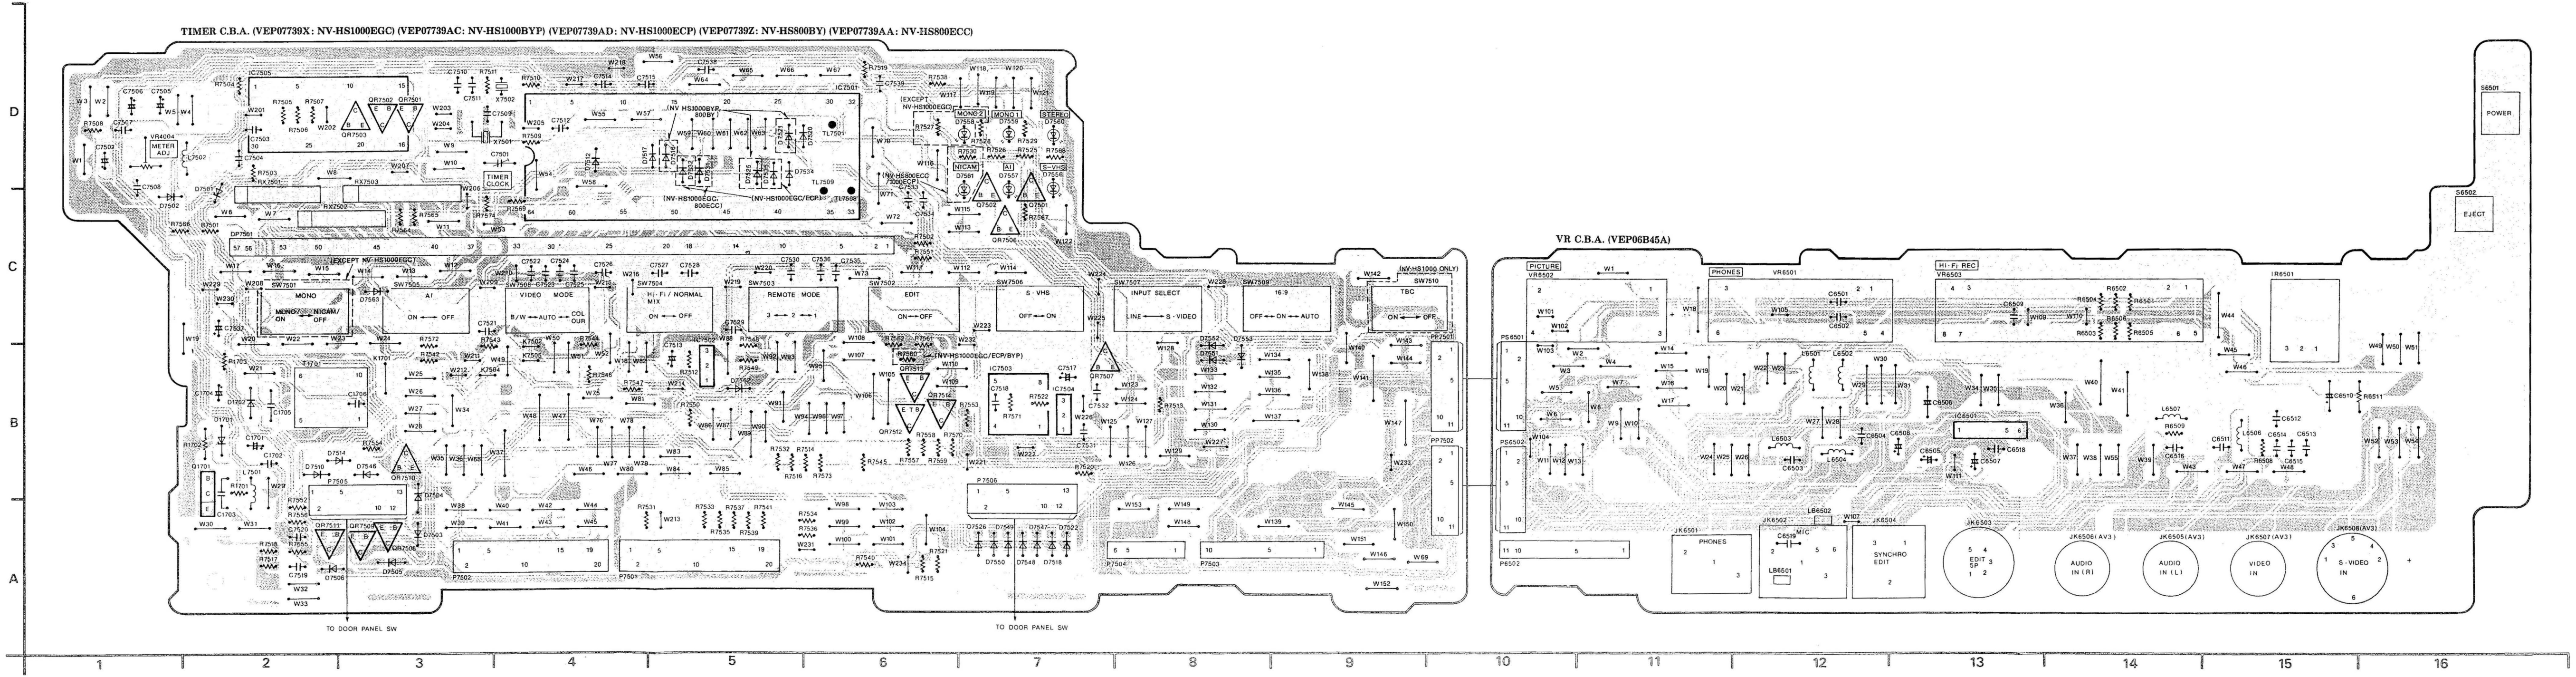
TIMER C.B.A. (VEP07739X: NV-HS1000EGC) (VEP07739AC: NV-HS1000BYP) (VEP07739AD: NV-HS1000ECP) (VEP07739Z: NV-HS800BY) (VEP07739AA: NV-HS800ECC)
VR C.B.A. (VEP06B45A)
D
C
B
A
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
MONO
A1
VIDEO MODE
Hi-Fi / NORMAL MIX
REMOTE MODE
EDIT
S-VHS
INPUT SELECT
16:9
TBC
PICTURE
PHONES
Hi-Fi REC
POWER
EJECT
TIMER CLOCK
METER ADJ
NICAM
STEREO
PHONES
MIC
SYNCHRO EDIT
EDIT SP
AUDIO IN (R)
AUDIO IN (L)
VIDEO IN
S-VIDEO IN
TO DOOR PANEL SW
TO DOOR PANEL SW

TIMER C.B.A. & VR C.B.A.	
Transistor	
Q1701	B-2
Q7501	A-7
Q7502	A-7
Transistor & Resistor	
QR7501	D-3
QR7502	D-3
QR7503	D-3
QR7506	C-7
QR7507	B-7
QR7508	A-3
QR7509	A-3
QR7510	B-3
QR7511	A-2
QR7512	B-6
QR7513	B-6
QR7514	B-6
Integrated Circuit	
IC6501	B-13
IC7501	D-6
IC7502	B-5
IC7503	B-7
IC7504	B-7
IC7505	D-2
Adjustment	
C7501	D-4
VR4004	D-1
VR6501	C-12
VR6502	C-10
VR6503	C-13
Connector	
P6502	A-10
P7501	A-4
P7502	A-4
P7503	A-8
P7504	A-8
P7505	B-2
P7506	B-7
PP7501	B-10
PP7502	B-10
PS6501	B-10
PS6502	B-10

ADDRESS INFORMATION

23 TIMER & VR SCHEMATIC DIAGRAM

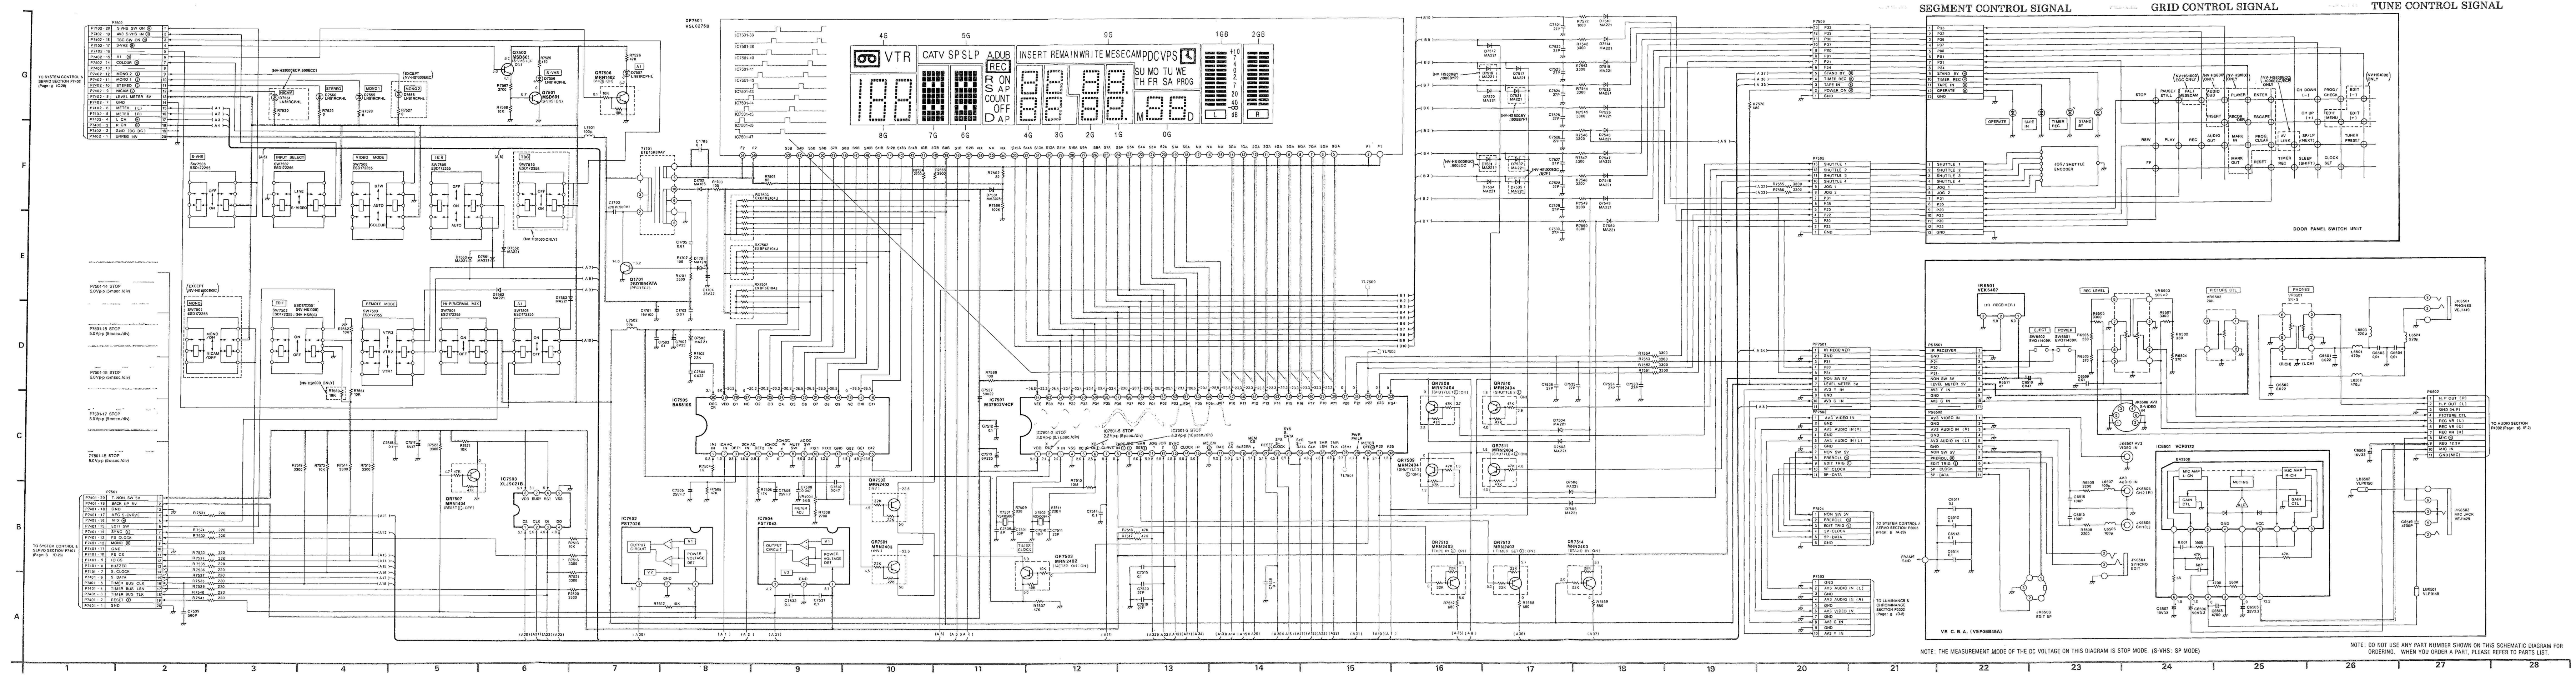
SEGMENT CONTROL SIGNAL
GRID CONTROL SIGNAL
TUNE CONTROL SIGNAL
DF7501 VSL0276B
IC7505 BA6810S
IC7501 M37502V4CP
IC7502 PST7026
IC7503 XL29C01B
IC7504 PST7043
DOOR PANEL SWITCH UNIT
IC6501 VCR0102
VR C. B. A. (VEP06B45A)
TO SYSTEM CONTROL & SERVO SECTION P7402
TO SYSTEM CONTROL & SERVO SECTION P7401
TO AUDIO SECTION P4002
TO LUMINANCE & CHROMINANCE SECTION P6003
A
B
C
D
E
F
G

NOTE: THE MEASUREMENT MODE OF THE DC VOLTAGE ON THIS DIAGRAM IS STOP MODE. (S-VHS: SP MODE)

NOTE: DO NOT USE ANY PART NUMBER SHOWN ON THIS SCHEMATIC DIAGRAM FOR ORDERING. WHEN YOU ORDER A PART, PLEASE REFER TO PARTS LIST.

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28

24 PDC PACK SCHEMATIC DIAGRAM (NV-HS1000BYP/ECP ONLY)

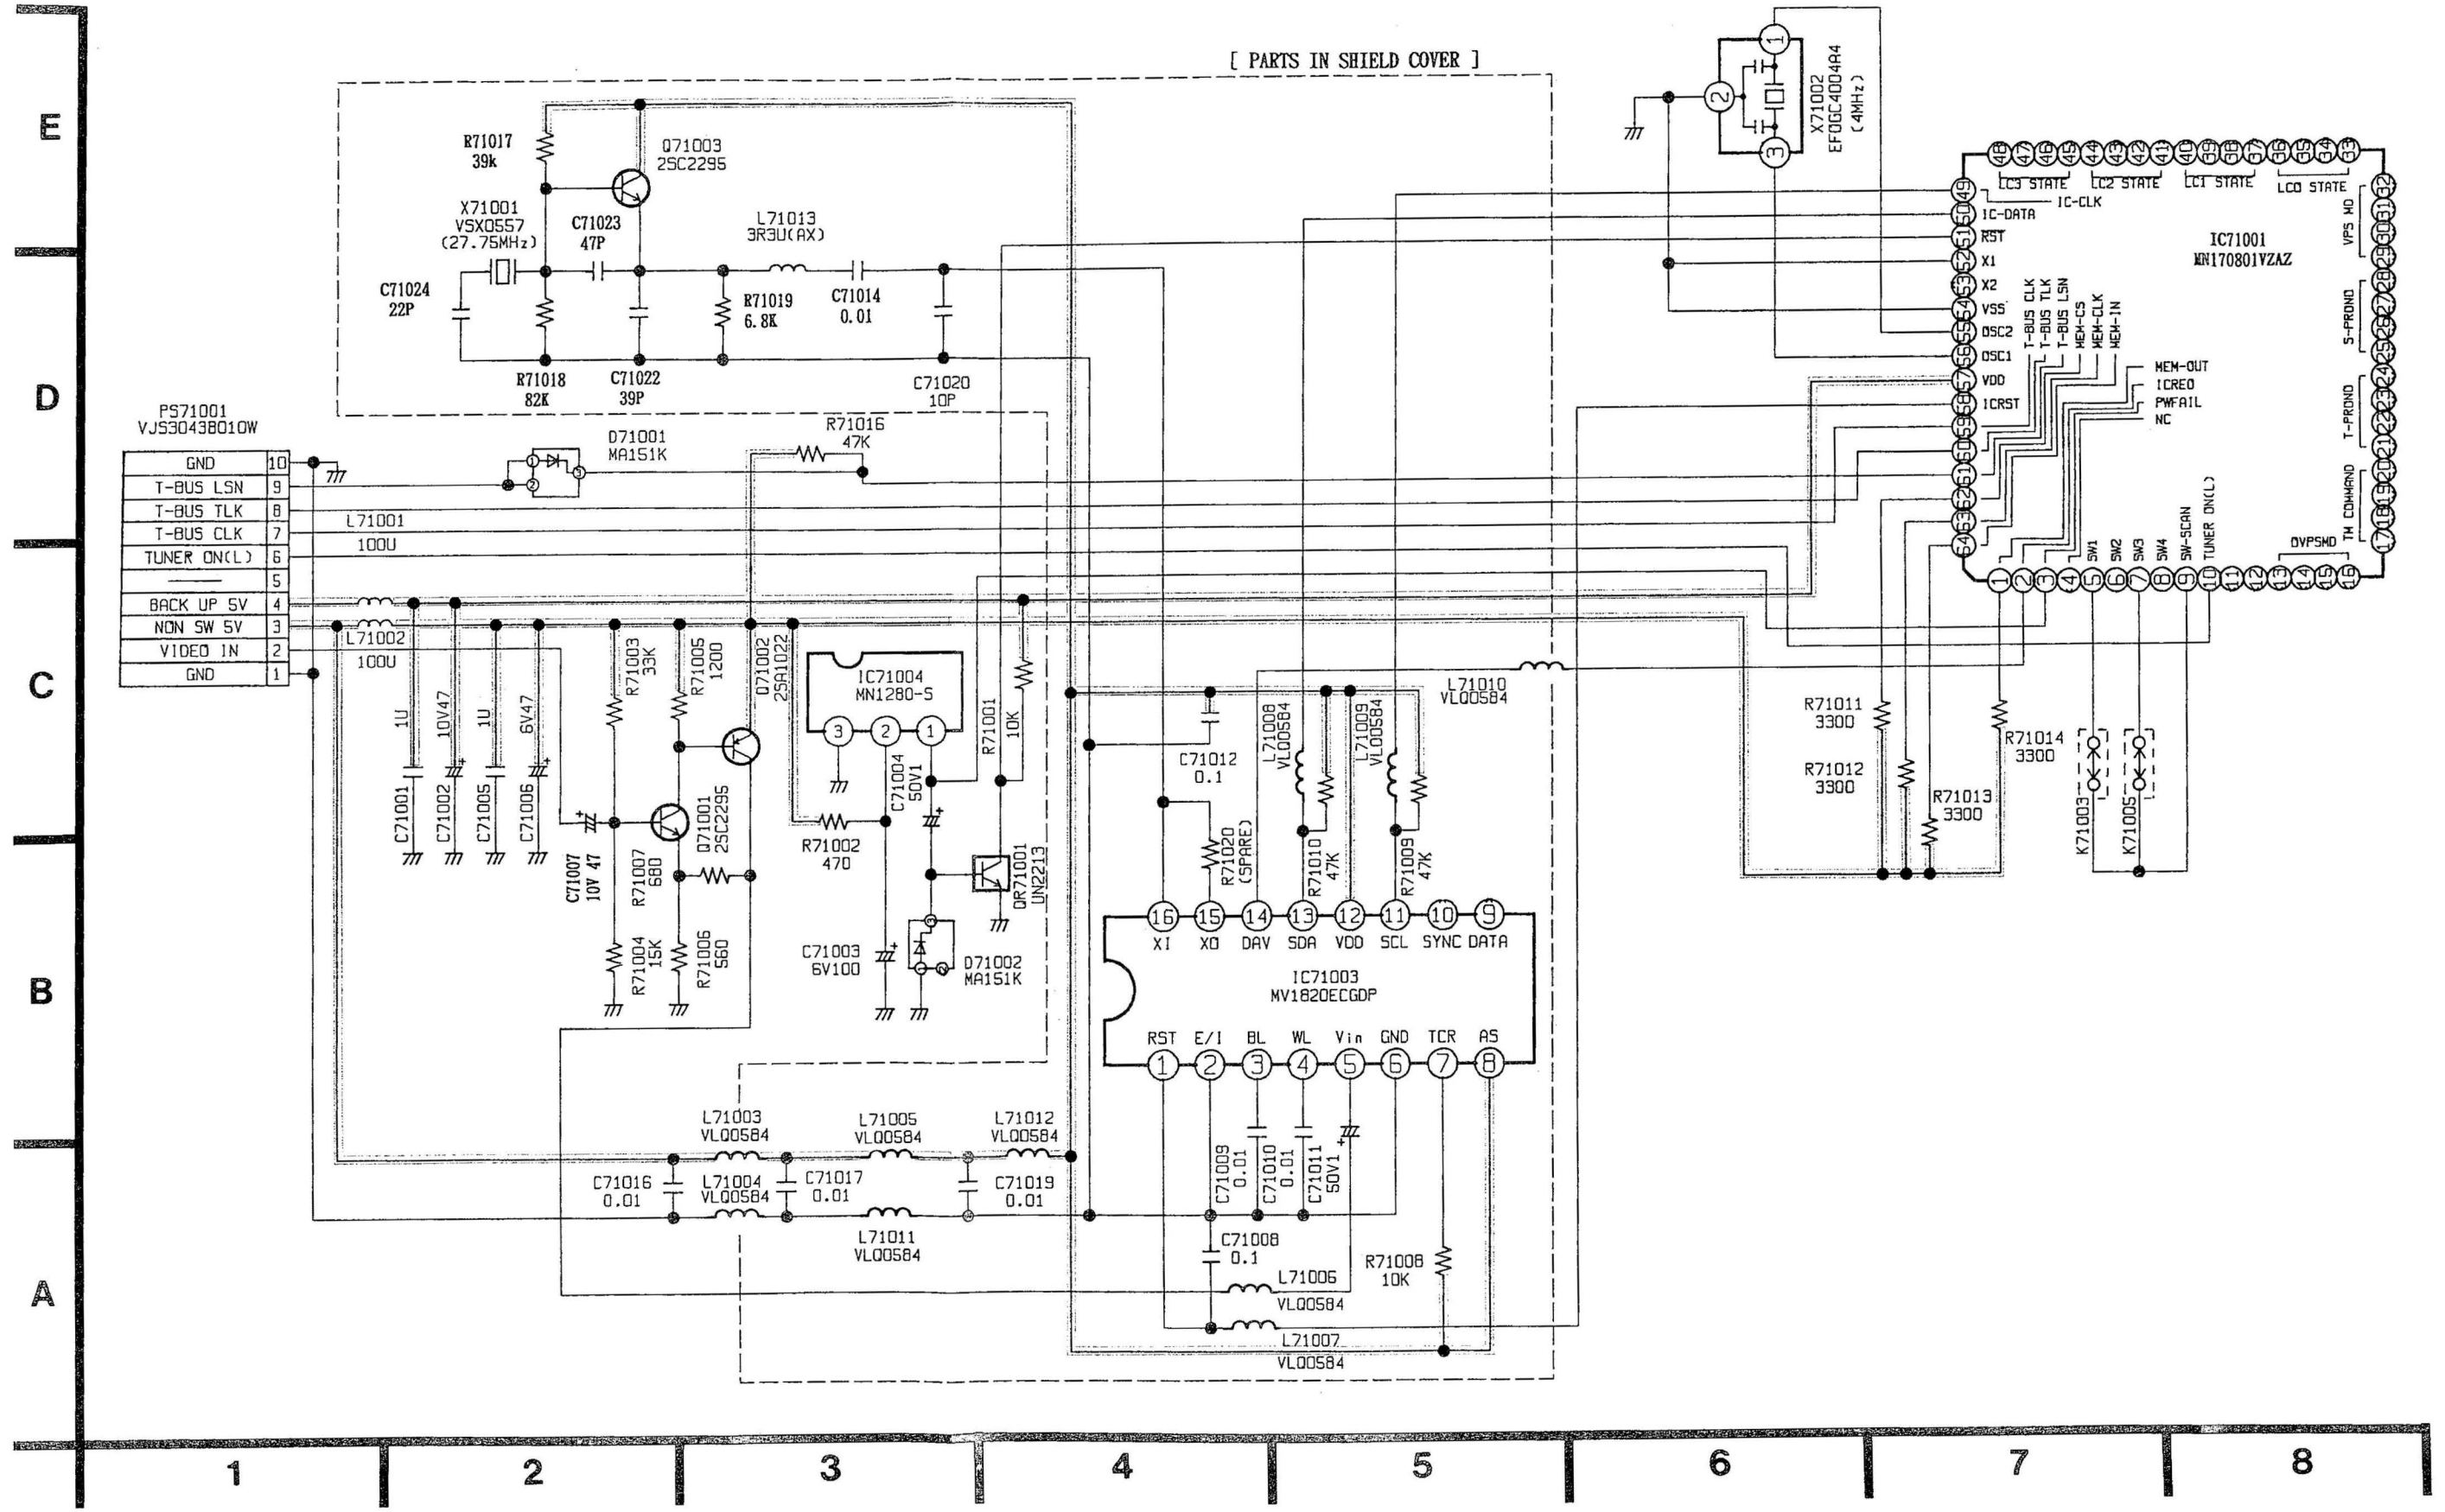
[PARTS IN SHIELD COVER]
E
D
C
B
A
1
2
3
4
5
6
7
8
R71017
39k
Q71003
2SC2295
X71001
VSX0557
(27.75MHz)
C71023
47P
L71013
3R3U(AX)
C71024
22P
R71019
6.8K
C71014
0.01
R71018
82K
C71022
39P
C71020
10P
PS71001
VJS3043B010W
GND
T-BUS LSN
T-BUS TLK
T-BUS CLK
TUNER ON(L)
BACK UP 5V
NON SW 5V
VIDEO IN
GND
D71001
MA151K
R71016
47K
L71001
100U
L71002
100U
C71001
1U
C71002
10V47
C71005
1U
C71006
6V47
C71007
10V 47
R71003
33K
R71005
1200
Q71002
2SA1022
Q71001
2SC2295
R71007
680
R71004
15K
R71006
560
IC71004
MN1280-S
R71002
470
C71004
50V1
C71003
6V100
D71002
MA151K
R71001
10K
QR71001
UN2213
C71012
0.1
L71008
VLQ0584
L71009
VLQ0584
R71020
(SPARE)
R71010
47K
R71009
47K
L71010
VLQ0584
XI
XO
DAV
SDA
VDD
SCL
SYNC
DATA
IC71003
MV1820ECGDP
RST
E/I
BL
WL
Vin
GND
TCR
AS
L71003
VLQ0584
L71005
VLQ0584
L71012
VLQ0584
C71016
0.01
L71004
VLQ0584
C71017
0.01
C71019
0.01
L71011
VLQ0584
C71009
0.01
C71010
0.01
C71011
50V1
C71008
0.1
R71008
10K
L71006
VLQ0584
L71007
VLQ0584
X71002
EFOGC4004A4
(4MHz)
IC71001
MN170801VZAZ
LC3 STATE
LC2 STATE
LC1 STATE
LC0 STATE
IC-CLK
IC-DATA
RST
X1
X2
VSS
OSC2
OSC1
VDD
ICRST
T-BUS CLK
T-BUS TLK
T-BUS LSN
MEM-CS
MEM-CLK
MEM-IN
MEM-OUT
ICREQ
PWFAIL
NC
VPS MD
S-PROND
T-PROND
TM COMMAND
DVPSMD
SW1
SW2
SW3
SW4
SW-SCAN
TUNER ON(L)
R71011
3300
R71012
3300
R71013
3300
R71014
3300
K71003
K71005

25 PDC PACK C.B.A. (VEP07709A: NV-HS1000BYP/ECP ONLY)

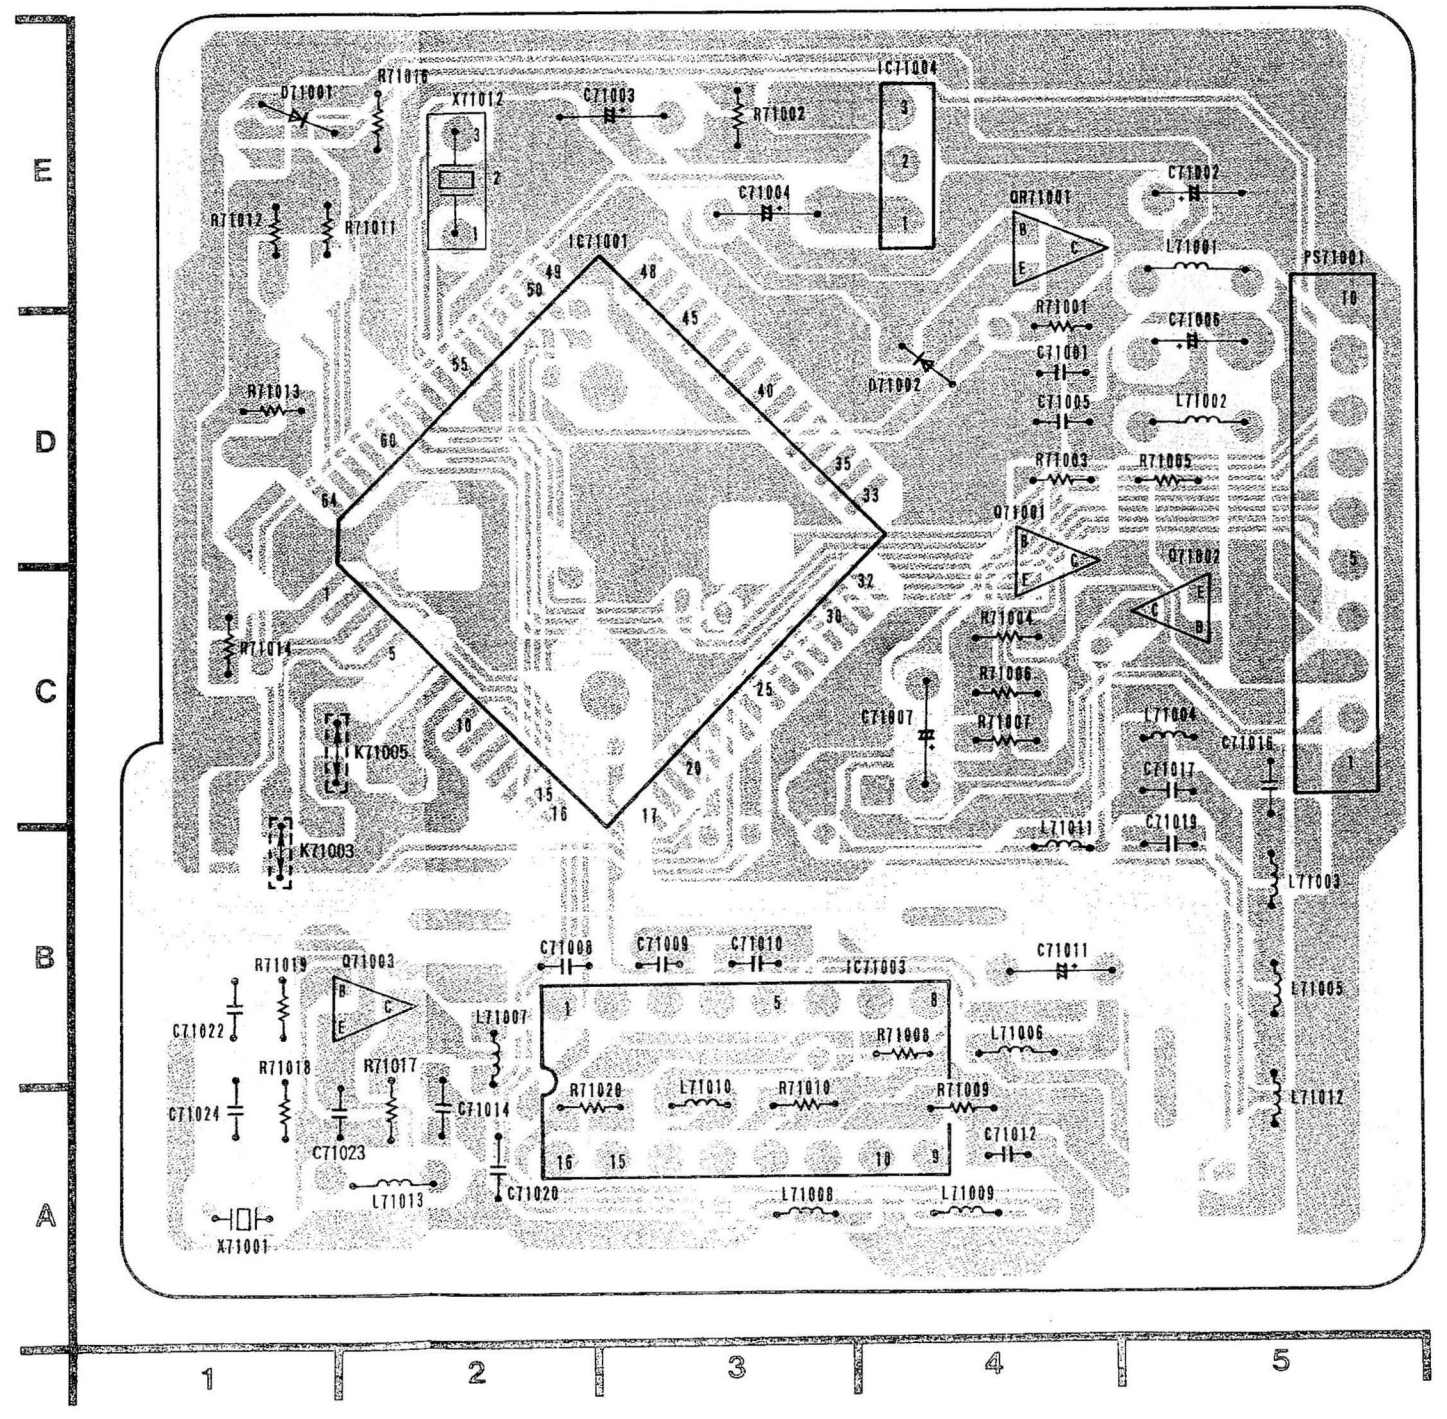
E
D
C
B
A
1
2
3
4
5

26 EXPLODED VIEW

❶ CHASSIS PARTS SECTION (1)

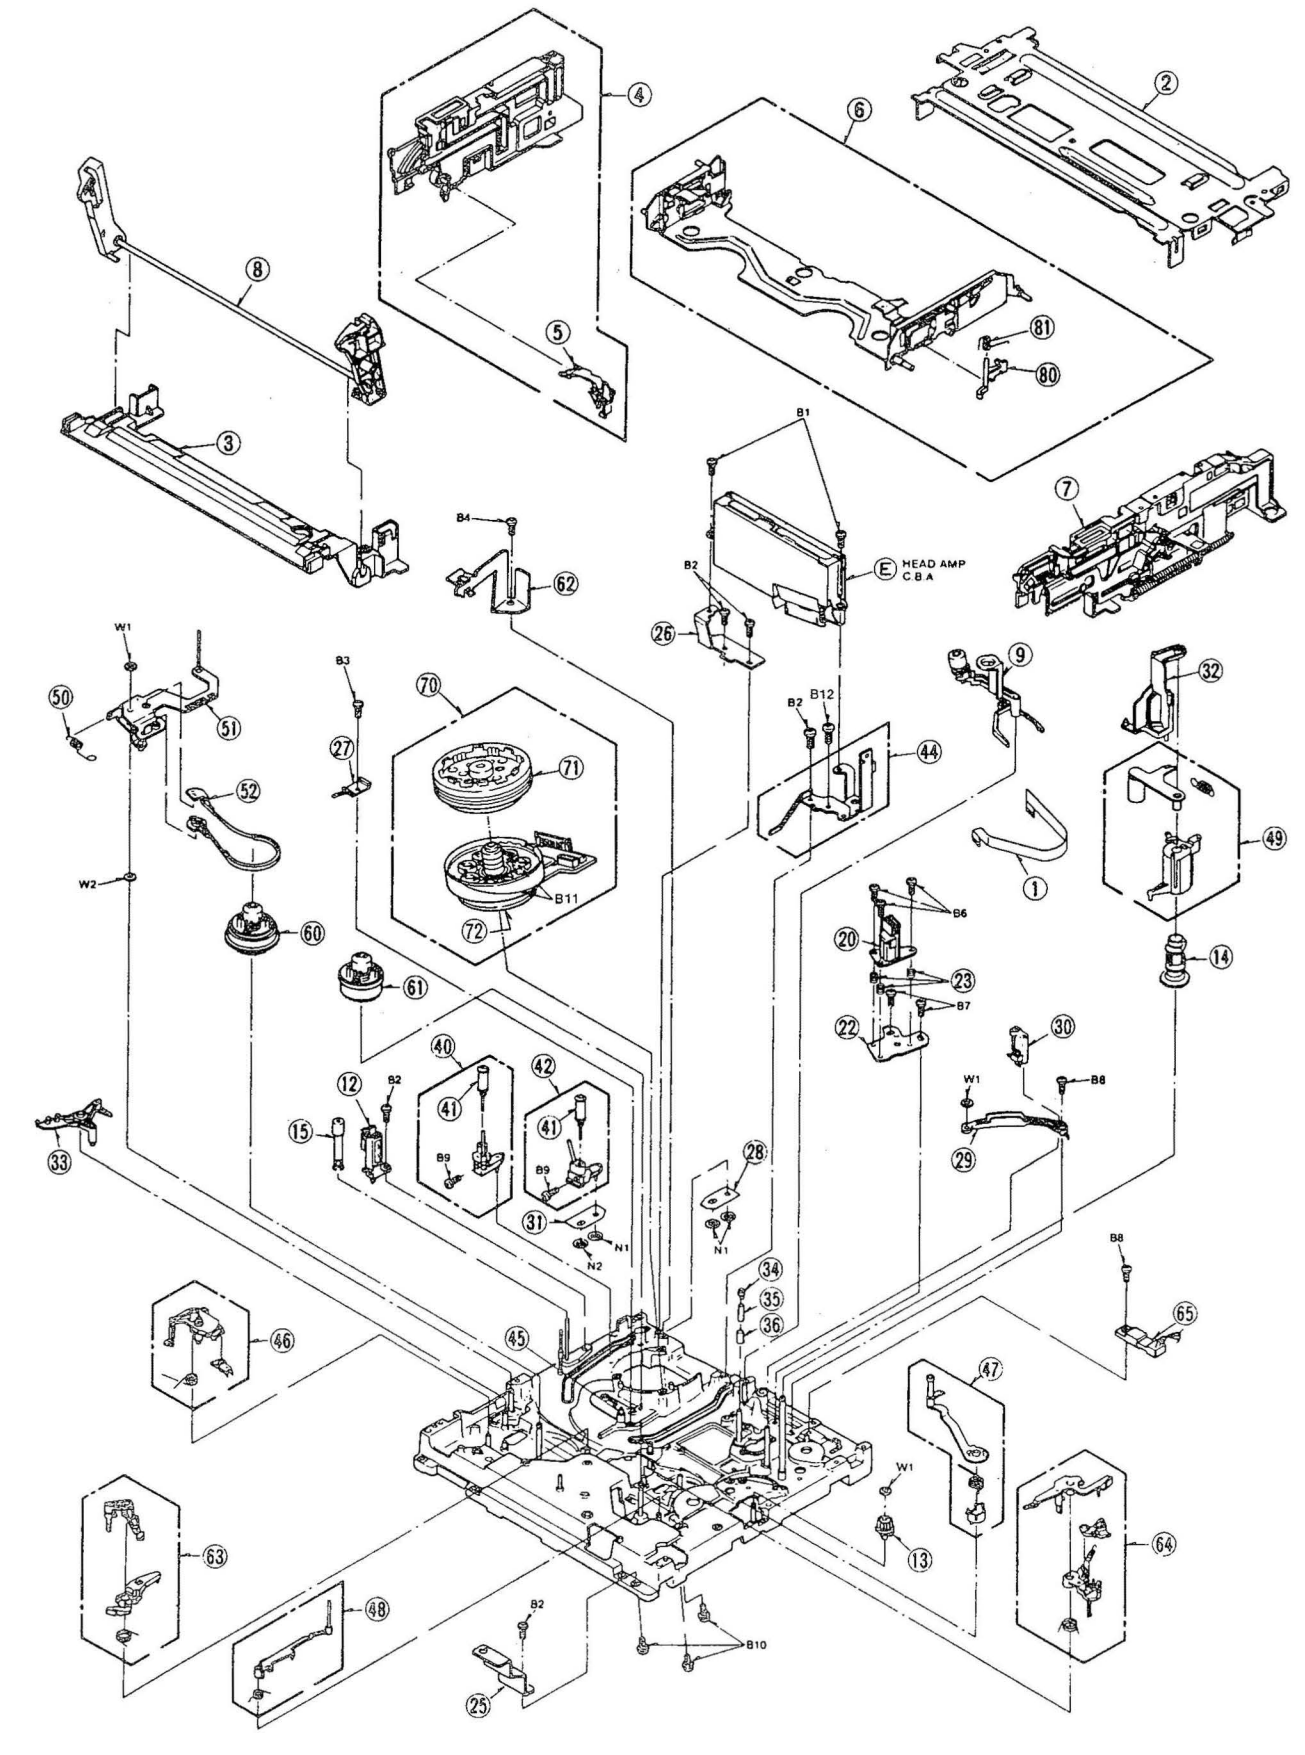

27. ELECTRICAL REPLACEMENT PARTS LIST

27-1. ELECTRICAL REPLACEMENT PARTS FOR NV-HS1000EGC

Note:1.Be sure to make your orders of replacement parts according to this list.
2.IMPORTANT SAFETY NOTICE : Components identified with the mark <!> have the special characteristics for safety. When replacing any of these components,use only the same type.
3.Unless otherwise specified,
All resistors are in OHMS , K=1,000 OHMS. All capacitors are in MICRO-FARADS(uf),P=uuF.
4.The P.C.Board units marked width'■'show below the main assembled parts.
5.The marking(RTL) indicates the retention time is limited for this item. After the discontinuation of this assembly in production, it will no longer be available.

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
		VEP03C01L	MAIN C.B.A.	1	(RTL) INCLUDING THE CAP DRIVE C.B.A. (VEP02412B), LUMINANCE & CHROMINANCE PACK C.B.A.(VEP03A61A), SUB LUMINANCE & CHROMINANCE PACK C.B.A.(VEP03A62A), REC/RF AMP PACK C.B.A. (VEP03A90A), INPUT/OUTPUT PACK C.B.A.(VEP03A72E), SUB AUDIO PACK C.B.A.(VEP04417B), Hi-Fi AUDIO PACK C.B.A.(VEP04447PS), VPS C.B.A. (VEP07538J), DECODER PACK C.B.A. (VEP07671A), TV DEMODULATOR PACK C.B.A.(VEP07801B).
		VEP02412B	CAP DRIVE C.B.A.	1	(RTL) INCLUDED IN MAIN C.B.A.(VEP03C01L).
		VEP03A61A	LUMINANCE & CHROMINANCE PACK C.B.A.	1	(RTL) INCLUDED IN MAIN C.B.A.(VEP03C01L).
		VEP03A62A	SUB LUMINANCE & CHROMINANCE PACK C.B.A.	1	(RTL) INCLUDED IN MAIN C.B.A.(VEP03C01L). INCLUDING THE REC/RF AMP PACK C.B.A. (VEP03A90A).
		VEP03A90A	REC/RF AMP PACK C.B.A.	1	(RTL) INCLUDED IN SUB LUMINANCE & CHROMINANCE PACK C.B.A.(VEP03A62A).
		VEP03A72E	INPUT/OUTPUT PACK C.B.A.	1	(RTL) INCLUDED IN MAIN C.B.A.(VEP03C01L).
		VEP04417B	SUB AUDIO PACK C.B.A.	1	(RTL) INCLUDED IN MAIN C.B.A.(VEP03C01L).
		VEP04447PS	Hi-Fi AUDIO PACK C.B.A.	1	(RTL) INCLUDED IN MAIN C.B.A.(VEP03C01L).
		VEP07538J	VPS C.B.A.	1	(RTL) INCLUDED IN MAIN C.B.A.(VEP03C01L).
		VEP07671A	DECODER PACK C.B.A.	1	(RTL) INCLUDED IN MAIN C.B.A.(VEP03C01L).
		VEP07801B	TV DEMODULATOR PACK C.B.A.	1	(RTL) INCLUDED IN MAIN C.B.A.(VEP03C01L).
		VEP05176L	HEAD AMP C.B.A.	1	(RTL)
		VEP07739X	TIMER C.B.A.	1	(RTL)
		VEP06B45A	VR C.B.A.	1	(RTL)
		VEP03A53A	TBC C.B.A.	1	(RTL)
		VEP01558C	POWER C.B.A.	1	(RTL)<!>
		----------	MECHANISM CONNECTION C.B.A.	1	(RTL)
		VEX0235	CYLINDER DRIVE C.B.A.	1	(RTL)
		----------	MOTOR C.B.A.	1	C.B.A. IS INCLUDED IN LOADING MOTOR (1 UNIT (VEM0427).
		ENG47210G	TUNER	1	<!>
F1101		XBA2C16TH15	FUSE	1	<!>
	■	VEP03C01L	MAIN C.B.A.		(RTL)
C301		ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	
C303		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C305		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C306		ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C307		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C308		ECUM1H050CCN	C.CAPACITOR CH 50V 5P	1	
C309		ECUM1H562KBN	C.CAPACITOR CH 50V 5600P	1	
C310		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C311		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C312		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C313		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C314		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C315,16		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C317		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C318		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C319		ECUM1H080DCN	C.CAPACITOR CH 50V 8P	1	
C321,22		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	2	
C324		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C325,26		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C329		ECQV1H334JM	P.CAPACITOR 50V 0.33U	1	
C331		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C332,33		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C334		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C335		ECEA0JKA220	E.CAPACITOR 6.3V 220U	1	
C336		ECEA1EKN4R7	E.CAPACITOR 25V 4.7U	1	
C337		ECEA1HKN010	E.CAPACITOR 50V 1U	1	
C338		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C339		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C340		ECEA0JKA220	E.CAPACITOR 6.3V 22U	1	
C341		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C342		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C343		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C344		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C345,46		ECEA1CKA100	E.CAPACITOR 16V 10U	2	

ELECTRICAL REPLACEMENT PARTS LIST

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C348		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C349		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C350		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C0701,02		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	2	
C0704		ECUX1H331JCV	C.CAPACITOR CH 50V 330P	1	
C0706		ECEA1HKA0R1	E.CAPACITOR 50V 0.1U	1	
C0707,08		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	2	
C0709		ECUX1H120JCV	C.CAPACITOR CH 50V 12P	1	
C0710		ECUX1H470JPV	C.CAPACITOR CH 50V 47P	1	
C0711		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C0712		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C0714		ECQB1H473JF	P.CAPACITOR 50V 0.047U	1	
C0715		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C0716		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C0717		ECUX1H270JPV	C.CAPACITOR CH 50V 27P	1	
C0718		ECEA1HKAR47	E.CAPACITOR 50V 0.47U	1	
C0719		ECUX1H270JCV	C.CAPACITOR CH 50V 27P	1	
C0720		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C0723		ECEA1HKA0R1	E.CAPACITOR 50V 0.1U	1	
C0726		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C0730		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C0732		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C801		ECUM1H681JCN	C.CAPACITOR CH 50V 680P	1	
C802		ECUM1H471JCN	C.CAPACITOR CH 50V 470P	1	
C803		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C804		ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	
C805,06		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C808		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C809		ECEA1HKA4R7	E.CAPACITOR 50V 4.7U	1	
C810		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C811-13		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C814		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C815		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C816		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C817		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C818		ECEA1HKA0R1	E.CAPACITOR 50V 0.1U	1	
C819		ECQB1H332JZ5	F.CAPACITOR 50V 3300P	1	
C820		ECUM1H331JCN	C.CAPACITOR CH 50V 330P	1	
C821-23		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C824		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C825-27		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C828,29		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	2	
C830		ECUM1H471JCN	C.CAPACITOR CH 50V 470P	1	
C831		ECUM1H270JCN	C.CAPACITOR CH 50V 27P	1	
C832		ECQV1H154JM	P.CAPACITOR 50V 0.15U	1	
C833		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C834		ECUM1H151JCN	C.CAPACITOR CH 50V 150P	1	
C835		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C836		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C1002		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C1003		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C2001		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C2003		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C2005		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C2006		ECEA1HKAR47	E.CAPACITOR 50V 0.47U	1	
C2007		ECQV1H683JM	P.CAPACITOR 50V 0.068U	1	
C2009		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C2010		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C2501-04		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	4	
C2505		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C2506		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C2507		ECQV1H683JM	P.CAPACITOR 50V 0.068U	1	
C2508-10		ECEA1HKA2R2	E.CAPACITOR 50V 2.2U	3	
C2511-14		ECUM1E333KBN	C.CAPACITOR CH 25V 0.033U	4	
C2515		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C2516		ECEA1HKAR22	E.CAPACITOR 50V 0.22U	1	
C2517		ECA0JM221	E.CAPACITOR 6.3V 220U	1	
C2518		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C2519,20		ECUM1E333KBN	C.CAPACITOR CH 25V 0.033U	2	
C2521		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C2522		ECEA1HKNR47	E.CAPACITOR 50V 0.47U	1	
C2523		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C2524,25		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	2	
C2526		ECA0JM221	E.CAPACITOR 6.3V 220U	1	
C2527		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C2528		ECEA1HKNR47	E.CAPACITOR 50V 0.47U	1	
C2529		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C2530		ECEA1HKN010	E.CAPACITOR 50V 1U	1	
C2531		ECUM1E224ZFN	C.CAPACITOR CH 25V 0.22U	1	
C2532		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C2533		ECEA0JKA330	E.CAPACOTOR 6.3V 33U	1	
C2534,35		ERJ6GMZOROO	M.RESISTOR CH 1/10W 0	2	
C3001		ECUM1H471JCN	C.CAPACITOR CH 50V 470P	1	
C3002		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C3003-06		ECEA1HKA010	E.CAPACITOR 50V 1U	4	
C3007,08		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C3009		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C3010		ECA1AM331	E.CAPACITOR 10V 330U	1	
C3011		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C3012		ECA1AM331	E.CAPACITOR 10V 330U	1	
C3013		ECA0JM331	E.CAPACITOR 6.3V 330U	1	
C3014		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C3015		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3016		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3017-19		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	3	
C3022		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3023,24		ECEA1AKA330	E.CAPACITOR 10V 33U	2	
C3027,28		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	2	
C3029		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3030		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3031		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C3032		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3033		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C3301		ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	
C3302		ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	
C3304-08		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	5	
C3309		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3310		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3312-14		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C3321		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3322		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C3323		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3324		ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C3325		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3326		ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C3327,28		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C3329		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3330		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3336		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3338		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3339		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3340		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C3341		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3342		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C3343		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3344		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C3345		ECUM1H391JCN	C.CAPACITOR CH 50V 390P	1	
C3346		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3347		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C3351,52		ECUM1H181JCN	C.CAPACITOR CH 50V 180P	2	
C3353		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C3354		ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
C3372		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C3401		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C3402		ECUM1H080DCN	C.CAPACITOR CH 50V 8P	1	
C3403-07		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	5	
C3408,09		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	2	
C3421		ECUM1H472KBN	C.CAPACITOR CH 50V 4700P	1	
C3422		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3423		ECUM1H050CCN	C.CAPACITOR CH 50V 5P	1	
C3424		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C3425		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3426		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3427		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3428		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3429		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3430		ECEA0JKA330	E.CAPACOTOR 6.3V 33U	1	
C3431		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3443		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3444		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C3445		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3447		ECUM1H121JCN	C.CAPACITOR CH 50V 120P	1	
C3448		ECUM1H151JCN	C.CAPACITOR CH 50V 150P	1	
C3449		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C3450,51		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C3452		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3472		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3473		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3474		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3475-77		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C3501		ECA0JM471	E.CAPACITOR 6.3V 470U	1	
C3502		ECRHA030E54R	TRIMMER 3P	1	
C3503		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3504		ECQB1H223JF	P.CAPACITOR 50V 0.022U	1	
C3505		ECEA1HKN010	E.CAPACITOR 50V 1U	1	
C3506		ECQB1H682JZ	F.CAPACITOR 50V 6800P	1	
C3507		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C3508		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C3509		ECUM1H122KBN	C.CAPACITOR CH 50V 1200P	1	
C3510		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3511		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C3512		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3513		ECUM1H080DCN	C.CAPACITOR CH 50V 8P	1	
C3514,15		ECEA1CKA100	E.CAPACITOR 16V 10U	2	
C3516,17		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	2	
C3518		ECEA1HKAR47	E.CAPACITOR 50V 0.47U	1	
C3519		ECUM1H221JCN	C.CAPACITOR CH 50V 220P	1	
C3520		ECEA1CKA330	E.CAPACITOR 16V 33U	1	
C3521		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3522		ECEA1CKA330	E.CAPACITOR 16V 33U	1	
C3523		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3524		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C3525-27		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C3528		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C3529		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3530		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3531		ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C3532		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3533		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C3534		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3601		ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	
C3602		ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
C3603		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3604		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C3605		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3606		ECUM1H681JCN	C.CAPACITOR CH 50V 680P	1	
C3607		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3608		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C3609		ECUM1H271JCN	C.CAPACITOR CH 50V 270P	1	
C3610		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3611		ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	
C3613		ECUM1H181JCN	C.CAPACITOR CH 50V 180P	1	
C3614		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C3901-05		ECEA1CKA100	E.CAPACITOR 16V 10U	5	
C3906		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3907		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C3908		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3909,10		ECA1AM471	E.CAPACITOR 10V 470U	2	
C3911		ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	
C3912		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C3913		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3914		ECEA1EK3R3	E.CAPACITOR 25V 3.3U	1	
C3915		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C3916		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3917		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C3918		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C3919		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3922		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3923		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C3924		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3927		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C4001,02		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C4003,04		ECEA1CKA100	E.CAPACITOR 16V 10U	2	
C4005		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C4006		ECUM1C224ZFN	C.CAPACITOR CH 16V 0.22U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C4007		ECEA1CPZ101	E.CAPACITOR 16V 100U	1	
C4008		ECUM1C224ZFN	C.CAPACITOR CH 16V 0.22U	1	
C4009		ECEA1CPZ101	E.CAPACITOR 16V 100U	1	
C4010		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C4011,12		ECUM1H122KBN	C.CAPACITOR CH 50V 1200P	2	
C4501		ECQB1H152JZ	F.CAPACITOR 50V 1500P	1	
C4502		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4503		ECUX1H152KBV	C.CAPACITOR CH 50V 1500P	1	
C4504,05		ECEA1CU470	E.CAPACITOR 16V 47U	2	
C4506		ECEA1CU100	E.CAPACITOR 16V 10U	1	
C4507		ECQB1H223JF	P.CAPACITOR 50V 0.022U	1	
C4508		ECEA1EBZ4R7	E.CAPACITOR 25V 4.7U	1	
C4509		ECEA1AU470	E.CAPACITOR 10V 47U	1	
C4510		ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C4511		ECQB1H332JF	P.CAPACITOR 50V 3300P	1	
C4512		ECUX1H561JV	C.CAPACITOR CH 50V 560P	1	
C4513		ECUX1H681JV	C.CAPACITOR CH 50V 680P	1	
C4514		ECUX1H561JV	C.CAPACITOR CH 50V 560P	1	
C4515		ECEA1EU4R7	E.CAPACITOR 25V 4.7U	1	
C4517		ECEA1AU101	E.CAPACITOR 10V 100U	1	
C4518		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4521		ECUM1E473KBN	C.CAPACITOR CH 25V 0.047U	1	
C4522		ECEA1HU3R3	E.CAPACITOR 50V 3.3U	1	
C4528		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4530		ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C4533		ECEA1CU330	E.CAPACITOR 16V 33U	1	
C4537		ECUX1H102JCV	C.CAPACITOR CH 50V 1000P	1	
C4538		ECEA1HUR47	E.CAPACITOR 50V 0.47U	1	
C4539		ECUX1C224ZFV	C.CAPACITOR CH 16V 0.22U	1	
C4541		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4545		ECUX1H102KBV	C.CAPACITOR CH 50V 1000P	1	
C4551		ECQB1H223JF	P.CAPACITOR 50V 0.022U	1	
C4552		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4556		ECEA1CU100	E.CAPACITOR 16V 10U	1	
C4558		ECEA1EBZ4R7	E.CAPACITOR 25V 4.7U	1	
C4559		ECEA1AU470	E.CAPACITOR 10V 47U	1	
C4560		ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C4561		ECQB1H332JF	P.CAPACITOR 50V 3300P	1	
C4562		ECUX1H561JV	C.CAPACITOR CH 50V 560P	1	
C4563		ECUX1H681JV	C.CAPACITOR CH 50V 680P	1	
C4564		ECUX1H561JV	C.CAPACITOR CH 50V 560P	1	
C4565		ECEA1EU4R7	E.CAPACITOR 25V 4.7U	1	
C4567		ECEA1AU101	E.CAPACITOR 10V 100U	1	
C4568		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4572		ECEA1HU3R3	E.CAPACITOR 50V 3.3U	1	
C4576		ECUM1E473KBN	C.CAPACITOR CH 25V 0.047U	1	
C4583		ECEA1CU330	E.CAPACITOR 16V 33U	1	
C4585,86		ECEA1AU101	E.CAPACITOR 10V 100U	2	
C4591		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4592		ECUX1H152KBV	C.CAPACITOR CH 50V 1500P	1	
C4593		ECUX1H102JCV	C.CAPACITOR CH 50V 1000P	1	
C4594,95		ECUX1H471JCV	C.CAPACITOR CH 50V 470P	2	
C4596		ECEA1CU100	E.CAPACITOR 16V 10U	1	
C4597		ECUX1H330JCV	C.CAPACITOR CH 50V 33P	1	
C4598		ECUX1H102JCV	C.CAPACITOR CH 50V 1000P	1	
C4604		ECUM1H182JN	C.CAPACITOR CH 50V 1800P	1	
C4606		ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C4611		ECQB1H182JZ	F.CAPACITOR 50V 1800P	1	
C4613		ECUX1H821JCV	C.CAPACITOR CH 50V 820P	1	
C4616		ECUX1H102ZFV	C.CAPACITOR CH 50V 1000P	1	
C4617		ECEA10M22	E.CAPACITOR 10V 22U	1	
C4618		ECQB1H822JZ	F.CAPACITOR 50V 8200P	1	
C4621		ECEA0JU101	E.CAPACITOR 6.3V 100U	1	
C4629		ECQB1H562JZ	P.CAPACITOR 50V 5600P	1	
C4636		ECUX1H471JV	C.CAPACITOR CH 50V 470P	1	
C4638		ECQB1H822JZ	F.CAPACITOR 50V 8200P	1	
C4652,53		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	2	
C4701		ECCD2H181J	C.CAPACITOR 500V 180P	1	
C4702		ECQP1222JZ	P.CAPACITOR 100V 2200P	1	
C4703		ECQB1H102JF	P.CAPACITOR 50V 1000P	1	
C4704		ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C4705		ECEA16M33	E.CAPACITOR 16V 33U	1	
C4706		ECQV1H104JM	P.CAPACITOR 50V 0.1U	1	
C4707		ECQB1H223JF	P.CAPACITOR 50V 0.022U	1	
C4708		ECEA1CKA100	E.CAPACITOR 16V 10U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C4709		ECQB1H472JF	P.CAPACITOR 50V 4700P	1	
C4710		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C4711,12		ECEA1AKA220	E.CAPACITOR 10V 22U	2	
C4713		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C4714		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C4901,02		ECQB1H103JZ	P.CAPACITOR 50V 0.01U	2	
C4903,04		ECQB1H332JZ	F.CAPACITOR 50V 3300P	2	
C4905,06		VCEA1CAD100	E.CAPACITOR 16V 10U	2	
C4907,08		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
C4909,10		ECQB1H103JZ	P.CAPACITOR 50V 0.01U	2	
C4911,12		ECQB1H332JZ	F.CAPACITOR 50V 3300P	2	
C4913,14		VCEA1CAD100	E.CAPACITOR 16V 10U	2	
C4915,16		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
C4917,18		ECQB1H103JZ	P.CAPACITOR 50V 0.01U	2	
C4919,20		ECQB1H332JZ	F.CAPACITOR 50V 3300P	2	
C4923,24		VCEA0JAC101	E.CAPASITOR 6.3V 100U	2	
C6001		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6002		ECEA0JKA330	E.CAPACITOR 6.3V 33U	1	
C6003		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6004		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C6005		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6006		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C6007,08		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	2	
C6010		ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	1	
C6011		ECUM1H472KBN	C.CAPACITOR CH 50V 4700P	1	
C6012		ECUM1H392KBN	C.CAPACITOR CH 50V 3900P	1	
C6013		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C6014		ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C6015		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C6016,17		ECEA1HKN3R3	E.CAPACITOR 50V 3.3U	2	
C6018		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C6019		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6020		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C6021		ECEA16M10	E.CAPACITOR 16V 1U	1	
C6022		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C6023		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C6024		ECEA1HKA4R7	E.CAPACITOR 50V 4.7U	1	
C6025		ECUM1H392KBN	C.CAPACITOR CH 50V 3900P	1	
C6026		ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	1	
C6027		ECUM1E104KBN	C.CAPACITOR CH 25V 0.1U	1	
C6028		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C6029		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C6030		EECS5R5T224N	E.CAPACITOR 5.5V 0.22U	1	
C6034		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6035		ECEA1CKA330	E.CAPACITOR 16V 33U	1	
C6036		ECEA0JKA330	E.CAPACITOR 6.3V 33U	1	
C6037		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6038		ECEA1AKA470	E.CAPACITOR 10V 47U	1	
C6040		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6041		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C6042		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6043		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C6045		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6046		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6049		ECUM1H271JCN	C.CAPACITOR CH 50V 270P	1	
C6050,51		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	2	
C6053-56		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	4	
C6062		ECUM1H271JCN	C.CAPACITOR CH 50V 270P	1	
C6063		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C7302		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C7303		ECQV1H393JZ	P.CAPACITOR 50V 0.039U	1	
C7304		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C7305		ECQV1H473JZ	P.CAPACITOR 50V 0.047U	1	
C7306		ECQB1H102KZ	P.CAPACITOR 50V 1000P	1	
C7307		ECQB1H822KZ	P.CAPACITOR 50V 8200P	1	
C7308		ECQB1H102KZ	P.CAPACITOR 50V 1000P	1	
C7309		ECQB1H152JH	P.CAPACITOR 50V 1500P	1	
C7310		ECEA16M10	E.CAPACITOR 16V 1U	1	
C7311		ECEA50MR47	E.CAPACITOR 50V 0.47U	1	
C7312		ECQV1H224JM	P.CAPACITOR 50V 0.22U	1	
C7313		ECQV1H104JM	P.CAPACITOR 50V 0.1U	1	
C7314		ECQV1H224JM	P.CAPACITOR 50V 0.22U	1	
C7315		ECQV1H104JM	P.CAPACITOR 50V 0.1U	1	
C7316		ECQV1H224JM	P.CAPACITOR 50V 0.22U	1	
C7317		ECEA1CK101	E.CAPACITOR 16V 100U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C7318		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7319		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C7320,21		ECEA1CK100	E.CAPACITOR 16V 10U	2	
C7323,24		ECQV1H393JZ	P.CAPACITOR 50V 0.039U	2	
C7331		ECQV1H474JM	P.CAPACITOR 50V 0.47U	1	
C7332,33		ECUM1H102ZFN	C.CAPACITOR CH 50V 1000P	2	
C7334		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7335		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C7336		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7337		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C7339		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7340		ECUM1H390JPN	C.CAPACITOR CH 50V 39P	1	
C7341		ECUM1H070DCN	C.CAPACITOR CH 50V 7P	1	
C7342		ECQV1H823JM	P.CAPACITOR 50V 0.082U	1	
C7343		ECEA1CK100	E.CAPACITOR 16V 10U	1	
C7345		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7346		ECUM1H390JPN	C.CAPACITOR CH 50V 39P	1	
C7347		ECUM1H070DCN	C.CAPACITOR CH 50V 7P	1	
C7348		ECQV1H393JZ	P.CAPACITOR 50V 0.039U	1	
C7349,50		ECUM1H221JCN	C.CAPACITOR CH 50V 220P	2	
C7351,52		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C7353		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C7408		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7409		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C7410		ECUM1H563ZFN	C.CAPACITOR CH 50V 0.056U	1	
C7411		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7412		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7413		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C7414		ECUM1H821JCN	C.CAPACITOR CH 50V 820P	1	
C7415		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7416		ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	
C7417		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7418		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C7419		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C7420		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7421		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C7422,23		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C7424		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C7425		ECEA1HKA100	E.CAPACITOR 50V 10U	1	
C7426		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C7427		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7428		ECEA1HKA2R2	E.CAPACITOR 50V 2.2U	1	
C7429		ECEA1CSN100	E.CAPACITOR 16V 10U	1	
C7801		ECQB1H102JH	P.CAPACITOR 50V 1000P	1	
C7802		ECQB1H471JZ	P.CAPACITOR 50V 470P	1	
C7803		ECQB1H472JH	P.CAPACITOR 50V 4700P	1	
C7804		ECQV1H104JM	P.CAPACITOR 50V 0.1U	1	
C7805		ECQB1H472JH	P.CAPACITOR 50V 4700P	1	
C7806		ECQB1H223JH	P.CAPACITOR 50V 0.022U	1	
C7815		VCYE1C104MR1	S.CAPACITOR 16V 0.1U	1	
C7816		ECEA0JKA331	E.CAPACITOR 6.3V 330U	1	
C7851		ECQV1H104JM	P.CAPACITOR 50V 0.1U	1	
C7852		ECEA1CK101	E.CAPACITOR 16V 100U	1	
C7853,54		ECCF1H330JC	C.CAPACITOR 50V 33P	2	
C7855,56		ECEA1HK010	E.CAPACITOR 50V 1U	2	
D301		1SS283	DIODE	1	
D303		MA151WK	DIODE	1	
D305		1SS254	DIODE	1	
D306		MA723VT	DIODE	1	
D307		1SS254	DIODE	1	
D308,09		MA151WK	DIODE	2	
D801-07		1SS254	DIODE	7	
D808		MA151WK	DIODE	1	
D1002		1SS254	DIODE	1	
D2001-05		1SS254	DIODE	5	
D2501-08		1SS254	DIODE	8	
D2510		1SS254	DIODE	1	
D3002		MA28W-A	DIODE	1	
D3003		1SS254	DIODE	1	
D3301		1SS254	DIODE	1	
D3302		MA151K	DIODE	1	
D3304		MA151K	DIODE	1	
D3403		MA723VT	DIODE	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
D3408		1SS254	DIODE	1	
D3501		1SS254	DIODE	1	
D3502		MA153	DIODE	1	
D3504		MA151WK	DIODE	1	
D3901		1SS254	DIODE	1	
D3902		MA4130L	DIODE	1	
D3903		1SS254	DIODE	1	
D3904		MA151WK	DIODE	1	
D3906		MA151WA	DIODE	1	
D3908,09		1SS254	DIODE	2	
D4003		MA723VT	DIODE	1	
D4004		1SS254	DIODE	1	
D4501-04		MA141K	DIODE	4	
D4601,02		MA141K	DIODE	2	
D4701-03		1SS254	DIODE	3	
D6001		1SS254	DIODE	1	
D6002		MA723VT	DIODE	1	
D6003		1SS254	DIODE	1	
D6005		MA151WK	DIODE	1	
D6006		MA151WA	DIODE	1	
D6007		MA151WK	DIODE	1	
D6008		MA151WA	DIODE	1	
D6009		11EQS04	DIODE	1	
D6011,12		11EQS04	DIODE	2	
D6013		MA723VT	DIODE	1	
D6014		1SS254	DIODE	1	
D6015		MA723VT	DIODE	1	
D7303		MA28WA	DIODE	1	
D7304		MA3100L	DIODE	1	
D7402		MA4300M	DIODE	1	
D7851		1SS254	DIODE	1	
DL801		EFDUN124A13N	DELAY	1	
DL802		EFDVR645A45A	DELAY LINE	1	
DL803		VLD0147	DELAY LINE	1	
FL301		ELB4M022	FILTER	1	
FL302		VLF0639	FILTER	1	
FL801		VLF1079	FILTER	1	
FL3001		ELB4H020	FILTER	1	
FL3601		ELB4R031	FILTER	1	
FL3901		VLF1120	FILTER	1	
FL3902		VLF0765	FILTER	1	
IC301		VEFH20B	HIC	1	
IC302		MN3859S	IC	1	
IC303		AN1358S	IC	1	
IC0701		LA7576	IC	1	
IC801		VCR0383	IC	1	
IC802		M52352FP	IC	1	
IC2001		AN3727S	IC	1	
IC2002		UPD4053BG	IC	1	
IC2501		BA6219B	IC	1	
IC2502		LM358PS	IC	1	
IC2503		XRA6439S	IC	1	
IC2504		LM358PS	IC	1	
IC2505		LM393P	IC	1	
IC3001		AN3581S	IC	1	
IC3002		M52055FP	IC	1	
IC3301		M52083FP	IC	1	
IC3401		NJM2233BMA	IC	1	
IC3403		MN155202VZAM	IC	1	
IC3404		MN1280S	IC	1	
IC3405		UPD4066BG	IC	1	
IC3501		LC74760	IC	1	
IC3502		M52055FP	IC	1	
IC3503		NJM2246DA	IC	1	
IC3504		NJM2233BMA	IC	1	
IC3601		AN6308S	IC	1	
IC3901		M52475AP	IC	1	
IC3902		AN3916	IC	1	
IC3904		AN1393S	IC	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
IC4001		NJM4565DD	IC	1	
IC4501		XLH7773AKS	IC	1	
IC4601		BA7755AF	IC	1	
IC4701		AN1358S	IC	1	
IC4702		MN4066BS	IC	1	
IC4901		LA7155M	IC	1	
IC4902		MN4066BS	IC	1	
IC6001		MN6755320H3W	IC	1	
IC6002		M38024V1BN	IC	1	
IC6003		MN1280S	IC	1	
IC6005		UPD4052BG	IC	1	
IC6007		M6M80041P	IC	1	
IC6008		TL431CLP	IC	1	
IC7301		TDA3803A	IC	1	
IC7302		TA8721SN	IC	1	
IC7401		M66006FP	IC	1	
IC7402		LA7217M	IC	1	
IC7801		SAA4700	IC	1	
IC7851		MN158413AH1D	IC	1	
J3901,02		VJS1470	21PIN SKIRT JACK	2	
K2		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
K4		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
K6		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
K0702		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
K0704,05		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
K3010-12		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	3	
K3908		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K6003-05		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	3	
K7404		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K7406-08		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	3	
K7417		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
L302		VLQ0188J180	COIL 18UH	1	
L304		VLQ0188J270	COIL 27UH	1	
L305		VLQ0188J101	COIL 100UH	1	
L306		VLQ0188J390	COIL 39UH	1	
L309-11		VLQ0188J330	COIL 33UH	3	
L312		ELESN121JA	COIL 120UH	1	
L0701,02		ELJNAR10MF	COIL	2	
L0705		VLQ0163J5R6	COIL 5.6UH	1	
L0706		VLQEL05T120	COIL 12UH	1	
L801,02		ELESE681KA	COIL 680UH	2	
L803		ELESN331KA	COIL 330UH	1	
L804		VLQ0407101K	COIL 100UH	1	
L806		VLQ0407101K	COIL 100UH	1	
L807,08		VLQ0188J150	COIL 15UH	2	
L809		VLQ0188J330	COIL 33UH	1	
L810		VLQ0188J150	COIL 15UH	1	
L811		VLQ0188J151	COIL 150UH	1	
L812		VLQ0188J270	COIL 27UH	1	
L813,14		VLQ0188J150	COIL 15UH	2	
L2001		VLQ0569	COIL	1	
L2002		VLQ0556	COIL	1	
L2501		VLP0074	COIL	1	
L2502		ELESE330KA	COIL 33UH	1	
L2503		ELESE102KA	COIL 1000UH	1	
L3001-03		VLQ0188J330	COIL 33UH	3	
L3004		VLQ0398	COIL	1	
L3005-08		VLQ0556	COIL	4	
L3301		VLQ0188J150	COIL 15UH	1	
L3304		VLQ0188J330	COIL 33UH	1	
L3306		VLQ0188J390	COIL 39UH	1	
L3307		VLQ0188J120	COIL 12UH	1	
L3308		VLQ0188J330	COIL 33UH	1	
L3309		VLQ0188J181	COIL 180UH	1	
L3310		VLQ0188J270	COIL 27UH	1	
L3313		ELESE681KA	COIL 680UH	1	
L3315,16		VLQ0188J5R6	COIL 5.6UH	2	
L3318		VLQ0188J330	COIL 33UH	1	
L3323		VLQ0188J330	COIL 33UH	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
L3401		VLQ0188J150	COIL 15UH	1	
L3404		VLQ0188J220	COIL 22UH	1	
L3405		VLQ0188J330	COIL 33UH	1	
L3412		VLQ0188J330	COIL 33UH	1	
L3415		VLQ0188J120	COIL 12UH	1	
L3501		VLQ0188J330	COIL 33UH	1	
L3502		VLQ0188J5R6	COIL 5.6UH	1	
L3503		VLQ0188J100	COIL 10UH	1	
L3504		VLQ0188J390	COIL 39UH	1	
L3505		VLQ0188J820	COIL 82UH	1	
L3508		VLQ0188J330	COIL 33UH	1	
L3601		VLQEL05T120	COIL 12UH	1	
L3602,03		VLQEL05S101K	COIL 100UH	2	
L3604		VLQEL05T151J	COIL 150UH	1	
L3605		VLQEL05S820K	COIL 82UH	1	
L3901-04		ELESE101KA	COIL 100UH	4	
L3906		VLQ0188J1R0	COIL 1UH	1	
L4001,02		ELESE101KA	COIL 100UH	2	
L4501,02		ELESE101KA	COIL 100UH	2	
L4601		VLQEL07F153	COIL	1	
L4701		ELESE471KA	COIL	1	
L4702		ELESE101KA	COIL 100UH	1	
L4901,02		ELESE102KA	COIL 1000UH	2	
L4903,04		ELESE101KA	COIL 100UH	2	
L4905,06		ELESE102KA	COIL 1000UH	2	
L4907,08		ELESE101KA	COIL 100UH	2	
L4909,10		ELESE102KA	COIL 1000UH	2	
L6001		VLP0083	COIL	1	
L6002		ELESE101KA	COIL 100UH	1	
L6003		VLP0083	COIL	1	
L6007,08		VLP0083	COIL	2	
L6009		ELESE101KA	COIL 100UH	1	
L7301		ELESQ102KA	COIL 1000UH	1	
L7407		VLQ0599J1R0	COIL 1UH	1	
L7408-12		VLQ0599J680	COIL 68UH	5	
P1001		VJP2593	CONNECTOR (MALE)	1	
P1002		VJP1142	CONNECTOR (MALE)	1	
P2001		VJP1232T	CONNECTOR (MALE) 5P	1	
P2003		VJP3502	CONNECTOR (MALE)	1	
P2004		VJS3537A015G	CONNECTOR (FEMALE) 15P	1	
P3001		VJS3537A020G	CONNECTOR (FEMALE) 20P	1	
P3002		VJP3233A010	CONNECTOR (MALE) 10P	1	
P3003		VJP1393T	CONNECTOR (MALE) 13P	1	
P4001		VJS2331	CONNECTOR (FEMALE)	1	
P4002		VJP1238T	CONNECTOR (MALE) 11P	1	
P4003		VJP1230T	CONNECTOR (MALE) 3P	1	
P6001		VJS3537A014G	CONNECTOR (FEMALE) 14P	1	
P6003		VJP1233T	CONNECTOR (MALE) 6P	1	
P6004		VJP1235T	CONNECTOR (MALE) 8P	1	
P7401,02		VJS3537A020G	CONNECTOR (FEMALE) 20P	2	
PK0701		VJR0816A010W	CONNECTOR (MALE) 10P	1	
PK4001-03		VJR0757B018T	CONNECTOR (MALE) 18P	3	
PP0701		VJP3589A004B	CONNECTOR (MALE) 4P	1	
PP2001		VJP3042A012W	CONNECTOR (MALE) 12P	1	
PP2002		VJP3042A010W	CONNECTOR (MALE) 10P	1	
PP3001		VJP3042A009W	CONNECTOR (MALE) 9P	1	
PP3002		VJP3042A012W	CONNECTOR (MALE) 12P	1	
PP3003		VJP3042A013W	CONNECTOR (MALE) 13P	1	
PP3011,12		VJP3042A018W	CONNECTOR (MALE) 18P	2	
PP3013		VJP3042A014W	CONNECTOR (MALE) 14P	1	
PP3021-24		VJP3043A012W	CONNECTOR (MALE) 12P	4	
PP3301		VJP3042A011W	CONNECTOR (MALE) 11P	1	
PP4501		VJP3042A017W	CONNECTOR (MALE) 17P	1	
PP7406		VJP3043A010W	CONNECTOR (MALE) 10P	1	
PS1		VJS3043B010W	CONNECTOR (FEMALE) 10P	1	
PS301		VJS3042B009W	CONNECTOR (FEMALE) 9P	1	
PS302		VJS3042B012W	CONNECTOR (FEMALE) 12P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
PS303		VJS3042B013W	CONNECTOR (FEMALE) 13P	1	
PS2001		VJS3042B012W	CONNECTOR (FEMALE) 12P	1	
PS2002		VJS3042B010W	CONNECTOR (FEMALE) 10P	1	
PS3021-24		VJS3043B012W	CONNECTOR (FEMALE) 12P	4	
PS3302,03		VJS3042B018W	CONNECTOR (FEMALE) 18P	2	
PS3501		VJS3042F014W	CONNECTOR (FEMALE) 14P	1	
PS3601		VJS3042B011W	CONNECTOR (FEMALE) 11P	1	
PS4701		VJS3042B017W	CONNECTOR (FEMALE) 17P	1	
PS7301,02		VJR0477	PACK PIN	2	
Q301		MSC2295	TRANSISTOR	1	
Q302		MSB709	TRANSISTOR	1	
Q303,04		MSC2295	TRANSISTOR	2	
Q305		MSD601	TRANSISTOR	1	
Q306		MSC2295	TRANSISTOR	1	
Q307,08		MSB709	TRANSISTOR	2	
Q0701		MSD601-S	TRANSISTOR	1	
Q0702		MSB709	TRANSISTOR	1	
Q801		2SA1022	TRANSISTOR	1	
Q802		MSC2295	TRANSISTOR	1	
Q803		MSB709	TRANSISTOR	1	
Q1001		2SD1996	TRANSISTOR	1	
Q2001,02		MSB709	TRANSISTOR	2	
Q3001		MSD602	TRANSISTOR	1	
Q3002		2SB1322	TRANSISTOR	1	
Q3003		MSD601	TRANSISTOR	1	
Q3004		MSC2295	TRANSISTOR	1	
Q3005,06		MSD601	TRANSISTOR	2	
Q3301,02		MSC2295	TRANSISTOR	2	
Q3304,05		MSD601	TRANSISTOR	2	
Q3401,02		MSC2295	TRANSISTOR	2	
Q3403		MSD601	TRANSISTOR	1	
Q3404		MSC2295	TRANSISTOR	1	
Q3405-07		MSD601	TRANSISTOR	3	
Q3408		MSD602	TRANSISTOR	1	
Q3409		MSB710	TRANSISTOR	1	
Q3410-12		MSD601	TRANSISTOR	3	
Q3422		MSD1328	TRANSISTOR	1	
Q3423		MSD601	TRANSISTOR	1	
Q3424		MSB710	TRANSISTOR	1	
Q3425		MSC2295	TRANSISTOR	1	
Q3426,27		MSD601	TRANSISTOR	2	
Q3501		MSD601	TRANSISTOR	1	
Q3502		MSB709	TRANSISTOR	1	
Q3601		MSD601	TRANSISTOR	1	
Q3602,03		MSC2295	TRANSISTOR	2	
Q3604		MSB709	TRANSISTOR	1	
Q3901,02		2SD1991A	TRANSISTOR	2	
Q3903		MSD1328	TRANSISTOR	1	
Q3904		MSD601	TRANSISTOR	1	
Q3905		MSC2295	TRANSISTOR	1	
Q3906		MSB709	TRANSISTOR	1	
Q3907		MSD601	TRANSISTOR	1	
Q3912		2SD1996	TRANSISTOR	1	
Q3913-15		MSD601	TRANSISTOR	3	
Q3916		MSB710	TRANSISTOR	1	
Q3917		MSD602	TRANSISTOR	1	
Q3918		MSB710	TRANSISTOR	1	
Q4501		2SD655TZ	TRANSISTOR	1	
Q4551		2SB561	TRANSISTOR	1	
Q4552		2SD1819A	TRANSISTOR	1	
Q4601,02		2SD1819A	TRANSISTOR	2	
Q4701		2SD602A-R	TRANSISTOR	1	
Q4702,03		MSD601	TRANSISTOR	2	
Q4704,05		MSB710	TRANSISTOR	2	
Q4706		2SB1378	TRANSISTOR	1	
Q4707		2SD601A	TRANSISTOR	1	
Q4708		2SB1378	TRANSISTOR	1	
Q6001		2SD1991A	TRANSISTOR	1	
Q6002		MSB709	TRANSISTOR	1	
Q6003		2SD1915F	TRANSISTOR	1	
Q6004-06		MSD601	TRANSISTOR	3	
Q6008		2SD1991	TRANSISTOR	1	
Q7301		MSD601-S	TRANSISTOR	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
Q7304,05		MSD601	TRANSISTOR	2	
Q7306		2SC2404-C	TRANSISTOR	1	
Q7307		2SD1328-S	TRANSISTOR	1	
QR301		MRN1402	TRANSISTOR-RESISTOR	1	
QR302		MRN1403	TRANSISTOR-RESISTOR	1	
QR303		MRN1404	TRANSISTOR-RESISTOR	1	
QR304		MRN1402	TRANSISTOR-RESISTOR	1	
QR305		MRN2404	TRANSISTOR-RESISTOR	1	
QR306		XN6213	TRANSISTOR-RESISTOR	1	
QR307		MRN1404	TRANSISTOR-RESISTOR	1	
QR308		MRN1407	TRANSISTOR-RESISTOR	1	
QR309		MRN1402	TRANSISTOR-RESISTOR	1	
QR310		MRN1404	TRANSISTOR-RESISTOR	1	
QR311		MRN2404	TRANSISTOR-RESISTOR	1	
QR312		MRN2402	TRANSISTOR-RESISTOR	1	
QR313,14		MRN1404	TRANSISTOR-RESISTOR	2	
QR315		MRN2404	TRANSISTOR-RESISTOR	1	
QR316,17		XN6213	TRANSISTOR-RESISTOR	2	
QR318		MRN1402	TRANSISTOR-RESISTOR	1	
QR319,20		MRN1404	TRANSISTOR-RESISTOR	2	
QR801,02		MRN1404	TRANSISTOR-RESISTOR	2	
QR803		MRN1403	TRANSISTOR-RESISTOR	1	
QR805		MRN1404	TRANSISTOR-RESISTOR	1	
QR806		XN6213	TRANSISTOR-RESISTOR	1	
QR1001,02		MUN2211	TRANSISTOR-RESISTOR	2	
QR2001		XN1213	TRANSISTOR-TRANSISTOR	1	
QR2002		MUN2113	TRANSISTOR-RESISTOR	1	
QR2501		XN1211	TRANSISTOR-RESISTOR	1	
QR3001,02		MUN2212	TRANSISTOR-RESISTOR	2	
QR3003		MUN2111	TRANSISTOR-RESISTOR	1	
QR3301-04		DTC363EK	TRANSISTOR-RESISTOR	4	
QR3305		UN211D	TRANSISTOR-RESISTOR	1	
QR3306		DTC363EK	TRANSISTOR-RESISTOR	1	
QR3307,08		MRN1404	TRANSISTOR-RESISTOR	2	
QR3402		MRN2402	TRANSISTOR-RESISTOR	1	
QR3403		MRN1403	TRANSISTOR-RESISTOR	1	
QR3404		XN4212	TRANSISTOR-TRANSISTOR	1	
QR3405		MRN1403	TRANSISTOR-RESISTOR	1	
QR3406-08		XN1212	TRANSISTOR-RESISTOR	3	
QR3409,10		MRN1403	TRANSISTOR-RESISTOR	2	
QR3411		MRN1402	TRANSISTOR-RESISTOR	1	
QR3412		MRN1404	TRANSISTOR-RESISTOR	1	
QR3415		XN4212	TRANSISTOR-TRANSISTOR	1	
QR3416		XN1212	TRANSISTOR-RESISTOR	1	
QR3417		XN4212	TRANSISTOR-TRANSISTOR	1	
QR3418		MRN1402	TRANSISTOR-RESISTOR	1	
QR3501		MRN1402	TRANSISTOR-RESISTOR	1	
QR3901-03		MRN1404	TRANSISTOR-RESISTOR	3	
QR3904,05		MRN1402	TRANSISTOR-RESISTOR	2	
QR3906		MRN1404	TRANSISTOR-RESISTOR	1	
QR4001		MUN2212	TRANSISTOR-RESISTOR	1	
QR4002,03		DTC363EK	TRANSISTOR-RESISTOR	2	
QR4004,05		MUN2213	TRANSISTOR-RESISTOR	2	
QR4508,09		UN5113	TRANSISTOR-RESISTOR	2	
QR4510		UN5212	TRANSISTOR-RESISTOR	1	
QR4602		UN5111	TRANSISTOR-RESISTOR	1	
QR4603		UN5213	TRANSISTOR-RESISTOR	1	
QR4701-03		MRN1403	TRANSISTOR-RESISTOR	3	
QR4704		MRN1404	TRANSISTOR-RESISTOR	1	
QR4901		MRN1404	TRANSISTOR-RESISTOR	1	
QR4902		UN211D	TRANSISTOR-RESISTOR	1	
QR6001		MUN2211	TRANSISTOR-RESISTOR	1	
QR6002,03		MUN2111	TRANSISTOR-RESISTOR	2	
QR6004		MUN2211	TRANSISTOR-RESISTOR	1	
QR6009		XN1213	TRANSISTOR-TRANSISTOR	1	
QR6012		MUN2213	TRANSISTOR-RESISTOR	1	
QR6013		MUN2212	TRANSISTOR-RESISTOR	1	
QR6014		MUN2213	TRANSISTOR-RESISTOR	1	
QR6015		MUN2111	TRANSISTOR-RESISTOR	1	
QR7301,02		MRN1404	TRANSISTOR-RESISTOR	2	
QR7312-14		MRN1402	TRANSISTOR-RESISTOR	3	
QR7315,16		MRN1404	TRANSISTOR-RESISTOR	2	
QR7401		MUN2112	TRANSISTOR-RESISTOR	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
QR7403		MUN2214	TRANSISTOR-RESISTOR	1	
QR7405		MUN2213	TRANSISTOR-RESISTOR	1	
QR7851		UN6211	TRANSISTOR-RESISTOR	1	
QR7852		UN6213	TRANSISTOR-RESISTOR	1	
R301		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R303		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R304		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R305		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R306		ERJ6GMZOR00	M.RESISTOR CH 1/10W 0	1	
R307		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R308		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R309		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R310		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R311		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R312		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R313		ERJ6GMYJ361	M.RESISTOR CH 1/10W 360	1	
R314		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R315		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R316		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R317		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R318		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	1	
R319		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R320		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R321		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R322		ERJ6GMYG123	M.RESISTOR CH 1/10W 12K	1	
R323		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R324		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R325		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R326		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R327		ERJ6GMYG432	M.RESISTOR CH 1/10W 4.3K	1	
R328		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R329		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R330		ERJ6GMYG432	M.RESISTOR CH 1/10W 4.3K	1	
R331		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R332		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R333		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R334		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R335		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R336		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R337		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R338,39		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R340		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R341		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R342		ERJ6GMYJ181	M.RESISTOR CH 1/10W 180	1	
R343		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R344		ERJ6GMYJ911	M.RESISTOR CH 1/10W 910	1	
R345		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R346		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R347		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R348		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R349		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R350		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R351		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R352		ERJ6GMYG183	M.RESISTOR CH 1/10W 18K	1	
R353		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R354		ERJ6GMYG753	M.RESISTOR CH 1/10W 75K	1	
R355		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R356		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R357		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R358		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R359		ERJ6GMZOR00	M.RESISTOR CH 1/10W 0	1	
R360,61		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R0702		ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	1	
R0704		ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
R0705		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R0706,07		ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	2	
R0708		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R0709		ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
R0710		ERJ6GEYJ154	M.RESISTOR CH 1/10W 150K	1	
R0713		ERJ3GEYJ331	M.RESISTOR CH 1/16W 330	1	
R0714		ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1	
R0715		ERJ3GEYJ183	M.RESISTOR CH 1/16W 18K	1	
R0716		VRE0040E151	M.RESISTOR CH 1/10W 150	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R0717		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R0718		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R0719		ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R0720		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R0722		ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
R0728		ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R0729		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R0732		ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R0783		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	1	
R801		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R802		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R803		ERJ6GMYJ242	M.RESISTOR CH 1/10W 2.4K	1	
R804,05		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R809		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R810,11		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R814		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R815		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R816		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R817		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R818		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R820		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R821,22		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R824		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R825		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R826		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	1	
R827		ERJ6GMYJ154	M.RESISTOR CH 1/10W 150K	1	
R828		ERJ6GMYJ204	M.RESISTOR CH 1/10W 200K	1	
R829		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R830		ERJ6GMYJ154	M.RESISTOR CH 1/10W 150K	1	
R831		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	1	
R832		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R833		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R834		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R835,36		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	2	
R837		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R838,39		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	2	
R840		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R841		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R842,43		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	2	
R844		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R845		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R846		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R847		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R848		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R849		ERJ6GMYK395	M.RESISTOR CH 1/10W 3.9M	1	
R850		ERJ6GMYJ302	M.RESISTOR CH 1/10W 3K	1	
R851,52		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R853		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R1001		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R1002		ERDS1TJ822	C.RESISTOR 1/2W 8.2K	1	
R2004		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R2005		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R2011		ERJ6GMYG222	M.RESISTOR CH 1/10W 2.2K	1	
R2012		ERJ6GMYG392	M.RESISTOR CH 1/10W 3.9K	1	
R2013,14		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	2	
R2015		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R2016		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R2018		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R2019		ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R2501		ERX1SJ1R8	M.RESISTOR 1W 1.8	1	
R2502		ERJ6GMYG112	M.REISITOR CH 1/10W 1.1K	1	
R2503		ERJ6GMYG102	M.RESISTOR CH 1/10W 1K	1	
R2504		ERJ6GMYG332	M.RESISTOR CH 1/10W 3.3K	1	
R2505		VRE0034E103	M.RESISTOR CH 1/10W 10K	1	
R2506		ERJ6GMYJ564	M.RESISTOR CH 1/10W 560K	1	
R2507		VRE0034E103	M.RESISTOR CH 1/10W 10K	1	
R2508		VRE0034E512	M.RESISTOR CH 1/10W 5.1K	1	
R2509		VRE0034E472	M.RESISTOR CH 1/10W 4.7K	1	
R2510		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R2511		ERJ6GMYJ684	M.RESISTOR CH 1/10W 680K	1	
R2513		ERJ6GMYG133	M.RESISTOR CH 1/10W 13K	1	
R2514		ERJ6GMYG821	M.RESISTOR CH 1/10W 820	1	
R2515		ERG12SJ561	M.RESISTOR 1/2W 560	1	
R2516		ERJ6GMYG473	M.RESISTOR CH 1/10W 47K	1	
R2517		ERX12SJR47	M.RESISTOR 1/2W 0.47	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R2518		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R2519		ERJ6GMYG432	M.RESISTOR CH 1/10W 4.3K	1	
R2520		ERJ6GMYG103	M.RESISTOR CH 1/10W 10K	1	
R2521-23		ERDS2TJ560	C.RESISTOR 1/4W 56	3	
R2524		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R2525		EROS2CKG6800	M.RESISTOR 1/4W 680	1	
R2526		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R2527		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R2528		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R2529		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R2530		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R2531,32		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	2	
R2533		ERJ6GMYJ393	M.RESISTOR CH 1/10W 39K	1	
R2534		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R2535		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R2536		ERJ6GMYJ824	M.RESISTOR CH 1/10W 820K	1	
R2537		ERJ6GMYJ393	M.RESISTOR CH 1/10W 39K	1	
R2538		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R2539		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	1	
R2540		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R2541		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R3001,02		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	2	
R3003		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R3004		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	1	
R3005		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3006,07		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R3008		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3009		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3010		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3011		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3012		ERJ6GMYG911	M.RESISTOR CH 1/10W 910	1	
R3013		ERJ6GMYG102	M.RESISTOR CH 1/10W 1K	1	
R3014		ERJ6GMYG471	M.RESISTOR CH 1/10W 470	1	
R3015		ERJ6GMYG102	M.RESISTOR CH 1/10W 1K	1	
R3016		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3017		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3018		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R3019		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R3021		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3022		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R3023		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R3024		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	1	
R3025		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R3026,27		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R3301		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3302		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R3303		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3304		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R3305		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3306		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R3307		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3308		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3310		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3322		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R3323		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R3324		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3325,26		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R3327		ERJ6GMYJ821	M.RESISTOR CH 1/10W 820	1	
R3328		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3333		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3334		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R3335		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3336,37		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	2	
R3338		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3339		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3340		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3341		ERJ6GMYJ563	M.RESISTOR CH 1/10W 56K	1	
R3342		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R3345-47		ERJ6GMYJ821	M.RESISTOR CH 1/10W 820	3	
R3352		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3353		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3401		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3402		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R3403		ERJ6GMYG361	M.RESISTOR CH 1/10W 360	1	
R3404		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R3405		ERJ6GMYG123	M.RESISTOR CH 1/10W 12K	1	
R3406		ERJ6GMYG512	M.RESISTOR CH 1/10W 5.1K	1	
R3407		ERJ6GMYG272	M.RESISTOR CH 1/10W 2.7K	1	
R3408		ERJ6GMYG302	M.RESISTOR CH 1/10W 3K	1	
R3409		ERJ6GMYG821	M.RESISTOR CH 1/10W 820	1	
R3410		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3411-13		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	3	
R3415		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3417		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3422		ERJ6GMYG333	M.RESISTOR CH 1/10W 33K	1	
R3423		ERJ6GMYG683	M.RESISTOR CH 1/10W 68K	1	
R3424		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3425		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R3426		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R3427		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3428		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R3429		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3430		ERJ6GMYJ823	M.RESISTOR CH 1/10W 82K	1	
R3431		ERJ6GMYG821	M.RESISTOR CH 1/10W 820	1	
R3433		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3434		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3435		ERJ6GMYG302	M.RESISTOR CH 1/10W 3K	1	
R3436		ERJ6GMYG272	M.RESISTOR CH 1/10W 2.7K	1	
R3437		ERJ6GMYG512	M.RESISTOR CH 1/10W 5.1K	1	
R3438		ERJ6GMYG123	M.RESISTOR CH 1/10W 12K	1	
R3441		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R3442		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3443		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R3444,45		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	2	
R3446,47		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R3463		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3464		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3465		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R3466		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3467		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R3468,69		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	2	
R3470		ERJ6GMYG123	M.RESISTOR CH 1/10W 12K	1	
R3471		ERJ6GMYG512	M.RESISTOR CH 1/10W 5.1K	1	
R3472		ERJ6GMYG272	M.RESISTOR CH 1/10W 2.7K	1	
R3473		ERJ6GMYG302	M.RESISTOR CH 1/10W 3K	1	
R3474		ERJ6GMYG821	M.RESISTOR CH 1/10W 820	1	
R3475		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3476		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3477,78		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R3479		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3501		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3502		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R3503		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3504,05		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R3506		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R3507		ERJ6GMYG103	M.RESISTOR CH 1/10W 10K	1	
R3508		ERJ6GMYG332	M.RESISTOR CH 1/10W 3.3K	1	
R3509-11		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	3	
R3513,14		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	2	
R3515		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3516		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3517		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3518		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3519		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3520		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3521		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R3522		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3523		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R3524		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3525		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R3526		ERJ6GMYJ470	M.RESISTOR CH 1/10W 47	1	
R3601		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3602		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3603		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3604		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3605		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R3606		ERJ6GMYJ821	M.RESISTOR CH 1/10W 820	1	
R3607-12		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	6	
R3613		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R3614		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R3616		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3901-05		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	5	
R3906		ERDS1TJ750	C.RESISTOR 1/2W 75	1	
R3908,09		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	2	
R3910,11		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	2	
R3913		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R3914		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	1	
R3915		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R3916,17		ERDS2TJ181	C.RESISTOR 1/4W 180	2	
R3926		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3927,28		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R3929		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3930		ERJ6GMYJ112	M.RESISTOR CH 1/10W 1.1K	1	
R3931		ERJ6GMYJ123	M.RESISTOR CH 1/10W 12K	1	
R3932		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R3933		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R3934		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R3935		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3936		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R3938		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3945		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R3946		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R3950,51		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	2	
R3953		ERDS2TJ562	C.RESISTOR 1/4W 5.6K	1	
R3954		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R3955		ERJ6GMYJ123	M.RESISTOR CH 1/10W 12K	1	
R3956		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R3957-60		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	4	
R3961		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	1	
R3962		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3963		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3964		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R3965		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3966		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3967		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3968		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4001,02		ERDS2TJ680	C.RESISTOR 1/4W 68	2	
R4003-08		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	6	
R4009		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R4010		ERJ6GMYG433	M.RESISTOR CH 1/10W 43K	1	
R4011		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R4012		ERJ6GMYJ242	M.RESISTOR CH 1/10W 2.4K	1	
R4013		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R4014		ERJ6GMYG100	M.RESISTOR CH 1/10W 10	1	
R4015		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R4020		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R4021		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R4022		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R4028		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R4029,30		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R4033		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R4034		ERJ6GMYG393	M.RESISTOR CH 1/10W 39K	1	
R4035		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R4036		ERJ6GMYG393	M.RESISTOR CH 1/10W 39K	1	
R4501,02		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R4503		ERJ3GEYG223	M.RESISTOR CH 1/16W 22K	1	
R4504,05		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	2	
R4506,07		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	2	
R4508		ERJ3GEYG224	M.RESISTOR CH 1/16W 220K	1	
R4509		ERJ3GEYJ622	M.RESISTOR CH 1/16W 6.2K	1	
R4511		ERJ3GEYG273	M.RESISTOR CH 1/16W 27K	1	
R4512		VRE0071E163	M.RESISTOR CH 1/10W 16K	1	
R4513		ERJ3GEYG103	M.RESISTOR CH 1/16W 10K	1	
R4514,15		ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	2	
R4518,19		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R4522		ERJ3GEYJ225	M.RESISTOR CH 1/16W 2.2M	1	
R4527		VRE0071E333	M.RESISTOR 33K	1	
R4528		VRE0071E153	M.RESISTOR 15K	1	
R4529		ERJ3GEYG562	M.RESISTOR CH 1/16W 5.6K	1	
R4530		ERJ3GEYJ334	M.RESISTOR CH 1/16W 330K	1	
R4534		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R4535		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R4539		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R4541		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R4542		ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R4543		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R4551,52		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	2	
R4553,54		ERJ3GEYJ273	M.RESISTOR CH 1/16W 27K	2	
R4558		ERJ3GEYG224	M.RESISTOR CH 1/16W 220K	1	
R4561		ERJ3GEYG273	M.RESISTOR CH 1/16W 27K	1	
R4562		VRE0034E10C	M.RESISTOR CH 1/10W	1	
R4563		ERJ3GEYG272	M.RESISTOR CH 1/16W 2.7K	1	
R4568,69		ERJ3GEYJ273	M.RESISTOR CH 1/16W 27K	2	
R4573		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R4577		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R4578		VRE0071E473	M.RESISTOR CH 1/10W 47K	1	
R4581		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R4583		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R4584		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R4585		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R4586		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R4587,88		ERJ3GEYJ273	M.RESISTOR CH 1/16W 27K	2	
R4591		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R4592		ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1	
R4593		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R4594		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R4596		ERJ3GEYG103	M.RESISTOR CH 1/16W 10K	1	
R4597		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R4598,99		ERJ3GEYG223	M.RESISTOR CH 1/16W 22K	2	
R4603		ERJ3GEYG183	M.RESISTOR CH 1/16W 18K	1	
R4606		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R4610		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R4611		ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
R4612		ERJ3GEYJ331	M.RESISTOR CH 1/16W 330	1	
R4613		ERJ3GEYJ394	M.RESISTOR CH 1/16W 390K	1	
R4615		ERJ3GEYJ133	M.RESISTOR CH 1/16W 13K	1	
R4616		ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
R4638		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R4649		ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1	
R4651		ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
R4652		ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
R4653		ERJ3GEYJ221	M.RESISTOR CH 1/16W 220	1	
R4654		ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
R4655		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R4656		ERJ3GEYG243	M.RESISTOR CH 1/16W 24K	1	
R4657		ERJ3GEYJ392	M.RESISTOR CH 1/16W 3.9K	1	
R4666		ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R4671		ERJ3GEYG103	M.RESISTOR CH 1/16W 10K	1	
R4701		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	1	
R4702		ERJ6GMYJ821	M.RESISTOR CH 1/10W 820	1	
R4703		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R4704,05		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	2	
R4706		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R4707		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R4708		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4709		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R4710		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4711		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R4712		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R4713		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4714		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R4715		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R4716		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4717		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R4718		ERJ6GMYG753	M.RESISTOR CH 1/10W 75K	1	
R4719		ERJ6GMYG203	M.RESISTOR CH 1/10W 20K	1	
R4720,21		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	2	
R4722		ERJ6GMYJ104	M.RESISTOR CH 1/10W 1M	1	
R4723		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R4724,25		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	2	
R4726		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R4901,02		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	2	
R4903,04		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	2	
R4905,06		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	2	
R4907,08		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	2	
R4909,10		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R4915-18		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	4	
R4921		ERJ6GMYG163	M.RESISTOR CH 1/10W 16K	1	
R4922,23		ERJ6GMYG433	M.RESISTOR CH 1/10W 43K	2	
R4924		ERJ6GMYG163	M.RESISTOR CH 1/10W 16K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R4925		ERJ6GMYG473	M.RESISTOR CH 1/10W 47K	1	
R4926		ERJ6GMYG223	M.RESISTOR CH 1/10W 22K	1	
R4927,28		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	2	
R4929		ERJ6GMYG223	M.RESISTOR CH 1/10W 22K	1	
R4930		ERJ6GMYG473	M.RESISTOR CH 1/10W 47K	1	
R4931		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R6001		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6002,03		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	2	
R6004		EROS2CKG2000	M.RESISTOR 1/4W 200	1	
R6005		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R6006		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6007-09		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	3	
R6010,11		ERJ6GMYG223	M.RESISTOR CH 1/10W 22K	2	
R6012		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6013		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6015,16		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6017		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6018		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6019		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6020,21		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6022-24		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	3	
R6025		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R6027		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R6028		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R6029		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R6030		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R6031		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R6032,33		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	2	
R6034		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6035		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R6036		ERJ6GMYJ123	M.RESISTOR CH 1/10W 12K	1	
R6037,38		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R6039,40		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	2	
R6041		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	1	
R6042		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R6044-49		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	6	
R6050		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6051		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R6052		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R6053		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R6054		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R6055		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R6056,57		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	2	
R6058,59		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6060		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6061,62		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	2	
R6063		ERJ6GMYJ224	M.RESISTOR CH 1/10W 220K	1	
R6064		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R6066		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6067		ERJ6GMYJ181	M.RESISTOR CH 1/10W 180	1	
R6068-70		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	3	
R6071		ERDS2TJ391	C.RESISTOR 1/4W 390	1	
R6074		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R6075		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6076		ERJ6GMYJ563	M.RESISTOR CH 1/10W 56K	1	
R6077		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6078		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6079		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6081		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R6082		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6083-86		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	4	
R6087,88		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	2	
R6089,90		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6091		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6092,93		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	2	
R6094,95		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	2	
R6096		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R6097,98		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6099		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R6100		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6101		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6102,03		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	2	
R6104		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R6106,07		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R6108		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R6109		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R6110		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6112		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6113		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R6114		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6116		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6118		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6120		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6122		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6123		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R6124		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6125		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R7302		ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R7303		ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R7304		ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R7305		ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R7306		ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R7307		ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R7308		ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	
R7309		ERDS2TJ102	C.RESISTOR 1/4W 1K	1	
R7310		ERJ6GEYJ474	M.RESISTOR CH 1/10W 470K	1	
R7311		ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R7312		ERJ6GEYJ563	M.RESISTOR CH 1/10W 56K	1	
R7313		ERJ6GEYJ824	M.RESISTOR CH 1/10W 820K	1	
R7314,15		ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	2	
R7316		ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R7317		ERJ6GEYJ393	M.RESISTOR CH 1/10W 39K	1	
R7318		ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R7321		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7322		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R7323		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7324,25		ERJ6GEYJ271	M.RESISTOR CH 1/10W 270	2	
R7329		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R7330		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R7334-37		ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	4	
R7338		ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R7339		ERJ6GEYJ330	M.RESISTOR CH 1/10W 33	1	
R7340		ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R7341		ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R7342		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7345		ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R7346		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R7347		ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R7348		ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R7349		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R7351-53		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	3	
R7354,55		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	2	
R7403		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R7407,08		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R7410-12		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	3	
R7413		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R7414-19		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	6	
R7420		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R7421-23		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	3	
R7425		ERJ6GMYJ154	M.RESISTOR CH 1/10W 150K	1	
R7426		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R7427		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R7428		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R7429		ERJ6GMYJ151	M.RESISTOR CH 1/10W 150	1	
R7430		ERJ6GMYJ104	M.RESISTOR CH 1/10W 1M	1	
R7431-34		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	4	
R7435		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R7436		ERG1SJ222	M.RESISTOR 1W 2.2K	1	
R7437,38		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	2	
R7440,41		ERJ6GMYJ151	M.RESISTOR CH 1/10W 150	2	
R7801		ERDS2TJ472	C.RESISTOR 1/4W 4.7K	1	
R7802		EROS2CKG7502	M.RESISTOR 1/4W 75K	1	
R7803,04		ERDS2TJ103	C.RESISTOR 1/4W 10K	2	
R7805		ERDS2TJ473	C.RESISTOR 1/4W 47K	1	
R7806		EROS2CKG8201	M.RESISTOR 1/4W 8.2K	1	
R7851		ERDS2TJ103	C.RESISTOR 1/4W 10K	1	
R7852		ERDS2TJ332	C.RESISTOR 1/4W 3.3K	1	
RX3401		EXBF8E102J	COMBI. R-R	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
SW3901		VSS0385	SWITCH	1	
T0703		EQV5EC071A	TRANSFORMER	1	
T0704		EQV5EC072A	TRANSFORMER	1	
T4701		VLT0695	TRANSFORMER	1	
T4702		VLT0696	TRANSFORMER	1	
T7301		EIR7QG001B	TRANSFORMER	1	
T7302,03		EIL7QH012Q	TRANSFORMER	2	
T7304		EIS5EC017A	TRANSFORMER	1	
T7305		EQS5EC033A	TRANSFORMER	1	
VR301		EVN49CA00B23	V.RESISTOR 2K	1	
VR302		EVN49CA00B13	V.RESISTOR	1	
VR303		EVNCBAA00B13	V.RESISTOR	1	
VR304		EVN49CA00B13	V.RESISTOR	1	
VR0701		EVNCBAA00B24	V.RESISTOR	1	
VR801,02		EVMEASA00B13	V.RESISTOR	2	
VR803		EVMEASA00B14	V.RESISTOR	1	
VR804		EVN49CA00B53	V.RESISTOR	1	
VR2001-05		EVNCYAA03B54	V.RESISTOR	5	
VR3001-03		EVNCYAA03B23	V.RESISTOR	3	
VR3301		EVMEASA00B24	V.RESISTOR	1	
VR3302		EVN49CA00B54	V.RESISTOR	1	
VR3304,05		EVN49CA00B52	V.RESISTOR 500	2	
VR3307		EVN49CA00B54	V.RESISTOR	1	
VR3901		EVMEASA00B24	V.RESISTOR	1	
VR4002		EVNCYAA03B25	V.RESISTOR	1	
VR4501		EVMECSA00B53	V.RESISTOR	1	
VR4502		EVMEASA00BY4	V.RESISTOR	1	
VR4507		EVMEASA00BY4	V.RESISTOR	1	
VR4509		EVMECSA00BY3	V.RESISTOR	1	
VR4512		EVNCBAA00B52	V.RESISTOR	1	
VR4550		EVMECSA00B14	V.RESISTOR	1	
VR4551,52		EVMEASA00B55	V.RESISTOR	2	
VR7301		EVMEASA00B14	V.RESISTOR	1	
VR7326		EVMEASA00B52	V.RESISTOR	1	
VR7328		EVMEASA00B52	V.RESISTOR	1	
VR7340		EVNCBAA00B14	V.RESISTOR	1	
VR7342		EVNCBAA00B53	V.RESISTOR	1	
VR7344		EVNCBAA00B14	V.RESISTOR	1	
X0701		VLF1178	CRYSTAL OSCILLATOR	1	
X0703		EFCT5R5MW5	CRYSTAL OSCILLATOR	1	
X0704		VLF1035	CRYSTAL OSCILLATOR	1	
X801		VSX0406	CRYSTAL OSCILLATOR	1	
X3302		EF0GC3584A5	CRYSTAL OSCILLATOR	1	
X3501		VSX0574	CRYSTAL OSCILLATOR	1	
X6001		VSX0583	CRYSTAL OSCILLATOR	1	
X6002		EF0EC7374T4E	CRYSTAL OSCILLATOR	1	
X7001		VSQ0565	CRYSTAL OSCILLATOR	1	
X7301,02		EFCT5R5MS5	CRYSTAL OSCILLATOR	2	
X7303,04		EFCT5R74MS5B	CRYSTAL OSCILLATOR	2	
X7305		ELB5A016	CRYSTAL OSCILLATOR	1	
X7401		VSX0561	CRYSTAL OSCILLATOR	1	
X7851		EF0A4R0M03C2	CRYSTAL OSCILLATOR	1	
			MISCELLANEOUS		
		VEE9564	EARTH WIRE	1	(TV DEMODU-POWER
					SHIELD CASE)
		VJH0827	RF ANT TERMINAL PLATE	1	
		ENG47210G	TUNER	1	<!>
		VEE8682	WIRE CABLE	1	(P1001-P1102)
		VEE8683	WIRE CABLE	1	(P1002-P1103)
		VEE8688	WIRE CABLE	1	(P2001-P2902)
		VEE9001	WIRE CABLE	1	(POWER TR.-P2003)
		VEE8685	WIRE CABLE	1	(P4002-P6502)
		VEE8686	WIRE CABLE	1	(P6003-P7504)
		VEE8837	WIRE CABLE	1	(P3002-P7503)
		VEE9669	WIRE CABLE	1	(P4003-P1509)

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
		VEE8834	WIRE CABLE	1	(P3003-P9001)
		VEE8835	WIRE CABLE	1	(P6004-P9002)
		VWJ0775	FLAT CARD CABLE	1	(P2004-P1507)
		VWJ0776	FLAT CARD CABLE	1	(P3001-P501)
		VWJ0778	FLAT CARD CABLE	1	(P7401-P7501)
		VWJ0801	FLAT CARD CABLE	1	(P7402-P7502)
		VMA6768	EARTH ANGLE	1	
		VJF1031	CLAMPER	1	
		VMX2233	SPACER	1	FOR SUB Y/C C.B.A.
		VEJ1438	I/O JACK PLATE	1	FOR I/O PACK C.B.A.
		XTV3+8GFZ	SCREW	4	FOR I/O PACK C.B.A.
		VMP4471	TV DEMODULATOR ANGLE	1	FOR TV DEMODU. C.B.A.
	■	VEP05176L	HEAD AMP C.B.A.		(RTL)
C503		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
C505-08		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	4	
C509		ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	
C510,11		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C512		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C513		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C514		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C515,16		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C517,18		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C519,20		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C521		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C523		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C524		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C525		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C526		VCEA0JAC221	E.CAPACITOR 6.3V 220U	1	
C527		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C531		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C532		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C533,34		ECUM1H121JCN	C.CAPACITOR CH 50V 120P	2	
C535		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C536		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C537		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C538,39		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	2	
C540		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C551		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C552-54		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C555		ECEA0JPK221	E.CAPACTIOR 6.3V 220U	1	
C556,57		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C559		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
C560,61		ECUM1H471JCN	C.CAPACITOR CH 50V 470P	2	
C562,63		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
C564		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
C565		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C566		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C567		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C569		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
IC501		AN3336SB	IC	1	
IC502		AN3370K	IC	1	
IC551		BA7743FS	IC	1	
K501		VLP0145	COIL	1	
K502		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K503,04		VLP0145	COIL	2	
K505		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K506		VLP0145	COIL	1	
K552		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
L501-03		VLQ0540K330	COIL 33UH	3	
L504		VLQ0540J5R6	COIL 5.6UH	1	
L551,52		VLQ0540K330	COIL 33UH	2	
P501		VJS3537B020G	CONNECTOR (FEMALE) 20P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
P502		VJS2603	CONNECTOR (FEMALE)	1	
Q501		MSB709	TRANSISTOR	1	
Q502		MSD601	TRANSISTOR	1	
QR501		MRN2404	TRANSISTOR-RESISTOR	1	
R501		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R502		ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R503		ERJ6GMYG752	M.RESISTOR CH 1/10W 7.5K	1	
R504		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R505		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R506		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R507		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R508		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R509-12		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	4	
R513		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R514		ERJ6GMYJ274	M.RESISTOR CH 1/10W 270K	1	
R517		ERJ6GMYJ100	M.RESISTOR CH 1/10W 10	1	
R518,19		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	2	
R520		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R521,22		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	2	
R523		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R524		VRE0034E182	M.RESISTOR CH 1/10W 1.8K	1	
R525		VRE0034E103	M.RESISTOR CH 1/10W 10K	1	
R526		ERJ6GMYG133	M.RESISTOR CH 1/10W 13K	1	
R551		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R552		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R553		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R554		ERJ6GMYJ243	M.RESISTOR CH 1/10W 24K	1	
R556		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R557		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R558		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R559,60		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	2	
R561		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R562		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R563		VRE0034E100	M.RESISTOR CH 1/10W 10	1	
R564		ERJ6GMYJ224	M.RESISTOR CH 1/10W 220K	1	
R565		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R566		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R567		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	1	
R568		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R569		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R570		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
			MISCELLANEOUS		
		VSC3714	SHIELD COVER (TOP)	1	
		VSC3478	SHIELD COVER (MAIN)	1	
		VSC3715	SHIELD COVER (BOTTOM)	1	
	■	VEP07739X	TIMER C.B.A.		(RTL)
C1701		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C1702		ECUM1H1032FN	C.CAPACITOR CH 50V 0.01U	1	
C1703		ECKD2H471KB	C.CAPACITOR 500V 470P	1	
C1704		ECEA1VKA220	E.CAPACITOR 35V 22U	1	
C1705		ECKF1H103ZF	C.CAPACITOR 50V 0.01U	1	
C1706		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7501		ECRHC030E11	TRIMMER 3P	1	
C7502		ECEA0JKS330	E.CAPACITOR 6.3V 33U	1	
C7503		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7504		ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	1	
C7505,06		ECEA1EKS4R7	E.CAPACITOR 25V 4.7U	2	
C7507,08		ECUM1H473ZFN	C.CAPACITOR CH 50V 0.047U	2	
C7509		ECUM1H060DCN	C.CAPACITOR CH 50V 6P	1	
C7510		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C7511		ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
C7512		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C7513		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C7514,15		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C7517		ECEA0JKS470	E.CAPACITOR 6.3V 47U	1	
C7518		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7519-30		ECUM1H270JCN	C.CAPACITOR CH 50V 27P	12	
C7531,32		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C7533-36		ECUM1H270JCN	C.CAPACITOR CH 50V 27P	4	
C7537		ECEA1HKA220	E.CAPACITOR 50V 22U	1	
C7538		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7539		ECUM1H561JCN	C.CAPACITOR CH 50V 560P	1	
D1701		MA1270-H	DIODE	1	
D1702		MA185	DIODE	1	
D7501		MA3075	DIODE	1	
D7502-06		MA221	DIODE	5	
D7510		MA221	DIODE	1	
D7512		MA221	DIODE	1	
D7514		MA221	DIODE	1	
D7517,18		MA221	DIODE	2	
D7520		MA221	DIODE	1	
D7522		MA221	DIODE	1	
D7526		MA221	DIODE	1	
D7531,32		MA221	DIODE	2	
D7534,35		MA221	DIODE	2	
D7546-53		MA221	DIODE	8	
D7556,57		LN81RCPHL	LED	2	
D7559,60		LN81RCPHL	LED	2	
D7562,63		MA221	DIODE	2	
DP7501		VSL0276	DISPLAY TUBE	1	
IC7501		M37502V4CF	IC	1	
IC7502		PST7026	IC	1	
IC7503		XLJ9021B	IC	1	
IC7504		PST7043	IC	1	
IC7505		BA6810S	IC	1	
K7502		ERJ6GMZOR00	M.RESISTOR CH 1/10W 0	1	
K7504,05		ERJ6GMZOR00	M.RESISTOR CH 1/10W 0	2	
L7501		VLQEL05S101K	COIL 100UH	1	
L7502		VLQ0188J330	COIL 33UH	1	
P7501,02		VJS3537A020G	CONNECTOR (FEMALE) 20P	2	
P7503		VJP3234B010	CONNECTOR (MALE) 10P	1	
P7504		VJP1246T	CONNECTOR (MALE) 6P	1	
P7505,06		VJS2183	CONNECTOR (FEMALE)	2	
PP7501,02		VJP3405A011W	CONNECTOR (MALE) 11P	2	
Q1701		2SD1994A	TRANSISTOR	1	
Q7501,02		MSD601	TRANSISTOR	2	
QR7501,02		MRN2403	TRANSISTOR-RESISTOR	2	
QR7503		MRN2402	TRANSISTOR-RESISTOR	1	
QR7506		MRN1402	TRANSISTOR-RESISTOR	1	
QR7507		MRN1404	TRANSISTOR-RESISTOR	1	
QR7508-11		MRN2404	TRANSISTOR-RESISTOR	4	
QR7512-14		MRN2403	TRANSISTOR-RESISTOR	3	
R1701		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R1702		ERDS2TJ101	C.RESISTOR 1/4W 100	1	
R1703		ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R7501,02		ERJ6GEYJ820	M.RESISTOR CH 1/10W 82	2	
R7503		ERJ6GEYG223	M.RESISTOR CH 1/10W 22K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R7504		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R7505-07		ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	3	
R7508		ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R7509		ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	1	
R7510		ERJ6GEYK106	M.RESISTOR CH 1/10W 10M	1	
R7511		ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	1	
R7512,13		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R7514-16		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	3	
R7517,18		ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	2	
R7519-22		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	4	
R7525,26		ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	2	
R7528,29		ERJ6GMZOR00	M.RESISTOR CH 1/10W 0	2	
R7531-41		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	11	
R7542-56		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	15	
R7557-59		ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	3	
R7560-62		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	3	
R7564		ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R7565		ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R7566		ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R7567		ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R7568		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7569		ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R7570		ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R7571		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7572		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R7573		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7574		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
RX7501,02		EXBF6E104J	RESISTOR-RESISTOR	2	
RX7503		EXBF8E104J	COMBI.R-R 100K	1	
SW7502,03		ESD172355	SWITCH	2	
SW7504-07		ESD172255	SWITCH	4	
SW7508,09		ESD172355	SWITCH	2	
SW7510		ESD172255	SWITCH	1	
T1701		ETE13K80AY	TRANSFORMER	1	
VR4004		EVNCBAA00B53	V.RESISTOR	1	
X7501		VSX0506	CRYSTAL OSCILLATOR	1	
X7502		VSX0094	CRYSTAL OSCILLATOR	1	
			MISCELLANEOUS		
		VMD0504	LED HOLDER	4	
		VJF1043	FIP HOLDER	1	
	■	VEP06B45A	VR C.B.A.		(RTL)
C6501,02		ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	2	
C6503,04		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C6505		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C6506		VCEA1HAC3R3	E.CAPACITOR 50V 3.3U	1	
C6507		ECEA1AKA330	E.CAPACITOR 10V 33U	1	
C6508		ECEA1CKA330	E.CAPACITOR 16V 33U	1	
C6509		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6510		ECEA0JK470	E.CAPACITOR 6.3V 47U	1	
C6511-14		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	4	
C6515,16		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
C6518		ECUM1H472KBN	C.CAPACITOR CH 50V 4700P	1	
C6519		ECKF1H472KB	C.CAPACITOR 50V 4700P	1	
IC6501		VCR0172	IC	1	
IR6501		VEK6407	IR RECEIVER UNIT	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
L6501,02		ELESE471KA	COIL	2	
L6503,04		ELESE221KA	COIL 220UH	2	
L6506,07		ELESE101KA	COIL 100UH	2	
LB6501		VLP0145	COIL	1	
LB6502		VLP0150	INDUCTOR	1	
P6502		VJP1251T	CONNECTOR (MALE) 11P	1	
PS6501,02		VJS3405A011A	CONNECTOR (FEMALE) 11P	2	
R6501		ERJ6GEYG332	M.RESISTOR CH 1/10W 3.3K	1	
R6502		ERJ6GEYG331	M.RESISTOR CH 1/10W 330	1	
R6503,04		ERJ6GEYG271	M.RESISTOR CH 1/10W 270	2	
R6505		ERJ6GEYG332	M.RESISTOR CH 1/10W 3.3K	1	
R6506		ERJ6GEYG331	M.RESISTOR CH 1/10W 330	1	
R6508,09		ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	2	
R6511		ERDS2TYJ470	C.RESISTOR	1	
S6501,02		EVQ11409K	SWITCH	2	
VR6501		EWAKABX15C23	V.RESISTOR	1	
VR6502		EWAKFKX15B24	V.RESISTOR	1	
VR6503		EWANYJX1054J	V.RESISTOR	1	
			MISCELLANEOUS		
		VEJ1429	FRONT JACK	1	
		VYC0599	HIFI REC VR COVER UNIT	1	
		VGU4495	HIFI REC VR KNOB	2	
	■	VEP03A53A	TBC C.B.A.		(RTL)
C9001		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9002		ECQB1H473JZ	F.CAPACITOR 50V 0.047U	1	
C9003		ECEA1HKN010	E.CAPACITOR 50V 1U	1	
C9004		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C9005		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9006		ECEA1HKAR47	E.CAPACITOR 50V 0.47U	1	
C9007		ECQB1H473JZ	F.CAPACITOR 50V 0.047U	1	
C9008		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9009		ECQB1H473JZ	F.CAPACITOR 50V 0.047U	1	
C9010		ECEA1EKA4R7	E.CAPACITOR 25V 4.7U	1	
C9011		ECQB1H333KZ	F.CAPACITOR 50V 0.033U	1	
C9012		ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	
C9013		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C9014		ECEA1HKAR47	E.CAPACITOR 50V 0.47U	1	
C9015		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9016		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C9017		ECQB1H223KF	P.CAPACITOR 50V 0.022U	1	
C9018		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C9019		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9020,21		ECEA1HKA2R2	E.CAPACITOR 50V 2.2U	2	
C9022		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9023		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9024		ECEA1EKA4R7	E.CAPACITOR 25V 4.7U	1	
C9025		ECUM1H152KBN	C.CAPACITOR CH 50V 1500P	1	
C9026		ECUM1H331JCN	C.CAPACITOR CH 50V 330P	1	
C9027		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9028		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9029		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9030		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9031,32		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C9033		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C9034		ECUM1H270JCN	C.CAPACITOR CH 50V 27P	1	
C9035		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9036,37		ECEA1EKN4R7	E.CAPACITOR 25V 4.7U	2	
C9038		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9039		ECEA0JKA220	E.CAPACITOR 6.3V 220U	1	
C9040		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9041		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9042		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9043-50		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	8	
C9051		ECEA0JKA220	E.CAPACITOR 6.3V 220U	1	
C9052		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9054		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9055		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9056		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9057		ECEA0JKA220	E.CAPACITOR 6.3V 220U	1	
C9058		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9059		ECEA0JKA220	E.CAPACITOR 6.3V 220U	1	
C9060		ECUM1H050CCN	C.CAPACITOR CH 50V 5P	1	
C9061		ECUM1H020CCN	C.CAPACITOR CH 50V 2P	1	
C9062		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C9063		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C9064		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9065		ECUM1H682KBN	C.CAPACITOR CH 50V 6800P	1	
C9066		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9067-70		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	4	
C9071		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9072		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9073		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9076		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9077		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9078		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9079		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9080		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9081,82		ECEA0JKA470	E.CAPACITOR 6.3V 47U	2	
C9083,84		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C9085,86		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C9087		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9088		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9089		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9098-00		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C9101		ECEA0JKA220	E.CAPACITOR 6.3V 220U	1	
C9102		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9103		ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	
C9501		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9502,03		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	2	
C9504		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C9505		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9506		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C9507,08		ECEA1CKA100	E.CAPACITOR 16V 10U	2	
C9509,10		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C9511		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C9512		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9513		ECEA1HKAR22	E.CAPACITOR 50V 0.22U	1	
C9514		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9515		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9516		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C9517		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C9518		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C9519		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9520-22		ECEA1CKA100	E.CAPACITOR 16V 10U	3	
C9523,24		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C9525,26		ECEA1CKA100	E.CAPACITOR 16V 10U	2	
D9501		1SS254	DIODE	1	
FL9001-05		VLF0633	FILTER	5	
FL9006		VLF0634	FILTER	1	
FL9007		ELKAW103EB	FILTER	1	
FL9008		VLF0634	FILTER	1	
FL9009		VLF0839	FILTER	1	
FL9010		VLF0838	FILTER	1	
FL9011		VLF0874	FILTER	1	
FL9012		VLF0855	FILTER	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
FL9013		ELB4P034	FILTER	1	
FL9014		VLF0875	FILTER	1	
FL9015-18		VLF0634	FILTER	4	
FL9019-21		VLF0630	FILTER	3	
FL9022-26		ELKAW103EB	FILTER	5	
FL9501		ELB4H054	FILTER	1	
IC9001		AN3942SB	IC	1	
IC9002		AN3496S	IC	1	
IC9003		MN74HC4066S	IC	1	
IC9004		HA19211BNT	IC	1	
IC9006		AN3915S	IC	1	
IC9007		SC371020FU	IC	1	
IC9008		SC371026FU	IC	1	
IC9501		CXL1009P	IC	1	
IC9502		AN78L09	IC	1	
IC9503		M52055FP	IC	1	
K9001		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K9004		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K9006,07		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	2	
K9010,11		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	2	
K9014		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K9016		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K9018,19		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	2	
L9001		VLQEL05S220J	COIL 22UH	1	
L9002,03		ELESE101K	COIL 100UH	2	
L9004		ELESN680KA	COIL 680UH	1	
L9005		ELESN270KA	COIL 27UH	1	
L9006		VLQ0188J2R2	COIL 2.2UH	1	
L9007		ELESE101K	COIL 100UH	1	
L9008,09		VLQ0188J2R2	COIL 2.2UH	2	
L9010		VLQ0188J6R8	COIL 6.8UH	1	
L9011-14		VLQ0188J2R2	COIL 2.2UH	4	
L9018,19		VLP0054	COIL	2	
L9024		VLP0054	COIL	1	
L9501		ELESE101K	COIL 100UH	1	
L9502		VLP0054	COIL	1	
L9503		VLP0053	COIL	1	
L9504,05		ELESE101K	COIL 100UH	2	
L9506		VLP0054	COIL	1	
P9001		VJP1393T	CONNECTOR (MALE) 13P	1	
P9002		VJP1235T	CONNECTOR (MALE) 8P	1	
Q9001		MSB709	TRANSISTOR	1	
Q9003,04		MSD601	TRANSISTOR	2	
Q9006-09		MSD601	TRANSISTOR	4	
Q9010,11		MSB709	TRANSISTOR	2	
Q9012		MSD601	TRANSISTOR	1	
Q9013		MSB709	TRANSISTOR	1	
Q9014		2SA1022	TRANSISTOR	1	
Q9015		MSD601	TRANSISTOR	1	
Q9016		MSC2295	TRANSISTOR	1	
Q9017		MSD601	TRANSISTOR	1	
Q9018		MSB709	TRANSISTOR	1	
Q9019		MSD601	TRANSISTOR	1	
Q9020		MSC2295	TRANSISTOR	1	
Q9021		MSD601	TRANSISTOR	1	
Q9022		MSB709	TRANSISTOR	1	
Q9023		MSD601	TRANSISTOR	1	
Q9024		MSB709	TRANSISTOR	1	
Q9025		MSD601	TRANSISTOR	1	
Q9026,27		MSB709	TRANSISTOR	2	
Q9501,02		MSC2295	TRANSISTOR	2	
Q9503		MSB709	TRANSISTOR	1	
Q9504		MSD601	TRANSISTOR	1	
Q9505		MSB709	TRANSISTOR	1	
Q9506		MSD601	TRANSISTOR	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
Q9507		MSB709	TRANSISTOR	1	
QR9001		MRN1404	TRANSISTOR-RESISTOR	1	
QR9004		MRN1404	TRANSISTOR-RESISTOR	1	
QR9007		MRN1404	TRANSISTOR-RESISTOR	1	
QR9010		MRN1404	TRANSISTOR-RESISTOR	1	
R9001-04		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	4	
R9005		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9006		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R9007,08		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R9009		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R9010-17		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	8	
R9021-23		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	3	
R9024		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R9027-29		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	3	
R9030		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	1	
R9031		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R9032		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R9037		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R9038		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R9039		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R9040		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	1	
R9041		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R9042		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R9043		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9044		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	1	
R9045		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9046		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R9047,48		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R9049		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	1	
R9050		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R9051,52		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	2	
R9053		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R9054,55		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	2	
R9056		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R9057		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R9058		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R9059,60		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R9061		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	1	
R9062		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R9063		ERJ6GMYJ202	M.RESISTOR CH 1/10W 2K	1	
R9064		ERJ6GMYJ132	M.RESISTOR CH 1/10W 1.3K	1	
R9065		ERJ6GMYJ432	M.RESISTOR CH 1/10W 4.3K	1	
R9066		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	1	
R9067		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R9068-70		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	3	
R9071		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R9072		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R9073		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9074		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R9075		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9076		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R9077		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R9078		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R9079		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R9080,81		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R9082		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R9084		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9087		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R9088		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R9093		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R9094		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9095		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R9096		ERJ6GMYJ123	M.RESISTOR CH 1/10W 12K	1	
R9097		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R9098		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R9099		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R9100,01		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R9104		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R9105		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R9106		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R9107		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R9108,09		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R9501,02		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	2	
R9503,04		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R9505		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R9506		ERJ6GMYJ224	M.RESISTOR CH 1/10W 220K	1	
R9507		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	1	
R9508		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R9509-13		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	5	
R9514,15		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	2	
R9516		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9517,18		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	2	
R9519		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R9520		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
VR9001		EVMF6SA00B23	V.RESISTOR 2K	1	
VR9002		EVNCYAA03B54	V.RESISTOR	1	
VR9003		EVMF6SA00B13	V.RESISTOR	1	
VR9004		EVNCYAA03B24	V.RESISTOR	1	
VR9005,06		EVMF6SA00B14	V.RESISTOR 10K	2	
VR9007		EVMF6SA00B13	V.RESISTOR	1	
VR9501		EVMF6SA00B23	V.RESISTOR 2K	1	
X9002		VSX0617	CRYSTAL OSCILLATOR	1	
X9501		VSX0323	CRYSTAL OSCILLATOR	1	
			MISCELLANEOUS		
		VSC4116	SHIELD COVER (MAIN)	1	
		VSC3620	SHIELD COVER (BOTTOM)	1	
		VSC3618	SHIELD COVER (TOP)	1	
		XTN3+6F-C	SCREW	4	
		VMX1921	SPACER	1	
	■	VEP01558C	POWER C.B.A.		(RTL) <!>
C1103		VCC0021	C.CAPACITOR	1	<!>
C1106		VCC0021	C.CAPACITOR	1	<!>
C1109		VCC0023	C.CAPACITOR	1	<!>
C1110		ECQU2A224MN	P.CAPACITOR 250V 0.22U	1	<!>
C1111		ECQU2A154MNB	P.CAPACITOR 250V 0.15U	1	<!>
C1112		ECEC2GG680	E.CAPACITOR 400V 68U	1	
C1113		ECQE6473KF	P.CAPACITOR 630V 0.047U	1	
C1114		VCK0106K121	C.CAPACITOR	1	
C1115		ECA1VXLV470	E.CAPACITOR 35V 47U	1	
C1116		ECA1CXLV101	E.CAPACITOR 16V 100U	1	
C1117		ECKF1H102KB	C.CAPACITOR 50V 1000P	1	
C1118		ECKF1H271KB	C.CAPACITOR 50V 270P	1	
C1121		ECCD2H101J	C.CAPACITOR 500V 100P	1	
C1123		ECEA1JFE560	E.CAPACITOR 63V 56U	1	
C1124		ECEA1CFE331	E.CAPACITOR 16V 330U	1	
C1125		ECEA1DFZ681	E.CAPACITOR 20V 680U	1	
C1126		ECEA1AFZ681	E.CAPACITOR 10V 680U	1	
C1127		ECEA1JFE470	E.CAPACITOR 63V 47U	1	
C1128		ECEA1CFE121	E.CAPACITOR 16V 120U	1	
C1129		ECEA1DFZ681	E.CAPACITOR 20V 680U	1	
C1130		ECEA1AFZ681	E.CAPACITOR 10V 680U	1	
C1131-34		ECKF1H102ZF	C.CAPACITOR 50V 1000P	4	
C1135,36		ECA1CGE101X	E.CAPACITOR 16V 100U	2	
C1139		ECKF1H103ZF	C.CAPACITOR 50V 0.01U	1	
C1140,41		ECA1CGE101X	E.CAPACITOR 16V 100U	2	
D1102		EM1B	DIODE	1	<!>
D1103		AP01C	DIODE	1	
D1104		MA178	DIODE	1	
D1105		1SS254	DIODE	1	
D1106		MA4200H	DIODE	1	
D1107		MA723VT	DIODE	1	
D1108		10ELS2	DIODE	1	
D1109		MA185	DIODE	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
D1110		FMLG12SP	DIODE	1	
D1111		FMBG14L	DIODE	1	
D1112		SV03YS	DIODE	1	
D1115-17		EM1B	DIODE	3	<!>
D1118		MA4056-L	DIODE	1	
D1119		1SS254	DIODE	1	
D1120		MA4120H	DIODE	1	
D1121,22		1SS254	DIODE	2	
IC1101		STRM6547LF	IC	1	<!>
IC1103		SI3120C	IC	1	
IC1104		SI-3050CA	DIODE	1	
L1101,02		ELF18D221F	COIL	2	<!>
L1103-09		EXCELSA35	COIL	7	
L1110		VLP0074	COIL	1	
L1111,12		ELESE101KA	COIL 100UH	2	
L1113,14		ELC07B009	COIL	2	
L1115,16		VLP0083	COIL	2	
P1101		VJS2625	AC INLET	1	<!>
P1102		VJP1930T	CONNECTOR (MALE)	1	
P1103		VJP1149	CONNECTOR (MALE) 3P	1	
Q1101		PC120FY	TRANSISTOR	1	<!>
Q1102		2SD1996-R	TRANSISTOR	1	
R1101		ERC12AGM334	S.RESISTOR 1/2W 330K	1	
R1102		VRE0087	M.RESISTOR 1/16W	1	
R1103		ERG3SJ823	M.RESISTOR 1/16W 82K	1	
R1104,05		ERDS2FJ224	C.RESISTOR 1/4W 220K	2	
R1106		ERDS2FJ221	C.RESISTOR 1/4W 220	1	
R1109		ERDS2FJ561	C.RESISTOR 1/4W 560	1	
R1110		ERDS2FJ391	C.RESISTOR 1/4W 390	1	
R1111		ERX1SJ1R5	M.RESISTOR 1W 1.5	1	
R1112		ERDS2FJ103	C.RESISTOR 1/4W 10K	1	
R1113		ERDS2FJ682	C.RESISTOR 1/4W 6.8K	1	
R1114		ERDS2FJ101	C.RESISTOR 1/4W 100	1	
R1115		ERDS2TJ271	C.RESISTOR 1/4W 270	1	
R1122		EROS2CKG62R0	M.RESISTOR 1/4W 62	1	
R1123		EROS2CKG3001	M.RESISTOR 1/4W 3K	1	
R1124		EROS2CKG20R0	M.RESISTOR 1/4W 20	1	
R1125		EROS2CKG1201	M.RESISTOR 1/4W 1.2K	1	
R1126		ERDS1TJ562	C.RESISTOR 1/2W 5.6K	1	
R1127		ERDS2FJ224	C.RESISTOR 1/4W 220K	1	
T1101		VLT0718	TRANSFORMER	1	<!>
			MISCELLANEOUS		
		VJF0318	FUSE HOLDER	2	<!>
		VMZ2212	CAPACITOR COVER	3	<!>
	■	----------	MECHANISM CONNECTION C.B.A.		(RTL)
D1501		LN59L.VT	LED	1	
IC1501,02		ON1387	PHOTO INTERRUPTER	2	
P1503		VJS3316A002	CONNECTOR (FEMALE) 2P	1	
P1504		VJS3820	CONNECTOR (FEMALE)	1	
P1505		VJS3537B014G	CONNECTOR (FEMALE) 14P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
Q1501		PT493F1MN	TRANSISTOR	1	
Q1502		PN205L-NC.VT	PHOTO TRANSISTOR	1	
SW1501		VES0695	S-TAB SW	1	
SW1502		VST0176	S-VHS CASSETTE SW	1	
			MISCELLANEOUS		
		VMD2029	REEL GUIDE	1	
		VMD1926	LED HOLDER	1	D1501
		VMD1927	PHOTO TR. HOLDER	1	Q1502
	■	VEX0235	CYLINDER DRIVE C.B.A.		(RTL)
C2901-03		ECEA1VSN2R2	E.CAPACITOR 35V 2.2U	3	
C2904-06		ECUM1E104KBM	C.CAPACITOR CH 25V 0.1U	3	
C2907		ECUM1E683KBM	C.CAPACITOR CH 25V 0.068U	1	
C2908		ECUM1E473KBM	C.CAPACITOR CH 25V 0.047U	1	
C2910		ECEA1CKS100	E.CAPACITOR 16V 10U	1	
C2912		ECEA0JKS220	E.CAPACITOR 6.3V 22U	1	
IC2901		AN3815K	IC	1	
P2901		VJP2603W	CONNECTOR (MALE) 12P	1	
P2902		VJP1232T	CONNECTOR (MALE) 5P	1	
R2901		ERX12SJR47	M.RESISTOR CH 1/2W 0.47	1	
TH2901		VRH0017	THERMISTOR	1	
			MISCELLANEOUS		
		VMA9138	MAIN HOLDER	1	
	■	----------	MOTOR C.B.A.		
			MISCELLANEOUS		
		VJP3316B002	CONNECTOR (FEMALE) 2P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks

27-2. ELECTRICAL REPLACEMENT PARTS FOR NV-HS1000BYP

Note:
1. Be sure to make your orders of replacement parts according to this list.
2. IMPORTANT SAFETY NOTICE : Components identified with the mark <!> have the special characteristics for safety. When replacing any of these components,use only the same type.
3. Unless otherwise specified, All resistors are in OHMS , K=1,000 OHMS. All capacitors are in MICRO-FARADS(uf),P=uuF.
4. The P.C.Board units marked width'■'show below the main assembled parts.
5. The marking(RTL) indicates the retention time is limited for this item. After the discontinuation of this assembly in production, it will no longer be available.

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
		VEP03C01P	MAIN C.B.A.	1	(RTL)
					INCLUDING THE
					CAP DRIVE C.B.A.
					(VEP02412B),
					LUMINANCE &
					CHROMINANCE PACK
					C.B.A.(VEP03A61E),
					SUB LUMINANCE &
					CHROMINANCE PACK
					C.B.A.(VEP03A62C),
					REC/RF AMP PACK
					C.B.A. (VEP03A90A),
					INPUT/OUTPUT PACK
					C.B.A.(VEP03A72G),
					SUB AUDIO PACK
					C.B.A.(VEP04417C),
					Hi-Fi AUDIO PACK
					C.B.A.(VEP04447PS),
					NICAM DECODER PACK
					C.B.A.(VEP07675G),
					PDC C.B.A.
					(VEP07709A),
					TV DEMODULATOR PACK
					C.B.A.(VEP07801R).
		VEP02412B	CAP DRIVE C.B.A.	1	(RTL)
					INCLUDED IN MAIN
					C.B.A.(VEP03C01P).
		VEP03A61E	LUMINANCE & CHROMINANCE	1	(RTL)
			PACK C.B.A.		INCLUDED IN MAIN
					C.B.A.(VEP03C01P).
		VEP03A62C	SUB LUMINANCE & CHROMINANCE	1	(RTL)
			PACK C.B.A.		INCLUDED IN MAIN
					C.B.A.(VEP03C01P).
					INCLUDING THE
					REC/RF AMP PACK
					C.B.A. (VEP03A90A).
		VEP03A90A	REC/RF AMP PACK C.B.A.	1	(RTL)
					INCLUDED IN
					SUB LUMINANCE &
					CHROMINANCE
					PACK C.B.A.
					(VEP03A62C).
	■	VEP03A72G	INPUT/OUTPUT PACK C.B.A.		(RTL)
					INCLUDED IN MAIN
					C.B.A.(VEP03C01P).
		VEP04417C	SUB AUDIO PACK C.B.A.	1	(RTL)
					INCLUDED IN MAIN
					C.B.A.(VEP03C01P).
		VEP04447PS	Hi-Fi AUDIO PACK C.B.A.	1	(RTL)
					INCLUDED IN MAIN
					C.B.A.(VEP03C01P).
		VEP07675G	NICAM DECODER PACK C.B.A.	1	(RTL)
					INCLUDED IN MAIN
					C.B.A.(VEP03C01P).

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
		VEP07709A	PDC C.B.A.	1	(RTL)
					INCLUDED IN MAIN
					C.B.A.(VEP03C01P),
		VEP07801R	TV DEMODULATOR PACK C.B.A.	1	(RTL)
					INCLUDED IN MAIN
					C.B.A.(VEP03C01P).
		VEP05176L	HEAD AMP C.B.A.	1	(RTL)
		VEP07739AC	TIMER C.B.A.	1	(RTL)
		VEP06B45A	VR C.B.A.	1	(RTL)
		VEP03A53A	TBC C.B.A.	1	(RTL)
		VEP01558C	POWER C.B.A.	1	(RTL)<!>
		----------	MECHANISM CONNECTION C.B.A.	1	
		VEX0235	CYLINDER DRIVE C.B.A.	1	(RTL)
		----------	MOTOR C.B.A.	1	C.B.A. IS INCLUDED
					IN LOADING MOTOR (1
					UNIT (VEM0427).
		ENG47211G	TUNER	1	<!>
F1101		XBA2C16TH15	FUSE	1	<!>
	■	VEP03C01P	MAIN C.B.A.		(RTL)
C301		ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	
C303		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C305		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C306		ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C307		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C308		ECUM1H050CCN	C.CAPACITOR CH 50V 5P	1	
C309		ECUM1H562KBN	C.CAPACITOR CH 50V 5600P	1	
C310		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C311		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C312		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C313		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C314		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C315,16		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C317		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C318		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C319		ECUM1H080DCN	C.CAPACITOR CH 50V 8P	1	
C321,22		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	2	
C324		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C325,26		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C329		ECQV1H334JM	P.CAPACITOR 50V 0.33U	1	
C331		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C332,33		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C334		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C335		ECEA0JKA220	E.CAPACITOR 6.3V 220U	1	
C336		ECEA1EKN4R7	E.CAPACITOR 25V 4.7U	1	
C337		ECEA1HKN010	E.CAPACITOR 50V 1U	1	
C338		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C339		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C340		ECEA0JKA220	E.CAPACITOR 6.3V 22U	1	
C341		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C342		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C344		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C345,46		ECEA1CKA100	E.CAPACITOR 16V 10U	2	
C348		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C349		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C350		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C0701-03		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	3	
C0704		ECUX1H331JCV	C.CAPACITOR CH 50V 330P	1	
C0705		ECUX1H151JCV	C.CAPACITOR CH 50V 150P	1	
C0706		ECEA1HKA0R1	E.CAPACITOR 50V 0.1U	1	
C0707,08		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	2	
C0709		ECUX1H120JCV	C.CAPACITOR CH 50V 12P	1	
C0710		ECUX1H470JPV	C.CAPACITOR CH 50V 47P	1	
C0711		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C0712		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C0714		ECQB1H473JF	P.CAPACITOR 50V 0.047U	1	
C0715		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C0716		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C0717		ECUX1H270JPV	C.CAPACITOR CH 50V 27P	1	
C0718		ECEA1HKAR47	E.CAPACITOR 50V 0.47U	1	
C0719		ECUX1H150JCV	C.CAPACITOR CH 50V 15P	1	
C0720		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C0722		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C0723		ECEA1HKA0R1	E.CAPACITOR 50V 0.1U	1	
C0724		ECQB1H473JF	P.CAPACITOR 50V 0.047U	1	
C0726		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C0727		ECKF1H103ZF	C.CAPACITOR 50V 0.01U	1	
C0729		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C0730		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C0733		ECKF1H103ZF	C.CAPACITOR 50V 0.01U	1	
C802		ECUM1H471JCN	C.CAPACITOR CH 50V 470P	1	
C803		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C804		ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	
C805,06		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C808		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C809		ECEA1HKA4R7	E.CAPACITOR 50V 4.7U	1	
C810		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C811-13		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C814		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C815		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C816		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C817		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C818		ECEA1HKA0R1	E.CAPACITOR 50V 0.1U	1	
C819		ECQB1H332JZ	F.CAPACITOR 50V 3300P	1	
C820		ECUM1H331JCN	C.CAPACITOR CH 50V 330P	1	
C821-23		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C824		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C825-27		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C828,29		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	2	
C830		ECUM1H471JCN	C.CAPACITOR CH 50V 470P	1	
C831		ECUM1H270JCN	C.CAPACITOR CH 50V 27P	1	
C832		ECQV1H154JM	P.CAPACITOR 50V 0.15U	1	
C833		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C834		ECUM1H151JCN	C.CAPACITOR CH 50V 150P	1	
C835		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C836		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C1001		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C1002		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C1003		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C2001		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C2003		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C2005		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C2006		ECEA1HKAR47	E.CAPACITOR 50V 0.47U	1	
C2007		ECQV1H683JM	P.CAPACITOR 50V 0.068U	1	
C2009		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C2010		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C2501-04		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	4	
C2505		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C2506		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C2507		ECQV1H683JM	P.CAPACITOR 50V 0.068U	1	
C2508-10		ECEA1HKA2R2	E.CAPACITOR 50V 2.2U	3	
C2511-14		ECUM1E333KBN	C.CAPACITOR CH 25V 0.033U	4	
C2515		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C2516		ECEA1HKAR22	E.CAPACITOR 50V 0.22U	1	
C2517		ECA0JM221	E.CAPACITOR 6.3V 220U	1	
C2518		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C2519,20		ECUM1E333KBN	C.CAPACITOR CH 25V 0.033U	2	
C2521		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C2522		ECEA1HKNR47	E.CAPACITOR 50V 0.47U	1	
C2523		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C2524,25		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	2	
C2526		ECA0JM221	E.CAPACITOR 6.3V 220U	1	
C2527		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C2528		ECEA1HKNR47	E.CAPACITOR 50V 0.47U	1	
C2529		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C2530		ECEA1HKN010	E.CAPACITOR 50V 1U	1	
C2531		ECUM1E224ZFN	C.CAPACITOR CH 25V 0.22U	1	
C2532		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C2533		ECEA0JKA330	E.CAPACOTOR 6.3V 33U	1	
C2534,35		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	2	
C3001		ECUM1H471JCN	C.CAPACITOR CH 50V 470P	1	
C3002		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C3003-06		ECEA1HKA010	E.CAPACITOR 50V 1U	4	
C3007,08		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C3009		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C3010		ECA1AM331	E.CAPACITOR 10V 330U	1	
C3011		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C3012		ECA1AM331	E.CAPACITOR 10V 330U	1	
C3013		ECA0JM331	E.CAPACITOR 6.3V 330U	1	
C3014		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C3015		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3016		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3017-19		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	3	
C3022		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3023,24		ECEA1AKA330	E.CAPACITOR 10V 33U	2	
C3027,28		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	2	
C3029		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3030		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3031		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C3032		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3033		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C3301		ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	
C3302		ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	
C3304-08		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	5	
C3309		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3310		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3312-14		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C3321		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3322		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C3323		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3324		ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C3325		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3326		ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C3327,28		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C3329		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3330		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3336		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3338		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3339		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3340		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C3341		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3342		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C3343		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3344		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C3345		ECUM1H391JCN	C.CAPACITOR CH 50V 390P	1	
C3346		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3347		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C3351,52		ECUM1H181JCN	C.CAPACITOR CH 50V 180P	2	
C3353		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C3354		ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
C3372		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C3401		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C3402		ECUM1H080DCN	C.CAPACITOR CH 50V 8P	1	
C3403-07		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	5	
C3408,09		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	2	
C3421		ECUM1H472KBN	C.CAPACITOR CH 50V 4700P	1	
C3422		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3423		ECUM1H050CCN	C.CAPACITOR CH 50V 5P	1	
C3424		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C3425		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3426		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C3427		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3428		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3429		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3430		ECEA0JKA330	E.CAPACOTOR 6.3V 33U	1	
C3431		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3443		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3444		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3445		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3447		ECUM1H121JCN	C.CAPACITOR CH 50V 120P	1	
C3448		ECUM1H151JCN	C.CAPACITOR CH 50V 150P	1	
C3449		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C3450,51		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C3452		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3472		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3473		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3474		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3475-77		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C3501		ECA0JM471	E.CAPACITOR 6.3V 470U	1	
C3502		ECRHA030E54R	TRIMMER 3P	1	
C3503		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3504		ECQB1H223JF	P.CAPACITOR 50V 0.022U	1	
C3505		ECEA1HKN010	E.CAPACITOR 50V 1U	1	
C3506		ECQB1H682J2	F.CAPACITOR 50V 6800P	1	
C3507		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C3508		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C3509		ECUM1H122KBN	C.CAPACITOR CH 50V 1200P	1	
C3510		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3511		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C3512		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3513		ECUM1H080DCN	C.CAPACITOR CH 50V 8P	1	
C3514,15		ECEA1CKA100	E.CAPACITOR 16V 10U	2	
C3516,17		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	2	
C3518		ECEA1HKAR47	E.CAPACITOR 50V 0.47U	1	
C3519		ECUM1H221JCN	C.CAPACITOR CH 50V 220P	1	
C3520		ECEA1CKA330	E.CAPACITOR 16V 33U	1	
C3521		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3522		ECEA1CKA330	E.CAPACITOR 16V 33U	1	
C3523		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3524		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C3525-27		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C3528		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C3529		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3530		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3531		ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C3532		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3533		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C3534		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3601		ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	
C3602		ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
C3603		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3604		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C3605		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3606		ECUM1H681JCN	C.CAPACITOR CH 50V 680P	1	
C3607		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3608		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C3609		ECUM1H271JCN	C.CAPACITOR CH 50V 270P	1	
C3610		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3611		ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	
C3613		ECUM1H181JCN	C.CAPACITOR CH 50V 180P	1	
C3614		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C3901-05		ECEA1CKA100	E.CAPACITOR 16V 10U	5	
C3906		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3907		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C3908		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3909,10		ECA1AM471	E.CAPACITOR 10V 470U	2	
C3911		ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	
C3912		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C3913		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3914		ECEA1EK3R3	E.CAPACITOR 25V 3.3U	1	
C3915		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C3916		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3917		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C3918		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C3919		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3922		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C3923		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C3924		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3927		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C4001,02		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C4003,04		ECEA1CKA100	E.CAPACITOR 16V 10U	2	
C4005		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C4006		ECUM1C224ZFN	C.CAPACITOR CH 16V 0.22U	1	
C4007		ECEA1CPZ101	E.CAPACITOR 16V 100U	1	
C4008		ECUM1C224ZFN	C.CAPACITOR CH 16V 0.22U	1	
C4009		ECEA1CPZ101	E.CAPACITOR 16V 100U	1	
C4010		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C4011,12		ECUM1H122KBN	C.CAPACITOR CH 50V 1200P	2	
C4501		ECQB1H152JZ	F.CAPACITOR 50V 1500P	1	
C4502		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4503		ECUX1H152KBV	C.CAPACITOR CH 50V 1500P	1	
C4504,05		ECEA1CU470	E.CAPACITOR 16V 47U	2	
C4506		ECEA1CU100	E.CAPACITOR 16V 10U	1	
C4507		ECQB1H223JF	P.CAPACITOR 50V 0.022U	1	
C4508		ECEA1EBZ4R7	E.CAPACITOR 25V 4.7U	1	
C4509		ECEA1AU470	E.CAPACITOR 10V 47U	1	
C4510		ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C4511		ECQB1H332JE	P.CAPACITOR 50V 3300P	1	
C4512		ECUX1H561JV	C.CAPACITOR CH 50V 560P	1	
C4513		ECUX1H681JV	C.CAPACITOR CH 50V 680P	1	
C4514		ECUX1H561JV	C:CAPACITOR CH 50V 560P	1	
C4515		ECEA1EU4R7	E.CAPACITOR 25V 4.7U	1	
C4517		ECEA1AU101	E.CAPACITOR 10V 100U	1	
C4518		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4521		ECUM1E473KBN	C.CAPACITOR CH 25V 0.047U	1	
C4522		ECEA1HU3R3	E.CAPACITOR 50V 3.3U	1	
C4528		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4530		ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C4533		ECEA1CU330	E.CAPACITOR 16V 33U	1	
C4537		ECUX1H102JCV	C.CAPACITOR CH 50V 1000P	1	
C4538		ECEA1HUR47	E.CAPACITOR 50V 0.47U	1	
C4539		ECUX1C224ZFV	C.CAPACITOR CH 16V 0.22U	1	
C4541		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4545		ECUX1H102KBV	C.CAPACITOR CH 50V 1000P	1	
C4551		ECQB1H223JF	P.CAPACITOR 50V 0.022U	1	
C4552		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4556		ECEA1CU100	E.CAPACITOR 16V 10U	1	
C4558		ECEA1EBZ4R7	E.CAPACITOR 25V 4.7U	1	
C4559		ECEA1AU470	E.CAPACITOR 10V 47U	1	
C4560		ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C4561		ECQB1H332JF	P.CAPACITOR 50V 3300P	1	
C4562		ECUX1H561JV	C.CAPACITOR CH 50V 560P	1	
C4563		ECUX1H681JV	C.CAPACITOR CH 50V 680P	1	
C4564		ECUX1H561JV	C.CAPACITOR CH 50V 560P	1	
C4565		ECEA1EU4R7	E.CAPACITOR 25V 4.7U	1	
C4567		ECEA1AU101	E.CAPACITOR 10V 100U	1	
C4568		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4572		ECEA1HU3R3	E.CAPACITOR 50V 3.3U	1	
C4576		ECUM1E473KBN	C.CAPACITOR CH 25V 0.047U	1	
C4583		ECEA1CU330	E.CAPACITOR 16V 33U	1	
C4585,86		ECEA1AU101	E.CAPACITOR 10V 100U	2	
C4591		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4592		ECUX1H152KBV	C.CAPACITOR CH 50V 1500P	1	
C4593		ECUX1H102JCV	C.CAPACITOR CH 50V 1000P	1	
C4594,95		ECUX1H471JCV	C.CAPACITOR CH 50V 470P	2	
C4596		ECEA1CU100	E.CAPACITOR 16V 10U	1	
C4597		ECUX1H330JCV	C.CAPACITOR CH 50V 33P	1	
C4598		ECUX1H102JCV	C.CAPACITOR CH 50V 1000P	1	
C4604		ECUM1H182JN	C.CAPACITOR CH 50V 1800P	1	
C4606		ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C4611		ECQB1H182JZ	F.CAPACITOR 50V 1800P	1	
C4613		ECUX1H821JCV	C.CAPACITOR CH 50V 820P	1	
C4616		ECUX1H102ZFV	C.CAPACITOR CH 50V 1000P	1	
C4617		ECEA1OM22	E.CAPACITOR 10V 22U	1	
C4618		ECQB1H822JZ	F.CAPACITOR 50V 8200P	1	
C4621		ECEA0JU101	E.CAPACITOR 6.3V 100U	1	
C4629		ECQB1H562JZ	P.CAPACITOR 50V 5600P	1	
C4636		ECUX1H471JV	C.CAPACITOR CH 50V 470P	1	
C4638		ECQB1H822JZ	F.CAPACITOR 50V 8200P	1	
C4652,53		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	2	
C4701		ECCD2H181J	C.CAPACITOR 500V 180P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C4702		ECQP1222JZ	P.CAPACITOR 100V 2200P	1	
C4703		ECQB1H102JF	P.CAPACITOR 50V 1000P	1	
C4704		ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C4705		ECEA16M33	E.CAPACITOR 16V 33U	1	
C4706		ECQV1H104JM	P.CAPACITOR 50V 0.1U	1	
C4707		ECQB1H223JF	P.CAPACITOR 50V 0.022U	1	
C4708		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C4709		ECQB1H472JF	P.CAPACITOR 50V 4700P	1	
C4710		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C4711,12		ECEA1AKA220	E.CAPACITOR 10V 22U	2	
C4713		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C4714		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C4901,02		ECQB1H103JZ	P.CAPACITOR 50V 0.01U	2	
C4903,04		ECQB1H332JZ	F.CAPACITOR 50V 3300P	2	
C4905,06		VCEA1CAD100	E.CAPACITOR 16V 10U	2	
C4907,08		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
C4909,10		ECQB1H103JZ	P.CAPACITOR 50V 0.01U	2	
C4911,12		ECQB1H332JZ	F.CAPACITOR 50V 3300P	2	
C4913,14		VCEA1CAD100	E.CAPACITOR 16V 10U	2	
C4915,16		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
C4917,18		ECQB1H103JZ	P.CAPACITOR 50V 0.01U	2	
C4919,20		ECQB1H332JZ	F.CAPACITOR 50V 3300P	2	
C4923,24		VCEA0JAC101	E.CAPASITOR 6.3V 100U	2	
C6001		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6002		ECEA0JKA330	E.CAPACITOR 6.3V 33U	1	
C6003		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6004		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C6005		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6006		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C6007,08		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	2	
C6009		ECUM1H472KBN	C.CAPACITOR CH 50V 4700P	1	
C6010		ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	1	
C6011		ECUM1H472KBN	C.CAPACITOR CH 50V 4700P	1	
C6012		ECUM1H392KBN	C.CAPACITOR CH 50V 3900P	1	
C6013		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C6014		ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C6015		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C6016,17		ECEA1HKN3R3	E.CAPACITOR 50V 3.3U	2	
C6018		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C6019		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6020		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C6021		ECEA16M10	E.CAPACITOR 16V 1U	1	
C6022		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C6023		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C6024		ECEA1HKA4R7	E.CAPACITOR 50V 4.7U	1	
C6025		ECUM1H392KBN	C.CAPACITOR CH 50V 3900P	1	
C6026		ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	1	
C6027		ECUM1E104KBN	C.CAPACITOR CH 25V 0.1U	1	
C6028		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C6029		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C6030		EECS5R5T224N	E.CAPACITOR 5.5V 0.22U	1	
C6034		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6035		ECEA1CKA330	E.CAPACITOR 16V 33U	1	
C6036		ECEA0JKA330	E.CAPACITOR 6.3V 33U	1	
C6037		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6038		ECEA1AKA470	E.CAPACITOR 10V 47U	1	
C6040		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6041		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C6042		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6043		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C6045		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6046		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6049		ECUM1H271JCN	C.CAPACITOR CH 50V 270P	1	
C6050,51		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	2	
C6053-56		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	4	
C6062		ECUM1H271JCN	C.CAPACITOR CH 50V 270P	1	
C6063		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C7408		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7409		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C7410		ECUM1H563ZFN	C.CAPACITOR CH 50V 0.056U	1	
C7411		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7412		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7413		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C7414		ECUM1H821JCN	C.CAPACITOR CH 50V 820P	1	
C7415		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C7416		ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	
C7418		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C7419		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C7420		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7421		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C7422,23		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C7424		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C7425		ECEA1HKA100	E.CAPACITOR 50V 10U	1	
C7426		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C7427		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7428		ECEA1HKA2R2	E.CAPACITOR 50V 2.2U	1	
C7429		ECEA1CSN100	E.CAPACITOR 16V 10U	1	
C7901-03		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	3	
C7904		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C7905		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7906		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C7907		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7908		ECQV1H104JM	P.CAPACITOR 50V 0.1U	1	
C7909		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7910		ECEA1CK100	E.CAPACITOR 16V 10U	1	
C7911-13		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	3	
C7914		ECEA0JK470I	E.CAPACITOR 6.3V 47U	1	
C7915		ECUX1H100DCV	C.CAPACITOR CH 50V 10P	1	
C7916		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7917		ECEA0JK470I	E.CAPACITOR 6.3V 47U	1	
C7918		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7919		ECEA0JK470I	E.CAPACITOR 6.3V 47U	1	
C7920		ECEA1CK100	E.CAPACITOR 16V 10U	1	
C7921		ECQB1H102JH	P.CAPACITOR 50V 1000P	1	
C7922		ECQB1H272JH	P.CAPACITOR 50V 2700P	1	
C7923		ECUX1H151JCV	C.CAPACITOR CH 50V 150P	1	
C7924		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C7925		ECUX1H561JCV	C.CAPACITOR CH 50V 560P	1	
C7926		ECEA1CK100	E.CAPACITOR 16V 10U	1	
C7927		ECQB1H102JH	P.CAPACITOR 50V 1000P	1	
C7928		ECQB1H272JH	P.CAPACITOR 50V 2700P	1	
C7929		ECUX1H151JCV	C.CAPACITOR CH 50V 150P	1	
C7930		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C7931		ECUX1H561JCV	C.CAPACITOR CH 50V 560P	1	
C7932,33		ECEA1CKN100	E.CAPACITOR 16V 10U	2	
C7934		ECUX1H220JCV	C.CAPACITOR CH 50V 22P	1	
C7935		ECUX1H470JCV	C.CAPACITOR CH 50V 47P	1	
C7937		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7938		ECEA1HKR47	E.CAPACITOR 50V 0.47U	1	
C7939,40		ECEA1HKN0R1	E.CAPACITOR 50V 0.1U	2	
C7941		ECEA1HKR47	E.CAPACITOR 50V 0.47U	1	
C7942		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7943		ECUX1H100DCV	C.CAPACITOR CH 50V 10P	1	
C7945		ECUX1H101JCV	C.CAPACITOR CH 50V 100P	1	
C7946		ECUX1H220JCV	C.CAPACITOR CH 50V 22P	1	
C7947		ECEA1HKR47	E.CAPACITOR 50V 0.47U	1	
C7948		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7949		ECEA0JK330	E.CAPACITOR 6.3V 33U	1	
C7950-53		ECEA1CKN100	E.CAPACITOR 16V 10U	4	
C7954		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C7955-58		ECEA1CK100	E.CAPACITOR 16V 10U	4	
C7960		ECEA1CK100	E.CAPACITOR 16V 10U	1	
C7961		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7963		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7964		ECEA1CK100	E.CAPACITOR 16V 10U	1	
C7965,66		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	2	
C7967		ECEA1CK100	E.CAPACITOR 16V 10U	1	
C71001		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
C71003		ECEA0JK101	E.CAPACITOR 6.3V 100U	1	
C71004		ECEA1HK010	E.CAPACITOR 50V 1U	1	
C71005		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
C71007		ECEA1AKN470	E.CAPACITOR 10V 47U	1	
C71008		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C71009,10		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C71011		ECEA1HKN010	E.CAPACITOR 50V 1U	1	
C71012		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C71014		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C71016,17		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C71019		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C71020		ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C71022		ECUM1H390JCN	C.CAPACITOR CH 50V 39P	1	
C71023		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C71024		ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
D301		1SS283	DIODE	1	
D303		MA151WK	DIODE	1	
D305		1SS254	DIODE	1	
D306		MA723VT	DIODE	1	
D307		1SS254	DIODE	1	
D308,09		MA151WK	DIODE	2	
D801-07		1SS254	DIODE	7	
D808		MA151WK	DIODE	1	
D1002		1SS254	DIODE	1	
D2001-05		1SS254	DIODE	5	
D2501-08		1SS254	DIODE	8	
D2510		1SS254	DIODE	1	
D3002		MA28W-A	DIODE	1	
D3003		1SS254	DIODE	1	
D3301		1SS254	DIODE	1	
D3302		MA151K	DIODE	1	
D3304		MA151K	DIODE	1	
D3403		MA723VT	DIODE	1	
D3408		1SS254	DIODE	1	
D3501		1SS254	DIODE	1	
D3502		MA153	DIODE	1	
D3504		MA151WK	DIODE	1	
D3901		1SS254	DIODE	1	
D3902		MA4130L	DIODE	1	
D3903		1SS254	DIODE	1	
D3904		MA151WK	DIODE	1	
D3906		MA151WA	DIODE	1	
D3908,09		1SS254	DIODE	2	
D4003		MA723VT	DIODE	1	
D4004		1SS254	DIODE	1	
D4501-04		MA141K	DIODE	4	
D4601,02		MA141K	DIODE	2	
D4701,02		1SS254	DIODE	2	
D6001		1SS254	DIODE	1	
D6002		MA723VT	DIODE	1	
D6003		1SS254	DIODE	1	
D6005		MA151WK	DIODE	1	
D6006		MA151WA	DIODE	1	
D6007		MA151WK	DIODE	1	
D6008		MA151WA	DIODE	1	
D6009		11EQS04	DIODE	1	
D6011,12		11EQS04	DIODE	2	
D6013		MA723VT	DIODE	1	
D6014		1SS254	DIODE	1	
D6015		MA723VT	DIODE	1	
D7402		MA4300M	DIODE	1	
D7404		MA151WK	DIODE	1	
D7405		1SS254	DIODE	1	
D7901,02		MA141WK	DIODE	2	
D7904		MA141K	DIODE	1	
D7905		MA141WA	DIODE	1	
D7906		MA141WK	DIODE	1	
D7907		MA141K	DIODE	1	
D71001,02		MA151K	DIODE	2	
DL801		EFDUN124A13N	DELAY	1	
DL802		EFDVR645A45A	DELAY LINE	1	
DL803		VLD0147	DELAY LINE	1	
FL301		ELB4M022	FILTER	1	
FL302		VLF0639	FILTER	1	
FL801		VLF1079	FILTER	1	
FL3601		ELB4R031	FILTER	1	
FL3901		VLF1120	FILTER	1	
FL3902		VLF0765	FILTER	1	
FL7901		VLF0702	FILTER	1	
FL7902		ELKAW103EB	FILTER	1	
FL7903		ELKAW101GB	FILTER	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
FL7904,05		ELKAW103EB	FILTER	2	
FL7907-11		ELKAW103EB	FILTER	5	
FL7914,15		ELKAW101GB	FILTER	2	
FL7916		VLF0633	FILTER	1	
IC301		VEFH20B	HIC	1	
IC302		MN3859S	IC	1	
IC303		AN1358S	IC	1	
IC0701		LA7576	IC	1	
IC801		VCR0383	IC	1	
IC802		M52352FP	IC	1	
IC2001		AN3727S	IC	1	
IC2002		UPD4053BG	IC	1	
IC2501		BA6219B	IC	1	
IC2502		LM358PS	IC	1	
IC2503		XRA6439S	IC	1	
IC2504		LM358PS	IC	1	
IC2505		LM393P	IC	1	
IC3001		AN3581S	IC	1	
IC3002		M52055FP	IC	1	
IC3301		M52083FP	IC	1	
IC3401		NJM2233BMA	IC	1	
IC3403		MN155202VZAM	IC	1	
IC3404		MN1280S	IC	1	
IC3405		UPD4066BG	IC	1	
IC3501		LC74760	IC	1	
IC3502		M52055FP	IC	1	
IC3503		NJM2246DA	IC	1	
IC3504		NJM2233BMA	IC	1	
IC3601		AN6308S	IC	1	
IC3901		M52475AP	IC	1	
IC3902		AN3916	IC	1	
IC3904		AN1393S	IC	1	
IC4001		NJM4565DD	IC	1	
IC4501		XLH7773AKS	IC	1	
IC4601		BA7755AF	IC	1	
IC4701		AN1358S	IC	1	
IC4702		MN4066BS	IC	1	
IC4901		LA7155M	IC	1	
IC6001		MN6755320H3W	IC	1	
IC6002		M38024V1BN	IC	1	
IC6003		MN1280S	IC	1	
IC6005		UPD4052BG	IC	1	
IC6007		M6M80041P	IC	1	
IC6008		TL431CLP	IC	1	
IC7401		M66006FP	IC	1	
IC7402		LA7217M	IC	1	
IC7901		TB1204F	IC	1	
IC7902		TA2009F	IC	1	
IC7903		M5238FP	IC	1	
IC71001		MN170801VZAZ	IC	1	
IC71003		MV1820FCGDP	IC	1	
IC71004		MN1280S	IC	1	
J3901,02		VJS1470	21PIN SKIRT JACK	2	
K2		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
K4		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
K6		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
K101,02		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
K0702		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
K0704-06		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	3	
K3003		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K3010-12		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	3	
K3909		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K4901,02		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	2	
K6003-05		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	3	
K6016		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K7404		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K7409,10		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	2	
K7417		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
L302		VLQ0188J180	COIL 18UH	1	
L304		VLQ0188J270	COIL 27UH	1	
L305		VLQ0188J101	COIL 100UH	1	
L306		VLQ0188J390	COIL 39UH	1	
L309-11		VLQ0188J330	COIL 33UH	3	
L312		ELESN121JA	COIL 120UH	1	
L0701		VLQ0163JR22	COIL 0.22UH	1	
L0705		VLQ0163J2R7	COIL 2.7UH	1	
L0706		VLQEL05S8R2K	COIL	1	
L801,02		ELESE681KA	COIL 680UH	2	
L803		ELESN331KA	COIL 330UH	1	
L804		VLQ0407101K	COIL 100UH	1	
L806		VLQ0407101K	COIL 100UH	1	
L807,08		VLQ0188J150	COIL 15UH	2	
L809		VLQ0188J330	COIL 33UH	1	
L810		VLQ0188J150	COIL 15UH	1	
L811		VLQ0188J151	COIL 150UH	1	
L812		VLQ0188J270	COIL 27UH	1	
L813,14		VLQ0188J150	COIL 15UH	2	
L2001		VLQ0569	COIL	1	
L2002		VLQ0556	COIL	1	
L2501		VLP0074	COIL	1	
L2502		ELESE330KA	COIL 33UH	1	
L2503		ELESE102KA	COIL 1000UH	1	
L3001-03		VLQ0188J330	COIL 33UH	3	
L3004		VLQ0398	COIL	1	
L3005-08		VLQ0556	COIL	4	
L3301		VLQ0188J150	COIL 15UH	1	
L3304		VLQ0188J330	COIL 33UH	1	
L3306		VLQ0188J390	COIL 39UH	1	
L3307		VLQ0188J120	COIL 12UH	1	
L3308		VLQ0188J330	COIL 33UH	1	
L3309		VLQ0188J181	COIL 180UH	1	
L3310		VLQ0188J270	COIL 27UH	1	
L3313		ELESE681KA	COIL 680UH	1	
L3315,16		VLQ0188J5R6	COIL 5.6UH	2	
L3318		VLQ0188J330	COIL 33UH	1	
L3323		VLQ0188J330	COIL 33UH	1	
L3401		VLQ0188J150	COIL 15UH	1	
L3404		VLQ0188J220	COIL 22UH	1	
L3405		VLQ0188J330	COIL 33UH	1	
L3412		VLQ0188J330	COIL 33UH	1	
L3415		VLQ0188J120	COIL 12UH	1	
L3501		VLQ0188J330	COIL 33UH	1	
L3502		VLQ0188J5R6	COIL 5.6UH	1	
L3503		VLQ0188J100	COIL 10UH	1	
L3504		VLQ0188J390	COIL 39UH	1	
L3505		VLQ0188J820	COIL 82UH	1	
L3508		VLQ0188J330	COIL 33UH	1	
L3601		VLQEL05T120	COIL 12UH	1	
L3602,03		VLQEL05S101K	COIL 100UH	2	
L3604		VLQEL05T151J	COIL 150UH	1	
L3605		VLQEL05S820K	COIL 82UH	1	
L3901-04		ELESE101KA	COIL 100UH	4	
L3906		VLQ0188J1R0	COIL 1UH	1	
L4001,02		ELESE101KA	COIL 100UH	2	
L4501,02		ELESE101KA	COIL 100UH	2	
L4601		VLQEL07F153J	COIL	1	
L4701		ELESE471KA	COIL	1	
L4702		ELESE101KA	COIL 100UH	1	
L4901,02		ELESE102KA	COIL 1000UH	2	
L4903,04		ELESE101KA	COIL 100UH	2	
L4905,06		ELESE102KA	COIL 1000UH	2	
L4907,08		ELESE101KA	COIL 100UH	2	
L4909,10		ELESE102KA	COIL 1000UH	2	
L6001		VLP0083	COIL	1	
L6002		ELESE101KA	COIL 100UH	1	
L6003		VLP0083	COIL	1	
L6007,08		VLP0083	COIL	2	
L6009		ELESE101KA	COIL 100UH	1	
L7407		VLQ0599J1R0	COIL 1UH	1	
L7408-12		VLQ0599J680	COIL 68UH	5	
L7901,02		VLP0083	COIL	2	
L71001,02		VLQ0188J101	COIL 100UH	2	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
L71003-12		VLQ0584	COIL	10	
L71013		VLQ0188J3R3	COIL 3.3UH	1	
P1001		VJP2593	CONNECTOR (MALE)	1	
P1002		VJP1142	CONNECTOR (MALE)	1	
P2001		VJP1232T	CONNECTOR (MALE) 5P	1	
P2003		VJP3502	CONNECTOR (MALE)	1	
P2004		VJS3537A015G	CONNECTOR (FEMALE) 15P	1	
P3001		VJS3537A020G	CONNECTOR (FEMALE) 20P	1	
P3002		VJP3233A010	CONNECTOR (MALE) 10P	1	
P3003		VJP1393T	CONNECTOR (MALE) 13P	1	
P4001		VJS2331	CONNECTOR (FEMALE)	1	
P4002		VJP1238T	CONNECTOR (MALE) 11P	1	
P4003		VJP1230T	CONNECTOR (MALE) 3P	1	
P6001		VJS3537A014G	CONNECTOR (FEMALE) 14P	1	
P6003		VJP1233T	CONNECTOR (MALE) 6P	1	
P6004		VJP1235T	CONNECTOR (MALE) 8P	1	
P7401,02		VJS3537A020G	CONNECTOR (FEMALE) 20P	2	
PK0701		VJR0816A010W	CONNECTOR (MALE) 10P	1	
PK4001-03		VJR0757B018T	CONNECTOR (MALE) 18P	3	
PK7901,02		VJR0477	PACK PIN	2	
PP0701		VJP3589A004B	CONNECTOR (MALE) 4P	1	
PP2001		VJP3042A012W	CONNECTOR (MALE) 12P	1	
PP2002		VJP3042A010W	CONNECTOR (MALE) 10P	1	
PP3001		VJP3042A009W	CONNECTOR (MALE) 9P	1	
PP3002		VJP3042A012W	CONNECTOR (MALE) 12P	1	
PP3003		VJP3042A013W	CONNECTOR (MALE) 13P	1	
PP3011,12		VJP3042A018W	CONNECTOR (MALE) 18P	2	
PP3013		VJP3042A014W	CONNECTOR (MALE) 14P	1	
PP3021-24		VJP3043A012W	CONNECTOR (MALE) 12P	4	
PP3301		VJP3042A011W	CONNECTOR (MALE) 11P	1	
PP4501		VJP3042A017W	CONNECTOR (MALE) 17P	1	
PP7406		VJP3043A010W	CONNECTOR (MALE) 10P	1	
PS301		VJS3042B009W	CONNECTOR (FEMALE) 9P	1	
PS302		VJS3042B012W	CONNECTOR (FEMALE) 12P	1	
PS303		VJS3042B013W	CONNECTOR (FEMALE) 13P	1	
PS2001		VJS3042B012W	CONNECTOR (FEMALE) 12P	1	
PS2002		VJS3042B010W	CONNECTOR (FEMALE) 10P	1	
PS3021-24		VJS3043B012W	CONNECTOR (FEMALE) 12P	4	
PS3302,03		VJS3042B018W	CONNECTOR (FEMALE) 18P	2	
PS3501		VJS3042F014W	CONNECTOR (FEMALE) 14P	1	
PS3601		VJS3042B011W	CONNECTOR (FEMALE) 11P	1	
PS4701		VJS3042B017W	CONNECTOR (FEMALE) 17P	1	
PS71001		VJS3043B010W	CONNECTOR (FEMALE) 10P	1	
Q301		MSC2295	TRANSISTOR	1	
Q302		MSB709	TRANSISTOR	1	
Q303,04		MSC2295	TRANSISTOR	2	
Q305		MSD601	TRANSISTOR	1	
Q306		MSC2295	TRANSISTOR	1	
Q307,08		MSB709	TRANSISTOR	2	
Q0701		MSD601-S	TRANSISTOR	1	
Q0702		MSB709	TRANSISTOR	1	
Q801		2SA1022	TRANSISTOR	1	
Q802		MSC2295	TRANSISTOR	1	
Q803		MSB709	TRANSISTOR	1	
Q1001		2SD1996	TRANSISTOR	1	
Q2001,02		MSB709	TRANSISTOR	2	
Q3001		MSD602	TRANSISTOR	1	
Q3002		2SB1322	TRANSISTOR	1	
Q3003		MSD601	TRANSISTOR	1	
Q3004		MSC2295	TRANSISTOR	1	
Q3005,06		MSD601	TRANSISTOR	2	
Q3301,02		MSC2295	TRANSISTOR	2	
Q3304,05		MSD601	TRANSISTOR	2	
Q3401,02		MSC2295	TRANSISTOR	2	
Q3403		MSD601	TRANSISTOR	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
Q3404		MSC2295	TRANSISTOR	1	
Q3405-07		MSD601	TRANSISTOR	3	
Q3408		MSD602	TRANSISTOR	1	
Q3409		MSB710	TRANSISTOR	1	
Q3410-12		MSD601	TRANSISTOR	3	
Q3422		MSD1328	TRANSISTOR	1	
Q3423		MSD601	TRANSISTOR	1	
Q3424		MSB710	TRANSISTOR	1	
Q3425		MSC2295	TRANSISTOR	1	
Q3426,27		MSD601	TRANSISTOR	2	
Q3501		MSD601	TRANSISTOR	1	
Q3502		MSB709	TRANSISTOR	1	
Q3601		MSD601	TRANSISTOR	1	
Q3602,03		MSC2295	TRANSISTOR	2	
Q3604		MSB709	TRANSISTOR	1	
Q3901,02		2SD1991A	TRANSISTOR	2	
Q3903		MSD1328	TRANSISTOR	1	
Q3904		MSD601	TRANSISTOR	1	
Q3905		MSC2295	TRANSISTOR	1	
Q3906		MSB709	TRANSISTOR	1	
Q3907		MSD601	TRANSISTOR	1	
Q3912		2SD1996	TRANSISTOR	1	
Q3913-15		MSD601	TRANSISTOR	3	
Q3916		MSB710	TRANSISTOR	1	
Q3917		MSD602	TRANSISTOR	1	
Q3918		MSB710	TRANSISTOR	1	
Q4501		2SD655TZ	TRANSISTOR	1	
Q4551		2SB561	TRANSISTOR	1	
Q4552		2SD1819A	TRANSISTOR	1	
Q4601,02		2SD1819A	TRANSISTOR	2	
Q4701		2SD602A-R	TRANSISTOR	1	
Q4702,03		MSD601	TRANSISTOR	2	
Q4704,05		MSB710	TRANSISTOR	2	
Q4706		2SB1378	TRANSISTOR	1	
Q4707		2SD601A	TRANSISTOR	1	
Q4708		2SB1378	TRANSISTOR	1	
Q6001		2SD1991A	TRANSISTOR	1	
Q6002		MSB709	TRANSISTOR	1	
Q6003		2SD1915F	TRANSISTOR	1	
Q6004-06		MSD601	TRANSISTOR	3	
Q6008		2SD1991	TRANSISTOR	1	
Q7402		MSD1328-S	TRANSISTOR	1	
Q7901,02		MSD601	TRANSISTOR	2	
Q7903		2SC3931CD	TRANSISTOR	1	
Q7904-07		2SB1219	TRANSISTOR	4	
Q7908,09		2SC3929	TRANSISTOR	2	
Q7910		2SD1820	TRANSISTOR	1	
Q7913		2SB1218-Q	TRANSISTOR	1	
Q7914,15		2SD1979-S	TRANSISTOR	2	
Q7916		2SB1219	TRANSISTOR	1	
Q71001		2SC2295	TRANSISTOR	1	
Q71002		2SA1022	TRANSISTOR	1	
Q71003		2SC2295	TRANSISTOR	1	
QR301		MRN1402	TRANSISTOR-RESISTOR	1	
QR302		MRN1403	TRANSISTOR-RESISTOR	1	
QR303		MRN1404	TRANSISTOR-RESISTOR	1	
QR304		MRN1402	TRANSISTOR-RESISTOR	1	
QR305		MRN2404	TRANSISTOR-RESISTOR	1	
QR306		XN6213	TRANSISTOR-RESISTOR	1	
QR307		MRN1404	TRANSISTOR-RESISTOR	1	
QR308		MRN1407	TRANSISTOR-RESISTOR	1	
QR309		MRN1402	TRANSISTOR-RESISTOR	1	
QR310		MRN1404	TRANSISTOR-RESISTOR	1	
QR311		MRN2404	TRANSISTOR-RESISTOR	1	
QR312		MRN2402	TRANSISTOR-RESISTOR	1	
QR313,14		MRN1404	TRANSISTOR-RESISTOR	2	
QR315		MRN2404	TRANSISTOR-RESISTOR	1	
QR316,17		XN6213	TRANSISTOR-RESISTOR	2	
QR318		MRN1402	TRANSISTOR-RESISTOR	1	
QR319,20		MRN1404	TRANSISTOR-RESISTOR	2	
QR802		MRN1404	TRANSISTOR-RESISTOR	1	
QR803		MRN1403	TRANSISTOR-RESISTOR	1	
QR805		MRN1404	TRANSISTOR-RESISTOR	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
QR806		XN6213	TRANSISTOR-RESISTOR	1	
QR1001,02		MUN2211	TRANSISTOR-RESISTOR	2	
QR2001		XN1213	TRANSISTOR-TRANSISTOR	1	
QR2002		MUN2113	TRANSISTOR-RESISTOR	1	
QR2501		XN1211	TRANSISTOR-RESISTOR	1	
QR3001,02		MUN2212	TRANSISTOR-RESISTOR	2	
QR3003		MUN2111	TRANSISTOR-RESISTOR	1	
QR3301-04		DTC363EK	TRANSISTOR-RESISTOR	4	
QR3305		UN211D	TRANSISTOR-RESISTOR	1	
QR3306		DTC363EK	TRANSISTOR-RESISTOR	1	
QR3307		MRN1404	TRANSISTOR-RESISTOR	1	
QR3402		MRN2402	TRANSISTOR-RESISTOR	1	
QR3403		MRN1403	TRANSISTOR-RESISTOR	1	
QR3404		XN4212	TRANSISTOR-TRANSISTOR	1	
QR3405		MRN1403	TRANSISTOR-RESISTOR	1	
QR3406-08		XN1212	TRANSISTOR-RESISTOR	3	
QR3409,10		MRN1403	TRANSISTOR-RESISTOR	2	
QR3411		MRN1402	TRANSISTOR-RESISTOR	1	
QR3412		MRN1404	TRANSISTOR-RESISTOR	1	
QR3415		XN4212	TRANSISTOR-TRANSISTOR	1	
QR3416		XN1212	TRANSISTOR-RESISTOR	1	
QR3417		XN4212	TRANSISTOR-TRANSISTOR	1	
QR3418		MRN1402	TRANSISTOR-RESISTOR	1	
QR3901-03		MRN1404	TRANSISTOR-RESISTOR	3	
QR3904,05		MRN1402	TRANSISTOR-RESISTOR	2	
QR3906		MRN1404	TRANSISTOR-RESISTOR	1	
QR4001		MUN2212	TRANSISTOR-RESISTOR	1	
QR4002,03		DTC363EK	TRANSISTOR-RESISTOR	2	
QR4004,05		MUN2213	TRANSISTOR-RESISTOR	2	
QR4508,09		UN5113	TRANSISTOR-RESISTOR	2	
QR4510		UN5212	TRANSISTOR-RESISTOR	1	
QR4602		UN5111	TRANSISTOR-RESISTOR	1	
QR4603		UN5213	TRANSISTOR-RESISTOR	1	
QR4701-03		MRN1403	TRANSISTOR-RESISTOR	3	
QR4704		MRN1404	TRANSISTOR-RESISTOR	1	
QR6001		MUN2211	TRANSISTOR-RESISTOR	1	
QR6002,03		MUN2111	TRANSISTOR-RESISTOR	2	
QR6004		MUN2211	TRANSISTOR-RESISTOR	1	
QR6009		XN1213	TRANSISTOR-TRANSISTOR	1	
QR6012		MUN2213	TRANSISTOR-RESISTOR	1	
QR6013		MUN2212	TRANSISTOR-RESISTOR	1	
QR6014		MUN2213	TRANSISTOR-RESISTOR	1	
QR6015		MUN2111	TRANSISTOR-RESISTOR	1	
QR7403		MUN2214	TRANSISTOR-RESISTOR	1	
QR7405		MUN2213	TRANSISTOR-RESISTOR	1	
QR7901,02		UN5213	TRANSISTOR-RESISTOR	2	
QR7903		UN5112	TRANSISTOR-RESISTOR	1	
QR7904		UN5214	TRANSISTOR-RESISTOR	1	
QR7905,06		UN5213	TRANSISTOR-RESISTOR	2	
QR71001		MRN1404	TRANSISTOR-RESISTOR	1	
R301		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R303		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R304		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R305,06		ERJ6GMZOROO	M.RESISTOR CH 1/10W 0	2	
R307		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R308		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R309		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R310		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R311		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R312		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R313		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R314		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R315		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R316		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R317		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R318		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	1	
R319		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R320		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R321		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R322		ERJ6GMYG123	M.RESISTOR CH 1/10W 12K	1	
R323		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R324		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R325		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R326		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R327		ERJ6GMYG432	M.RESISTOR CH 1/10W 4.3K	1	
R328		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R329		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R330		ERJ6GMYG432	M.RESISTOR CH 1/10W 4.3K	1	
R331		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R332		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R333		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R334		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R335		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R336		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R337		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R338,39		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R340		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R341		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R342		ERJ6GMYJ181	M.RESISTOR CH 1/10W 180	1	
R343		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R344		ERJ6GMYJ911	M.RESISTOR CH 1/10W 910	1	
R345		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R346		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R347		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R348		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R349		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R350		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R351		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R352		ERJ6GMYG183	M.RESISTOR CH 1/10W 18K	1	
R353		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R354		ERJ6GMYG753	M.RESISTOR CH 1/10W 75K	1	
R355		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R356		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R357		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R358		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R359		ERJ6GMYJ181	M.RESISTOR CH 1/10W 180	1	
R360,61		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R0702		ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	1	
R0703		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R0704		ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
R0705		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R0706,07		ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	2	
R0708		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R0709		ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
R0710		ERJ6GEYJ154	M.RESISTOR CH 1/10W 150K	1	
R0713		ERJ3GEYJ301	M.RESISTOR CH 1/16W 300	1	
R0714		ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1	
R0715		ERJ3GEYJ183	M.RESISTOR CH 1/16W 18K	1	
R0716		VREO040E151	M.RESISTOR CH 1/10W 150	1	
R0717		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R0718		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R0719		ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R0720		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R0722		ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
R0723		ERJ3GEYJ271	M.RESISTOR CH 1/16W 270	1	
R0724		ERJ3GEYJ183	M.RESISTOR CH 1/16W 18K	1	
R0725		ERJ3GEYJ182	M.RESISTOR CH 1/16W 1.8K	1	
R0726		ERJ3GEYG431	M.RESISTOR CH 1/16W 430	1	
R0727		ERJ3GEYG182	M.RESISTOR CH 1/16W 1.8K	1	
R0728		ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R0729		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R0732		ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R0783		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	1	
R802		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R803		ERJ6GMYJ242	M.RESISTOR CH 1/10W 2.4K	1	
R804,05		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R809		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R810,11		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R814		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R815		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R816		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R817		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R818		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R820		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R821,22		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R824		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R825		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R826		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	1	
R827		ERJ6GMYJ154	M.RESISTOR CH 1/10W 150K	1	
R828		ERJ6GMYJ204	M.RESISTOR CH 1/10W 200K	1	
R829		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R830		ERJ6GMYJ154	M.RESISTOR CH 1/10W 150K	1	
R831		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	1	
R832		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R833		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R834		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R835,36		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	2	
R837		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R838,39		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	2	
R840		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R841		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R842,43		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	2	
R844		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R845		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R846		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R847		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R848		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R849		ERJ6GMYK395	M.RESISTOR CH 1/10W 3.9M	1	
R850		ERJ6GMYJ302	M.RESISTOR CH 1/10W 3K	1	
R851,52		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R853		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R1001		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R1002		ERDS1TJ822	C.RESISTOR 1/2W 8.2K	1	
R2004		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R2005		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R2011		ERJ6GMYG222	M.RESISTOR CH 1/10W 2.2K	1	
R2012		ERJ6GMYG392	M.RESISTOR CH 1/10W 3.9K	1	
R2013,14		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	2	
R2015		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R2016		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R2018		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R2019		ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R2501		ERX1SJ1R8	M.RESISTOR 1W 1.8	1	
R2502		ERJ6GMYG112	M.REISITOR CH 1/10W 1.1K	1	
R2503		ERJ6GMYG102	M.RESISTOR CH 1/10W 1K	1	
R2504		ERJ6GMYG332	M.RESISTOR CH 1/10W 3.3K	1	
R2505		VREO034E103	M.RESISTOR CH 1/10W 10K	1	
R2506		ERJ6GMYJ564	M.RESISTOR CH 1/10W 560K	1	
R2507		VREO034E103	M.RESISTOR CH 1/10W 10K	1	
R2508		VREO034E512	M.RESISTOR CH 1/10W 5.1K	1	
R2509		VREO034E472	M.RESISTOR CH 1/10W 4.7K	1	
R2510		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R2511		ERJ6GMYJ684	M.RESISTOR CH 1/10W 680K	1	
R2513		ERJ6GMYG133	M.RESISTOR CH 1/10W 13K	1	
R2514		ERJ6GMYG821	M.RESISTOR CH 1/10W 820	1	
R2515		ERG12SJ561	M.RESISTOR 1/2W 560	1	
R2516		ERJ6GMYG473	M.RESISTOR CH 1/10W 47K	1	
R2517		ERX12SJR47	M.RESISTOR 1/2W 0.47	1	
R2518		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R2519		ERJ6GMYG432	M.RESISTOR CH 1/10W 4.3K	1	
R2520		ERJ6GMYG103	M.RESISTOR CH 1/10W 10K	1	
R2521-23		ERDS2TJ560	C.RESISTOR 1/4W 56	3	
R2524		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R2525		EROS2CKG6800	M.RESISTOR 1/4W 680	1	
R2526		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R2527		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R2528		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R2529		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R2530		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R2531,32		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	2	
R2533		ERJ6GMYJ393	M.RESISTOR CH 1/10W 39K	1	
R2534		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R2535		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R2536		ERJ6GMYJ824	M.RESISTOR CH 1/10W 820K	1	
R2537		ERJ6GMYJ393	M.RESISTOR CH 1/10W 39K	1	
R2538		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R2539		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	1	
R2540		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R2541		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R3001,02		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	2	
R3003		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R3004		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	1	
R3005		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R3006,07		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R3008		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3009		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3010		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3011		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3012		ERJ6GMYG911	M.RESISTOR CH 1/10W 910	1	
R3013		ERJ6GMYG102	M.RESISTOR CH 1/10W 1K	1	
R3014		ERJ6GMYG471	M.RESISTOR CH 1/10W 470	1	
R3015		ERJ6GMYG102	M.RESISTOR CH 1/10W 1K	1	
R3016		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3017		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3018		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R3019		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R3021		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3022		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R3023		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R3024		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	1	
R3025		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R3026,27		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R3301		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3302		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R3303		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3304		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R3305		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3306		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R3307		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3308		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3310		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3322		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R3323		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R3324		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3325,26		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R3327		ERJ6GMYJ821	M.RESISTOR CH 1/10W 820	1	
R3328		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3333		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3334		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R3335		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3336,37		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	2	
R3338		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3339		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3340		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3341		ERJ6GMYJ563	M.RESISTOR CH 1/10W 56K	1	
R3342		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R3345,46		ERJ6GMYJ821	M.RESISTOR CH 1/10W 820	2	
R3347		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R3352		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3353		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R3401		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3402		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R3403		ERJ6GMYG361	M.RESISTOR CH 1/10W 360	1	
R3404		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3405		ERJ6GMYG123	M.RESISTOR CH 1/10W 12K	1	
R3406		ERJ6GMYG512	M.RESISTOR CH 1/10W 5.1K	1	
R3407		ERJ6GMYG272	M.RESISTOR CH 1/10W 2.7K	1	
R3408		ERJ6GMYG302	M.RESISTOR CH 1/10W 3K	1	
R3409		ERJ6GMYG821	M.RESISTOR CH 1/10W 820	1	
R3410		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3411-13		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	3	
R3415		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3417		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3422		ERJ6GMYG333	M.RESISTOR CH 1/10W 33K	1	
R3423		ERJ6GMYG683	M.RESISTOR CH 1/10W 68K	1	
R3424		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3425		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R3426		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R3427		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3428		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R3429		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3430		ERJ6GMYJ823	M.RESISTOR CH 1/10W 82K	1	
R3431		ERJ6GMYG821	M.RESISTOR CH 1/10W 820	1	
R3433		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3434		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3435		ERJ6GMYG302	M.RESISTOR CH 1/10W 3K	1	
R3436		ERJ6GMYG272	M.RESISTOR CH 1/10W 2.7K	1	
R3437		ERJ6GMYG512	M.RESISTOR CH 1/10W 5.1K	1	
R3438		ERJ6GMYG123	M.RESISTOR CH 1/10W 12K	1	
R3441		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R3442		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3443		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R3444,45		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	2	
R3446,47		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R3463		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3464		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3465		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R3466		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3467		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R3468,69		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	2	
R3470		ERJ6GMYG123	M.RESISTOR CH 1/10W 12K	1	
R3471		ERJ6GMYG512	M.RESISTOR CH 1/10W 5.1K	1	
R3472		ERJ6GMYG272	M.RESISTOR CH 1/10W 2.7K	1	
R3473		ERJ6GMYG302	M.RESISTOR CH 1/10W 3K	1	
R3474		ERJ6GMYG821	M.RESISTOR CH 1/10W 820	1	
R3475		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3476		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3477,78		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R3479		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3501		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3502		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R3503		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3504,05		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R3506		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R3507		ERJ6GMYG103	M.RESISTOR CH 1/10W 10K	1	
R3508		ERJ6GMYG332	M.RESISTOR CH 1/10W 3.3K	1	
R3509-11		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	3	
R3513,14		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	2	
R3515		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3516		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3517		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3518		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3519		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3520		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3521		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R3522		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3523		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R3524		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3525		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R3526		ERJ6GMYJ470	M.RESISTOR CH 1/10W 47	1	
R3601		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3602		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3603		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3604		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3605		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R3606		ERJ6GMYJ821	M.RESISTOR CH 1/10W 820	1	
R3607-12		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	6	
R3613		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R3614		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3616		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3901-05		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	5	
R3906		ERDS1TJ750	C.RESISTOR 1/2W 75	1	
R3908,09		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	2	
R3910,11		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	2	
R3913		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R3914		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	1	
R3915		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R3916,17		ERDS2TJ181	C.RESISTOR 1/4W 180	2	
R3926		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3927,28		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R3929		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3930		ERJ6GMYJ112	M.RESISTOR CH 1/10W 1.1K	1	
R3931		ERJ6GMYJ123	M.RESISTOR CH 1/10W 12K	1	
R3932		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R3933		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R3934		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R3935		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3936		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R3938		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3945		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R3946		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R3950,51		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	2	
R3953		ERDS2TJ562	C.RESISTOR 1/4W 5.6K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R3954		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R3955		ERJ6GMYJ123	M.RESISTOR CH 1/10W 12K	1	
R3956		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R3957-60		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	4	
R3961		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	1	
R3962		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3963		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3964		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R3965		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3966		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3967		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3968		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4001,02		ERDS2TJ680	C.RESISTOR 1/4W 68	2	
R4003-08		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	6	
R4009		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R4010		ERJ6GMYG433	M.RESISTOR CH 1/10W 43K	1	
R4011		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R4012		ERJ6GMYJ242	M.RESISTOR CH 1/10W 2.4K	1	
R4013		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R4014		ERJ6GMYG100	M.RESISTOR CH 1/10W 10	1	
R4015		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R4020		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R4021		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R4022		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R4028		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R4029,30		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R4033		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R4034		ERJ6GMYG393	M.RESISTOR CH 1/10W 39K	1	
R4035		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R4036		ERJ6GMYG393	M.RESISTOR CH 1/10W 39K	1	
R4501,02		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R4503		ERJ3GEYG223	M.RESISTOR CH 1/16W 22K	1	
R4504,05		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	2	
R4506,07		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	2	
R4508		ERJ3GEYG224	M.RESISTOR CH 1/16W 220K	1	
R4509		ERJ3GEYJ622	M.RESISTOR CH 1/16W 6.2K	1	
R4511		ERJ3GEYG273	M.RESISTOR CH 1/16W 27K	1	
R4512		VRE0071E163	M.RESISTOR CH 1/10W 16K	1	
R4513		ERJ3GEYG103	M.RESISTOR CH 1/16W 10K	1	
R4514,15		ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	2	
R4518,19		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R4522		ERJ3GEYJ225	M.RESISTOR CH 1/16W 2.2M	1	
R4527		VRE0071E333	M.RESISTOR 33K	1	
R4528		VRE0071E153	M.RESISTOR 15K	1	
R4529		ERJ3GEYG562	M.RESISTOR CH 1/16W 5.6K	1	
R4530		ERJ3GEYJ334	M.RESISTOR CH 1/16W 330K	1	
R4534		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R4535		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R4539		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R4541		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R4542		ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
R4543		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R4551,52		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	2	
R4553,54		ERJ3GEYJ273	M.RESISTOR CH 1/16W 27K	2	
R4558		ERJ3GEYG224	M.RESISTOR CH 1/16W 220K	1	
R4561		ERJ3GEYG273	M.RESISTOR CH 1/16W 27K	1	
R4562		VRE0034E10C	M.RESISTOR CH 1/10W	1	
R4563		ERJ3GEYG272	M.RESISTOR CH 1/16W 2.7K	1	
R4568,69		ERJ3GEYJ273	M.RESISTOR CH 1/16W 27K	2	
R4573		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R4577		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R4578		VRE0071E473	M.RESISTOR CH 1/10W 47K	1	
R4581		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R4583		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R4584		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R4585		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R4586		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R4587,88		ERJ3GEYJ273	M.RESISTOR CH 1/16W 27K	2	
R4591		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R4592		ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1	
R4593		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R4594		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R4596		ERJ3GEYG103	M.RESISTOR CH 1/16W 10K	1	
R4597		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R4598,99		ERJ3GEYG223	M.RESISTOR CH 1/16W 22K	2	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R4603		ERJ3GEYG183	M.RESISTOR CH 1/16W 18K	1	
R4606		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R4610		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R4611		ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
R4612		ERJ3GEYJ331	M.RESISTOR CH 1/16W 330	1	
R4613		ERJ3GEYJ394	M.RESISTOR CH 1/16W 390K	1	
R4615		ERJ3GEYJ133	M.RESISTOR CH 1/16W 13K	1	
R4616		ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
R4638		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R4649		ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1	
R4651		ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
R4652		ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
R4653		ERJ3GEYJ221	M.RESISTOR CH 1/16W 220	1	
R4654		ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
R4655		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R4656		ERJ3GEYG243	M.RESISTOR CH 1/16W 24K	1	
R4657		ERJ3GEYJ392	M.RESISTOR CH 1/16W 3.9K	1	
R4666		ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R4671		ERJ3GEYG103	M.RESISTOR CH 1/16W 10K	1	
R4701		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	1	
R4702		ERJ6GMYJ821	M.RESISTOR CH 1/10W 820	1	
R4703		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R4704,05		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	2	
R4706		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R4707		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R4708		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4709		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R4710		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4711		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R4712		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R4713		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4714		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R4715		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R4716		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4717		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R4718		ERJ6GMYG753	M.RESISTOR CH 1/10W 75K	1	
R4719		ERJ6GMYG203	M.RESISTOR CH 1/10W 20K	1	
R4720,21		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	2	
R4722		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R4723		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R4724,25		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	2	
R4901,02		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	2	
R4903,04		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	2	
R4905,06		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	2	
R4907,08		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	2	
R4909,10		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R4915-18		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	4	
R4921		ERJ6GMYG163	M.RESISTOR CH 1/10W 16K	1	
R4922,23		ERJ6GMYG433	M.RESISTOR CH 1/10W 43K	2	
R4924		ERJ6GMYG163	M.RESISTOR CH 1/10W 16K	1	
R4925		ERJ6GMYG473	M.RESISTOR CH 1/10W 47K	1	
R4926		ERJ6GMYG223	M.RESISTOR CH 1/10W 22K	1	
R4929		ERJ6GMYG223	M.RESISTOR CH 1/10W 22K	1	
R4930		ERJ6GMYG473	M.RESISTOR CH 1/10W 47K	1	
R6001		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6002,03		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	2	
R6004		ER0S2CKG2000	M.RESISTOR 1/4W 200	1	
R6005		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R6006		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6007-09		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	3	
R6010,11		ERJ6GMYG223	M.RESISTOR CH 1/10W 22K	2	
R6012		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6013		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6015,16		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6017		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6018		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6019		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6020,21		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6022-24		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	3	
R6025		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R6027		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R6028		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R6029		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R6030		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R6031		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R6032,33		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	2	
R6034		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6035		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R6036		ERJ6GMYJ123	M.RESISTOR CH 1/10W 12K	1	
R6037,38		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R6039,40		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	2	
R6041		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	1	
R6042		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R6044-49		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	6	
R6050		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6051		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R6052		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R6053		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R6054		ERJ6GMZOROO	M.RESISTOR CH 1/10W 0	1	
R6055		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R6056,57		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	2	
R6058,59		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6060		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6061,62		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	2	
R6063		ERJ6GMYJ224	M.RESISTOR CH 1/10W 220K	1	
R6064		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R6066		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6067		ERJ6GMYJ181	M.RESISTOR CH 1/10W 180	1	
R6068-70		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	3	
R6071		ERDS2TJ391	C.RESISTOR 1/4W 390	1	
R6074		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R6075		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6076		ERJ6GMYJ563	M.RESISTOR CH 1/10W 56K	1	
R6077		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6078		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6079		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6081		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R6082		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6083-86		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	4	
R6087,88		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	2	
R6089,90		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6091		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6092,93		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	2	
R6094		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6096		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R6097,98		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6099		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R6100		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6101		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6102,03		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	2	
R6104		ERJ6GMZOROO	M.RESISTOR CH 1/10W 0	1	
R6106,07		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R6108		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6109		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R6110		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6112		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6113		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R6115		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6117		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6119,20		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6122		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6123		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R6124		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6125		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R7403		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R7407,08		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R7410-12		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	3	
R7413		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R7414-19		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	6	
R7420		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R7421-23		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	3	
R7425		ERJ6GMYJ154	M.RESISTOR CH 1/10W 150K	1	
R7426		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R7427		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R7428		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	1	
R7429		ERJ6GMYJ151	M.RESISTOR CH 1/10W 150	1	
R7430		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R7431-34		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	4	
R7435		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R7436		ERG1SJ222	M.RESISTOR 1W 2.2K	1	
R7437,38		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	2	
R7439		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R7440,41		ERJ6GMYJ151	M.RESISTOR CH 1/10W 150	2	
R7901		ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R7902		ERJ3GEYJ821	M.RESISTOR CH 1/16W 820	1	
R7903		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R7904		ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R7905		ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R7906		ERJ6GEYJ150	M.RESISTOR CH 1/10W 15	1	
R7907		ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R7908		ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R7909-11		ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	3	
R7913-15		ERJ3GEYJ682	M.RESISTOR CH 1/16W 6.8K	3	
R7917		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R7918-21		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	4	
R7922		ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1	
R7923		ERJ3GEYJ394	M.RESISTOR CH 1/16W 390K	1	
R7924-26		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	3	
R7927		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R7928		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R7929		ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1	
R7930		ERJ3GEYJ394	M.RESISTOR CH 1/16W 390K	1	
R7931-33		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	3	
R7934		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R7935		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R7936		ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
R7937		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	1	
R7938		ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
R7939		ERJ3GEYJ224	M.RESISTOR CH 1/16W 220K	1	
R7940		ERJ3GEYJ181	M.RESISTOR CH 1/16W 180	1	
R7941		ERJ3GEYJ681	M.RESISTOR CH 1/16W 680	1	
R7942		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	1	
R7943		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R7944		ERJ3GEYJ392	M.RESISTOR CH 1/16W 3.9K	1	
R7945		ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	1	
R7946,47		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	2	
R7948		ERJ3GEYJ182	M.RESISTOR CH 1/16W 1.8K	1	
R7949		ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	1	
R7950		ERJ3GEYJ182	M.RESISTOR CH 1/16W 1.8K	1	
R7951		ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	1	
R7956		ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	1	
R7957		ERJ3GEYJ182	M.RESISTOR CH 1/16W 1.8K	1	
R7958,59		ERJ3GEYJ823	M.RESISTOR CH 1/16W 82K	2	
R7960,61		ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	2	
R7962,63		ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	2	
R7964		ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	1	
R7969-72		ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	4	
R7973-77		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	5	
R7978		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R7979		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R7980		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R7981,82		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	2	
R7983		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R7985		ERJ3GEYJ820	M.RESISTOR CH 1/16W 82	1	
R7987		ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1	
R7988		ERJ3GEYJ121	M.RESISTOR CH 1/16W 120	1	
R7989		ERDS2TJ823	C.RESISTOR 1/4W 82K	1	
R71001		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R71002		ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R71003		ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R71004		ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R71005		ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R71006		ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R71007		ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R71008		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R71009,10		ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	2	
R71011-14		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	4	
R71016		ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R71017		ERJ6GEYJ393	M.RESISTOR CH 1/10W 39K	1	
R71018		ERJ6GEYJ823	M.RESISTOR CH 1/10W 82K	1	
R71019		ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	
RX3401		EXBF8E102J	COMBI. R-R	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
SW3901		VSS0385	SWITCH	1	
T0703		EQV5EC071A	TRANSFORMER	1	
T0704		EQV5EC072A	TRANSFORMER	1	
T0711		EQS5EC032A	TRANSFORMER	1	
T4701		VLT0695	TRANSFORMER	1	
T4702		VLT0696	TRANSFORMER	1	
VR301		EVN49CA00B23	V.RESISTOR 2K	1	
VR302		EVN49CA00B13	V.RESISTOR	1	
VR303		EVNCBAA00B13	V.RESISTOR	1	
VR304		EVN49CA00B13	V.RESISTOR	1	
VR0701		EVNCBAA00B24	V.RESISTOR	1	
VR801,02		EVMEASA00B13	V.RESISTOR	2	
VR803		EVMEASA00B14	V.RESISTOR	1	
VR804		EVN49CA00B53	V.RESISTOR	1	
VR2001-05		EVNCYAA03B54	V.RESISTOR	5	
VR3001-03		EVNCYAA03B23	V.RESISTOR	3	
VR3301		EVMEASA00B24	V.RESISTOR	1	
VR3302		EVN49CA00B54	V.RESISTOR	1	
VR3304,05		EVN49CA00B52	V.RESISTOR 500	2	
VR3307		EVN49CA00B54	V.RESISTOR	1	
VR3901		EVMEASA00B24	V.RESISTOR	1	
VR4002		EVNCYAA03B25	V.RESISTOR	1	
VR4501		EVMECSA00B53	V.RESISTOR	1	
VR4502		EVMEASA00BY4	V.RESISTOR	1	
VR4507		EVMEASA00BY4	V.RESISTOR	1	
VR4509		EVMECSA00BY3	V.RESISTOR	1	
VR4512		EVNCBAA00B52	V.RESISTOR	1	
VR4550		EVMECSA00B14	V.RESISTOR	1	
VR4551,52		EVMEASA00B55	V.RESISTOR	2	
VR7901,02		EVNCBAA00B14	V.RESISTOR	2	
VR7903		EVTEASA00B55	V.RESISTOR	1	
X0701		VLF1180	CRYSTAL OSCILLATOR	1	
X0702		EFCS6R0MS5	CRYSTAL OSCILLATOR	1	
X0703		EFCS6M65MW3B	CRYSTAL OSCILLATOR	1	
X0704		VLF1174	CRYSTAL OSCILLATOR	1	
X801		VSX0406	CRYSTAL OSCILLATOR	1	
X3302		EF0GC3584A5	CRYSTAL OSCILLATOR	1	
X3501		VSX0574	CRYSTAL OSCILLATOR	1	
X6001		VSX0583	CRYSTAL OSCILLATOR	1	
X6002		EF0EC7374T4E	CRYSTAL OSCILLATOR	1	
X7001		VSQ0565	CRYSTAL OSCILLATOR	1	
X7401		VSX0561	CRYSTAL OSCILLATOR	1	
X7901		VSX0513	CRYSTAL OSCILLATOR	1	
X7902		VSX0512	CRYSTAL OSCILLATOR	1	
X7903		EFCA6004BF	CRYSTAL OSCILLATOR	1	
X71001		VSX0557	CRYSTAL OSCILLATOR	1	
X71002		EF0GC4004A4	CRYSTAL OSCILLATOR	1	
			MISCELLANEOUS		
		VEE9564	EARTH WIRE	1	(TV DEMODU-POWER
					SHIELD CASE)
		VJH0827	RF ANT TERMINAL PLATE	1	
		ENG47211G	TUNER	1	<!>
		VEE8682	WIRE CABLE	1	(P1001-P1102)
		VEE8683	WIRE CABLE	1	(P1002-P1103)
		VEE8688	WIRE CABLE	1	(P2001-P2902)
		VEE9001	WIRE CABLE	1	(POWER TR.-P2003)
		VEE8685	WIRE CABLE	1	(P4002-P6502)
		VEE8686	WIRE CABLE	1	(P6003-P7504)
		VEE8837	WIRE CABLE	1	(P3002-P7503)
		VWJ0775	FLAT CARD CABLE	1	(P2004-P1507)
		VWJ0776	FLAT CARD CABLE	1	(P3001-P501)
		VWJ0778	FLAT CARD CABLE	1	(P7401-P7501)
		VWJ0801	FLAT CARD CABLE	1	(P7402-P7502)
		VEE9669	WIRE CABLE	1	(P4003-P1509)
		VEE8834	WIRE CABLE	1	(P3003-P9001)
		VEE8835	WIRE CABLE	1	(P6004-P9002)

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
		VMA6768	EARTH ANGLE	1	
		VJF1031	CLAMPER	1	
		VMX2233	SPACER	1	FOR SUB Y/C C.B.A.
		VEJ1465	I/O JACK PLATE	1	FOR I/O PACK C.B.A.
		XTV3+8GFZ	SCREW	4	FOR I/O PACK C.B.A.
		VSC3553	SHIELD COVER (MAIN)	1	FOR NICAM C.B.A.
		VSC3554	SHIELD COVER (TOP)	1	FOR NICAM C.B.A.
		VSC3555	SHIELD COVER (BOTTOM)	1	FOR NICAM C.B.A.
		VSC3889	PDC SHIELD COVER	1	FOR PDS C.B.A.
		VSC3890	PDC SHIELD COVER	1	FOR PDS C.B.A.
		VMZ2190	BARRIER	1	FOR PDS C.B.A.
		VMP4471	TV DEMODULATOR ANGLE	1	FOR TV DEMODU. C.B.A.
	■	VEP05176L	HEAD AMP C.B.A.		(RTL)
C503		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
C505-08		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	4	
C509		ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	
C510,11		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C512		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C513		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C514		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C515,16		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C517,18		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C519,20		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C521		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C523		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C524		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C525		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C526		VCEA0JAC221	E.CAPACITOR 6.3V 220U	1	
C527		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C531		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C532		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C533,34		ECUM1H121JCN	C.CAPACITOR CH 50V 120P	2	
C535		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C536		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C537		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C538,39		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	2	
C540		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C551		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C552-54		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C555		ECEA0JPK221	E.CAPACTIOR 6.3V 220U	1	
C556,57		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C559		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
C560,61		ECUM1H471JCN	C.CAPACITOR CH 50V 470P	2	
C562,63		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
C564		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
C565		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C566		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C567		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C569		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
IC501		AN3336SB	IC	1	
IC502		AN3370K	IC	1	
IC551		BA7743FS	IC	1	
K501		VLP0145	COIL	1	
K502		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K503,04		VLP0145	COIL	2	
K505		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K506		VLP0145	COIL	1	
K552		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
L501-03		VLQ0540K330	COIL 33UH	3	
L504		VLQ0540J5R6	COIL 5.6UH	1	
L551,52		VLQ0540K330	COIL 33UH	2	
P501		VJS3537B020G	CONNECTOR (FEMALE) 20P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
P502		VJS2603	CONNECTOR (FEMALE)	1	
Q501		MSB709	TRANSISTOR	1	
Q502		MSD601	TRANSISTOR	1	
QR501		MRN2404	TRANSISTOR-RESISTOR	1	
R501		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R502		ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R503		ERJ6GMYG752	M.RESISTOR CH 1/10W 7.5K	1	
R504		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R505		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R506		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R507		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R508		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R509-12		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	4	
R513		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R514		ERJ6GMYJ274	M.RESISTOR CH 1/10W 270K	1	
R517		ERJ6GMYJ100	M.RESISTOR CH 1/10W 10	1	
R518,19		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	2	
R520		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R521,22		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	2	
R523		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R524		VRE0034E182	M.RESISTOR CH 1/10W 1.8K	1	
R525		VRE0034E103	M.RESISTOR CH 1/10W 10K	1	
R526		ERJ6GMYG133	M.RESISTOR CH 1/10W 13K	1	
R551		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R552		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R553		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R554		ERJ6GMYJ243	M.RESISTOR CH 1/10W 24K	1	
R556		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R557		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R558		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R559,60		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	2	
R561		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R562		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R563		VRE0034E100	M.RESISTOR CH 1/10W 10	1	
R564		ERJ6GMYJ224	M.RESISTOR CH 1/10W 220K	1	
R565		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R566		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R567		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	1	
R568		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R569		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R570		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
			MISCELLANEOUS		
		VSC3714	SHIELD COVER (TOP)	1	
		VSC3478	SHIELD COVER (MAIN)	1	
		VSC3715	SHIELD COVER (BOTTOM)	1	
	■	VEP07739AC	TIMER C.B.A.		(RTL)
C1701		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C1702		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C1703		ECKD2H471KB	C.CAPACITOR 500V 470P	1	
C1704		ECEA1VKA220	E.CAPACITOR 35V 22U	1	
C1705		ECKF1H103ZF	C.CAPACITOR 50V 0.01U	1	
C1706		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7501		ECRHC030E11	TRIMMER 3P	1	
C7502		ECEA0JKS330	E.CAPACITOR 6.3V 33U	1	
C7503		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7504		ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	1	
C7505,06		ECEA1EKS4R7	E.CAPACITOR 25V 4.7U	2	
C7507,08		ECUM1H473ZFN	C.CAPACITOR CH 50V 0.047U	2	
C7509		ECUM1H060DCN	C.CAPACITOR CH 50V 6P	1	
C7510		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C7511		ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
C7512		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C7513		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C7514,15		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C7517		ECEA0JKS470	E.CAPACITOR 6.3V 47U	1	
C7518		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7519-30		ECUM1H270JCN	C.CAPACITOR CH 50V 27P	12	
C7531,32		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C7533-36		ECUM1H270JCN	C.CAPACITOR CH 50V 27P	4	
C7537		ECEA1HKA220	E.CAPACITOR 50V 22U	1	
C7538		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7539		ECUM1H561JCN	C.CAPACITOR CH 50V 560P	1	
D1701		MA1270-H	DIODE	1	
D1702		MA185	DIODE	1	
D7501		MA3075	DIODE	1	
D7502-06		MA221	DIODE	5	
D7510		MA221	DIODE	1	
D7512		MA221	DIODE	1	
D7514		MA221	DIODE	1	
D7516-18		MA221	DIODE	3	
D7520-22		MA221	DIODE	3	
D7526		MA221	DIODE	1	
D7534		MA221	DIODE	1	
D7546-53		MA221	DIODE	8	
D7556-60		LN81RCPHL	LED	5	
D7562,63		MA221	DIODE	2	
DP7501		VSL0276	DISPLAY TUBE	1	
IC7501		M37502V4CF	IC	1	
IC7502		PST7026	IC	1	
IC7503		XLJ9021B	IC	1	
IC7504		PST7043	IC	1	
IC7505		BA6810S	IC	1	
K7502		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K7504,05		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	2	
L7501		VLQEL05S101K	COIL 100UH	1	
L7502		VLQ0188J330	COIL 33UH	1	
P7501,02		VJS3537A020G	CONNECTOR (FEMALE) 20P	2	
P7503		VJP3234B010	CONNECTOR (MALE) 10P	1	
P7504		VJP1246T	CONNECTOR (MALE) 6P	1	
P7505,06		VJS2183	CONNECTOR (FEMALE)	2	
PP7501,02		VJP3405A011W	CONNECTOR (MALE) 11P	2	
Q1701		2SD1994A	TRANSISTOR	1	
Q7501,02		MSD601	TRANSISTOR	2	
QR7501,02		MRN2403	TRANSISTOR-RESISTOR	2	
QR7503		MRN2402	TRANSISTOR-RESISTOR	1	
QR7506		MRN1402	TRANSISTOR-RESISTOR	1	
QR7507		MRN1404	TRANSISTOR-RESISTOR	1	
QR7508-11		MRN2404	TRANSISTOR-RESISTOR	4	
QR7512-14		MRN2403	TRANSISTOR-RESISTOR	3	
R1701		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R1702		ERDS2TJ101	C.RESISTOR 1/4W 100	1	
R1703		ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R7501,02		ERJ6GEYJ820	M.RESISTOR CH 1/10W 82	2	
R7503		ERJ6GEYG223	M.RESISTOR CH 1/10W 22K	1	
R7504		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R7505-07		ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	3	
R7508		ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R7509		ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	1	
R7510		ERJ6GEYK106	M.RESISTOR CH 1/10W 10M	1	
R7511		ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	1	
R7512,13		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R7514-16		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	3	
R7517,18		ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	2	
R7519-22		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	4	
R7525,26		ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	2	
R7527-29		ERJ6GMZOROO	M.RESISTOR CH 1/10W 0	3	
R7531-41		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	11	
R7542-56		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	15	
R7557-59		ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	3	
R7560-62		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	3	
R7564		ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R7565		ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R7566		ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R7567		ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R7568		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7569		ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R7570		ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R7571		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7572		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R7573		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7574		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
RX7501,02		EXBF6E104J	RESISTOR-RESISTOR	2	
RX7503		EXBF8E104J	COMBI.R-R 100K	1	
SW7501		ESD172255	SWITCH	1	
SW7502,03		ESD172355	SWITCH	2	
SW7504-07		ESD172255	SWITCH	4	
SW7508,09		ESD172355	SWITCH	2	
SW7510		ESD172255	SWITCH	1	
T1701		ETE13K80AY	TRANSFORMER	1	
VR4004		EVNCBAA00B53	V.RESISTOR	1	
X7501		VSX0506	CRYSTAL OSCILLATOR	1	
X7502		VSX0094	CRYSTAL OSCILLATOR	1	
			MISCELLANEOUS		
		VMD0504	LED HOLDER	5	
		VJF1043	FIP HOLDER	1	
	■	VEP06B45A	VR C.B.A.		(RTL)
C6501,02		ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	2	
C6503,04		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C6505		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C6506		VCEA1HAC3R3	E.CAPACITOR 50V 3.3U	1	
C6507		ECEA1AKA330	E.CAPACITOR 10V 33U	1	
C6508		ECEA1CKA330	E.CAPACITOR 16V 33U	1	
C6509		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6510		ECEA0JK470	E.CAPACITOR 6.3V 47U	1	
C6511-14		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	4	
C6515,16		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
C6518		ECUM1H472KBN	C.CAPACITOR CH 50V 4700P	1	
C6519		ECKF1H472KB	C.CAPACITOR 50V 4700P	1	
IC6501		VCR0172	IC	1	
IR6501		VEK6407	IR RECEIVER UNIT	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
L6501,02		ELESE471KA	COIL	2	
L6503,04		ELESE221KA	COIL 220UH	2	
L6506,07		ELESE101KA	COIL 100UH	2	
LB6501		VLP0145	COIL	1	
LB6502		VLP0150	INDUCTOR	1	
P6502		VJP1251T	CONNECTOR (MALE) 11P	1	
PS6501,02		VJS3405A011A	CONNECTOR (FEMALE) 11P	2	
R6501		ERJ6GEYG332	M.RESISTOR CH 1/10W 3.3K	1	
R6502		ERJ6GEYG331	M.RESISTOR CH 1/10W 330	1	
R6503,04		ERJ6GEYG271	M.RESISTOR CH 1/10W 270	2	
R6505		ERJ6GEYG332	M.RESISTOR CH 1/10W 3.3K	1	
R6506		ERJ6GEYG331	M.RESISTOR CH 1/10W 330	1	
R6508,09		ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	2	
R6511		ERDS2TYJ470	C.RESISTOR	1	
S6501,02		EVQ11409K	SWITCH	2	
VR6501		EWAKABX15C23	V.RESISTOR	1	
VR6502		EWAKFKX15B24	V.RESISTOR	1	
VR6503		EWANYJX1054J	V.RESISTOR	1	
			MISCELLANEOUS		
		VEJ1429	FRONT JACK	1	
		VYC0599	HIFI REC VR COVER UNIT	1	
		VGU4495	HIFI REC VR KNOB	2	
	■	VEP03A53A	TBC C.B.A.		(RTL)
C9001		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9002		ECQB1H473JZ	F.CAPACITOR 50V 0.047U	1	
C9003		ECEA1HKN010	E.CAPACITOR 50V 1U	1	
C9004		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C9005		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9006		ECEA1HKAR47	E.CAPACITOR 50V 0.47U	1	
C9007		ECQB1H473JZ	F.CAPACITOR 50V 0.047U	1	
C9008		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9009		ECQB1H473JZ	F.CAPACITOR 50V 0.047U	1	
C9010		ECEA1EKA4R7	E.CAPACITOR 25V 4.7U	1	
C9011		ECQB1H333KZ	F.CAPACITOR 50V 0.033U	1	
C9012		ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	
C9013		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C9014		ECEA1HKAR47	E.CAPACITOR 50V 0.47U	1	
C9015		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9016		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C9017		ECQB1H223KF	P.CAPACITOR 50V 0.022U	1	
C9018		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C9019		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9020,21		ECEA1HKA2R2	E.CAPACITOR 50V 2.2U	2	
C9022		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9023		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9024		ECEA1EKA4R7	E.CAPACITOR 25V 4.7U	1	
C9025		ECUM1H152KBN	C.CAPACITOR CH 50V 1500P	1	
C9026		ECUM1H331JCN	C.CAPACITOR CH 50V 330P	1	
C9027		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9028		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9029		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9030		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9031,32		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C9033		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C9034		ECUM1H270JCN	C.CAPACITOR CH 50V 27P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C9035		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9036,37		ECEA1EKN4R7	E.CAPACITOR 25V 4.7U	2	
C9038		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9039		ECEA0JKA220	E.CAPACITOR 6.3V 220U	1	
C9040		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9041		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9042		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9043-50		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	8	
C9051		ECEA0JKA220	E.CAPACITOR 6.3V 220U	1	
C9052		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9054		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9055		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9056		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9057		ECEA0JKA220	E.CAPACITOR 6.3V 220U	1	
C9058		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9059		ECEA0JKA220	E.CAPACITOR 6.3V 220U	1	
C9060		ECUM1H050CCN	C.CAPACITOR CH 50V 5P	1	
C9061		ECUM1H020CCN	C.CAPACITOR CH 50V 2P	1	
C9062		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C9063		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C9064		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9065		ECUM1H682KBN	C.CAPACITOR CH 50V 6800P	1	
C9066		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9067-70		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	4	
C9071		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9072		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9073		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9076		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9077		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9078		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9079		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9080		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9081,82		ECEA0JKA470	E.CAPACITOR 6.3V 47U	2	
C9083,84		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C9085,86		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C9087		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9088		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9089		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9098-00		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C9101		ECEA0JKA220	E.CAPACITOR 6.3V 220U	1	
C9102		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9103		ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	
C9501		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9502,03		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	2	
C9504		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C9505		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9506		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C9507,08		ECEA1CKA100	E.CAPACITOR 16V 10U	2	
C9509,10		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C9511		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C9512		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9513		ECEA1HKAR22	E.CAPACITOR 50V 0.22U	1	
C9514		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9515		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9516		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C9517		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C9518		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C9519		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9520-22		ECEA1CKA100	E.CAPACITOR 16V 10U	3	
C9523,24		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C9525,26		ECEA1CKA100	E.CAPACITOR 16V 10U	2	
D9501		1SS254	DIODE	1	
FL9001-05		VLF0633	FILTER	5	
FL9006		VLF0634	FILTER	1	
FL9007		ELKAW103EB	FILTER	1	
FL9008		VLF0634	FILTER	1	
FL9009		VLF0839	FILTER	1	
FL9010		VLF0838	FILTER	1	
FL9011		VLF0874	FILTER	1	
FL9012		VLF0855	FILTER	1	
FL9013		ELB4P034	FILTER	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
FL9014		VLF0875	FILTER	1	
FL9015-18		VLF0634	FILTER	4	
FL9019-21		VLF0630	FILTER	3	
FL9022-26		ELKAW103EB	FILTER	5	
FL9501		ELB4H054	FILTER	1	
IC9001		AN3942SB	IC	1	
IC9002		AN3496S	IC	1	
IC9003		MN74HC4066S	IC	1	
IC9004		HA19211BNT	IC	1	
IC9006		AN3915S	IC	1	
IC9007		SC371020FU	IC	1	
IC9008		SC371026FU	IC	1	
IC9501		CXL1009P	IC	1	
IC9502		AN78L09	IC	1	
IC9503		M52055FP	IC	1	
K9001		ERJ6GMZOROO	M.RESISTOR CH 1/10W 0	1	
K9004		ERJ6GMZOROO	M.RESISTOR CH 1/10W 0	1	
K9006,07		ERJ6GMZOROO	M.RESISTOR CH 1/10W 0	2	
K9010,11		ERJ6GMZOROO	M.RESISTOR CH 1/10W 0	2	
K9014		ERJ6GMZOROO	M.RESISTOR CH 1/10W 0	1	
K9016		ERJ6GMZOROO	M.RESISTOR CH 1/10W 0	1	
K9018,19		ERJ6GMZOROO	M.RESISTOR CH 1/10W 0	2	
L9001		VLQEL05S220J	COIL 22UH	1	
L9002,03		ELESE101K	COIL 100UH	2	
L9004		ELESN680KA	COIL 680UH	1	
L9005		ELESN270KA	COIL 27UH	1	
L9006		VLQ0188J2R2	COIL 2.2UH	1	
L9007		ELESE101K	COIL 100UH	1	
L9008,09		VLQ0188J2R2	COIL 2.2UH	2	
L9010		VLQ0188J6R8	COIL 6.8UH	1	
L9011-14		VLQ0188J2R2	COIL 2.2UH	4	
L9018,19		VLP0054	COIL	2	
L9024		VLP0054	COIL	1	
L9501		ELESE101K	COIL 100UH	1	
L9502		VLP0054	COIL	1	
L9503		VLP0053	COIL	1	
L9504,05		ELESE101K	COIL 100UH	2	
L9506		VLP0054	COIL	1	
P9001		VJP1393T	CONNECTOR (MALE) 13P	1	
P9002		VJP1235T	CONNECTOR (MALE) 8P	1	
Q9001		MSB709	TRANSISTOR	1	
Q9003,04		MSD601	TRANSISTOR	2	
Q9006-09		MSD601	TRANSISTOR	4	
Q9010,11		MSB709	TRANSISTOR	2	
Q9012		MSD601	TRANSISTOR	1	
Q9013		MSB709	TRANSISTOR	1	
Q9014		2SA1022	TRANSISTOR	1	
Q9015		MSD601	TRANSISTOR	1	
Q9016		MSC2295	TRANSISTOR	1	
Q9017		MSD601	TRANSISTOR	1	
Q9018		MSB709	TRANSISTOR	1	
Q9019		MSD601	TRANSISTOR	1	
Q9020		MSC2295	TRANSISTOR	1	
Q9021		MSD601	TRANSISTOR	1	
Q9022		MSB709	TRANSISTOR	1	
Q9023		MSD601	TRANSISTOR	1	
Q9024		MSB709	TRANSISTOR	1	
Q9025		MSD601	TRANSISTOR	1	
Q9026,27		MSB709	TRANSISTOR	2	
Q9501,02		MSC2295	TRANSISTOR	2	
Q9503		MSB709	TRANSISTOR	1	
Q9504		MSD601	TRANSISTOR	1	
Q9505		MSB709	TRANSISTOR	1	
Q9506		MSD601	TRANSISTOR	1	
Q9507		MSB709	TRANSISTOR	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
QR9001		MRN1404	TRANSISTOR-RESISTOR	1	
QR9004		MRN1404	TRANSISTOR-RESISTOR	1	
QR9007		MRN1404	TRANSISTOR-RESISTOR	1	
QR9010		MRN1404	TRANSISTOR-RESISTOR	1	
R9001-04		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	4	
R9005		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9006		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R9007,08		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R9009		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R9010-17		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	8	
R9021-23		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	3	
R9024		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R9027-29		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	3	
R9030		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	1	
R9031		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R9032		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R9037		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R9038		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R9039		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R9040		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	1	
R9041		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R9042		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R9043		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9044		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	1	
R9045		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9046		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R9047,48		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R9049		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	1	
R9050		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R9051,52		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	2	
R9053		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R9054,55		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	2	
R9056		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R9057		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R9058		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R9059,60		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R9061		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	1	
R9062		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R9063		ERJ6GMYJ202	M.RESISTOR CH 1/10W 2K	1	
R9064		ERJ6GMYJ132	M.RESISTOR CH 1/10W 1.3K	1	
R9065		ERJ6GMYJ432	M.RESISTOR CH 1/10W 4.3K	1	
R9066		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	1	
R9067		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R9068-70		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	3	
R9071		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R9072		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R9073		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9074		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R9075		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9076		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R9077		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R9078		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R9079		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R9080,81		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R9082		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R9084		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9087		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R9088		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R9093		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R9094		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9095		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R9096		ERJ6GMYJ123	M.RESISTOR CH 1/10W 12K	1	
R9097		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R9098		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R9099		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R9100,01		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R9104		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R9105		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R9106		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R9107		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R9108,09		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R9501,02		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	2	
R9503,04		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R9505		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R9506		ERJ6GMYJ224	M.RESISTOR CH 1/10W 220K	1	
R9507		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	1	
R9508		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R9509-13		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	5	
R9514,15		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	2	
R9516		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9517,18		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	2	
R9519		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R9520		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
VR9001		EVMF6SA00B23	V.RESISTOR 2K	1	
VR9002		EVNCYAA03B54	V.RESISTOR	1	
VR9003		EVMF6SA00B13	V.RESISTOR	1	
VR9004		EVNCYAA03B24	V.RESISTOR	1	
VR9005,06		EVMF6SA00B14	V.RESISTOR 10K	2	
VR9007		EVMF6SA00B13	V.RESISTOR	1	
VR9501		EVMF6SA00B23	V.RESISTOR 2K	1	
X9002		VSX0617	CRYSTAL OSCILLATOR	1	
X9501		VSX0323	CRYSTAL OSCILLATOR	1	
			MISCELLANEOUS		
		VSC4116	SHIELD COVER (MAIN)	1	
		VSC3620	SHIELD COVER (BOTTOM)	1	
		VSC3618	SHIELD COVER (TOP)	1	
		XTN3+6F-C	SCREW	4	
		VMX1921	SPACER	1	
	■	VEP01558C	POWER C.B.A.		(RTL) <!>
C1103		VCC0021	C.CAPACITOR	1	<!>
C1106		VCC0021	C.CAPACITOR	1	<!>
C1109		VCC0023	C.CAPACITOR	1	<!>
C1110		ECQU2A224MN	P.CAPACITOR 250V 0.22U	1	<!>
C1111		ECQU2A154MNB	P.CAPACITOR 250V 0.15U	1	<!>
C1112		ECEC2GG680	E.CAPACITOR 400V 68U	1	
C1113		ECQE6473KF	P.CAPACITOR 630V 0.047U	1	
C1114		VCK0106K121	C.CAPACITOR	1	
C1115		ECA1VXLV470	E.CAPACITOR 35V 47U	1	
C1116		ECA1CXLV101	E.CAPACITOR 16V 100U	1	
C1117		ECKF1H102KB	C.CAPACITOR 50V 1000P	1	
C1118		ECKF1H271KB	C.CAPACITOR 50V 270P	1	
C1121		ECCD2H101J	C.CAPACITOR 500V 100P	1	
C1123		ECEA1JFE560	E.CAPACITOR 63V 56U	1	
C1124		ECEA1CFE331	E.CAPACITOR 16V 330U	1	
C1125		ECEA1DFZ681	E.CAPACITOR 20V 680U	1	
C1126		ECEA1AFZ681	E.CAPACITOR 10V 680U	1	
C1127		ECEA1JFE470	E.CAPACITOR 63V 47U	1	
C1128		ECEA1CFE121	E.CAPACITOR 16V 120U	1	
C1129		ECEA1DFZ681	E.CAPACITOR 20V 680U	1	
C1130		ECEA1AFZ681	E.CAPACITOR 10V 680U	1	
C1131-34		ECKF1H102ZF	C.CAPACITOR 50V 1000P	4	
C1135,36		ECA1CGE101X	E.CAPACITOR 16V 100U	2	
C1139		ECKF1H103ZF	C.CAPACITOR 50V 0.01U	1	
C1140,41		ECA1CGE101X	E.CAPACITOR 16V 100U	2	
D1102		EM1B	DIODE	1	<!>
D1103		AP01C	DIODE	1	
D1104		MA178	DIODE	1	
D1105		1SS254	DIODE	1	
D1106		MA4200H	DIODE	1	
D1107		MA723VT	DIODE	1	
D1108		10ELS2	DIODE	1	
D1109		MA185	DIODE	1	
D1110		FMLG12SP	DIODE	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
D1111		FMBG14L	DIODE	1	
D1112		SV03YS	DIODE	1	
D1115-17		EM1B	DIODE	3	<!>
D1118		MA4056-L	DIODE	1	
D1119		1SS254	DIODE	1	
D1120		MA4120H	DIODE	1	
D1121,22		1SS254	DIODE	2	
IC1101		STRM6547LF	IC	1	<!>
IC1103		SI3120C	IC	1	
IC1104		SI-3050CA	DIODE	1	
L1101,02		ELF18D221F	COIL	2	<!>
L1103-09		EXCELSA35	COIL	7	
L1110		VLP0074	COIL	1	
L1111,12		ELESE101KA	COIL 100UH	2	
L1113,14		ELC07B009	COIL	2	
L1115,16		VLP0083	COIL	2	
P1101		VJS2625	AC INLET	1	<!>
P1102		VJP1930T	CONNECTOR (MALE)	1	
P1103		VJP1149	CONNECTOR (MALE) 3P	1	
Q1101		PC120FY	TRANSISTOR	1	<!>
Q1102		2SD1996-R	TRANSISTOR	1	
R1101		ERC12AGM334	S.RESISTOR 1/2W 330K	1	
R1102		VRE0087	M.RESISTOR 1/16W	1	
R1103		ERG3SJ823	M.RESISTOR 1/16W 82K	1	
R1104,05		ERDS2FJ224	C.RESISTOR 1/4W 220K	2	
R1106		ERDS2FJ221	C.RESISTOR 1/4W 220	1	
R1109		ERDS2FJ561	C.RESISTOR 1/4W 560	1	
R1110		ERDS2FJ391	C.RESISTOR 1/4W 390	1	
R1111		ERX1SJ1R5	M.RESISTOR 1W 1.5	1	
R1112		ERDS2FJ103	C.RESISTOR 1/4W 10K	1	
R1113		ERDS2FJ682	C.RESISTOR 1/4W 6.8K	1	
R1114		ERDS2FJ101	C.RESISTOR 1/4W 100	1	
R1115		ERDS2TJ271	C.RESISTOR 1/4W 270	1	
R1122		EROS2CKG62R0	M.RESISTOR 1/4W 62	1	
R1123		EROS2CKG3001	M.RESISTOR 1/4W 3K	1	
R1124		EROS2CKG20R0	M.RESISTOR 1/4W 20	1	
R1125		EROS2CKG1201	M.RESISTOR 1/4W 1.2K	1	
R1126		ERDS1TJ562	C.RESISTOR 1/2W 5.6K	1	
R1127		ERDS2FJ224	C.RESISTOR 1/4W 220K	1	
T1101		VLT0718	TRANSFORMER	1	<!>
			MISCELLANEOUS		
		VJF0318	FUSE HOLDER	2	<!>
		VMZ2212	CAPACITOR COVER	3	<!>
	■	----------	MECHANISM CONNECTION C.B.A.		
D1501		LN59L.VT	LED	1	
IC1501,02		ON1387	PHOTO INTERRUPTER	2	
P1503		VJS3316A002	CONNECTOR (FEMALE) 2P	1	
P1504		VJS3820	CONNECTOR (FEMALE)	1	
P1505		VJS3537B014G	CONNECTOR (FEMALE) 14P	1	
Q1501		PT493F1MN	TRANSISTOR	1	
Q1502		PN205L-NC.VT	PHOTO TRANSISTOR	1	
SW1501		VES0695	S-TAB SW	1	
SW1502		VST0176	S-VHS CASSETTE SW	1	
			MISCELLANEOUS		
		VMD2029	REEL GUIDE	1	
		VMD1926	LED HOLDER	1	D1501
		VMD1927	PHOTO TR. HOLDER	1	Q1502
	■	VEX0235	CYLINDER DRIVE C.B.A.		(RTL)
C2901-03		ECEA1VSN2R2	E.CAPACITOR 35V 2.2U	3	
C2904-06		ECUM1E104KBM	C.CAPACITOR CH 25V 0.1U	3	
C2907		ECUM1E683KBM	C.CAPACITOR CH 25V 0.068U	1	
C2908		ECUM1E473KBM	C.CAPACITOR CH 25V 0.047U	1	
C2910		ECEA1CKS100	E.CAPACITOR 16V 10U	1	
C2912		ECEA0JKS220	E.CAPACITOR 6.3V 22U	1	
IC2901		AN3815K	IC	1	
P2901		VJP2603W	CONNECTOR (MALE) 12P	1	
P2902		VJP1232T	CONNECTOR (MALE) 5P	1	

27-3. ELECTRICAL REPLACEMENT PARTS FOR NV-HS1000ECP

Note:1.Be sure to make your orders of replacement parts according to this list.
2.IMPORTANT SAFETY NOTICE : Components identified with the mark <!> have the special characteristics for safety. When replacing any of these components,use only the same type.
3.Unless otherwise specified,
All resistors are in OHMS , K=1,000 OHMS. All capacitors are in MICRO-FARADS(uf),P=uuF.
4.The P.C.Board units marked width'■'show below the main assembled parts.
5.The marking(RTL) indicates the retention time is limited for this item. After the discontinuation of this assembly in production, it will no longer be available.

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
		VEP03C01R	MAIN C.B.A.	1	(RTL) INCLUDING THE CAP DRIVE C.B.A. (VEP02412B), LUMINANCE & CHROMINANCE PACK C.B.A. (VEP03A61B), SUB LUMINANCE & CHROMINANCE PACK C.B.A. (VEP03A62B), REC/RF AMP PACK C.B.A. (VEP03A90A), INPUT/OUTPUT PACK C.B.A. (VEP03A72E), SUB AUDIO PACK C.B.A. (VEP04417B), Hi-Fi AUDIO PACK C.B.A. (VEP04447PS), DECODER PACK C.B.A. (VEP07671A), NICAM DECODER PACK C.B.A. (VEP07675D), PDC C.B.A. (VEP07709A), TV DEMODULATOR PACK C.B.A. (VEP07801B).
		VEP02412B	CAP DRIVE C.B.A.	1	(RTL) INCLUDED IN MAIN C.B.A. (VEP03C01R).
		VEP03A61B	LUMINANCE & CHROMINANCE PACK C.B.A.	1	(RTL) INCLUDED IN MAIN C.B.A. (VEP03C01R).
		VEP03A62B	SUB LUMINANCE & CHROMINANCE PACK C.B.A.	1	(RTL) INCLUDED IN MAIN C.B.A. (VEP03C01R). INCLUDING THE REC/RF AMP PACK C.B.A. (VEP03A90A).
		VEP03A90A	REC/RF AMP PACK C.B.A.	1	(RTL) INCLUDED IN SUB LUMINANCE & CHROMINANCE PACK C.B.A. (VEP03A62B).
		VEP03A72E	INPUT/OUTPUT PACK C.B.A.	1	(RTL) INCLUDED IN MAIN C.B.A. (VEP03C01R).
		VEP04417B	SUB AUDIO PACK C.B.A.	1	(RTL) INCLUDED IN MAIN C.B.A. (VEP03C01R).
		VEP04447PS	Hi-Fi AUDIO PACK C.B.A.	1	(RTL) INCLUDED IN MAIN C.B.A. (VEP03C01R).
		VEP07671A	DECODER PACK C.B.A.	1	(RTL) INCLUDED IN MAIN C.B.A. (VEP03C01R).
		VEP07675D	NICAM DECODER PACK C.B.A.	1	(RTL) INCLUDED IN MAIN C.B.A. (VEP03C01R).
		VEP07709A	PDC C.B.A.	1	(RTL) INCLUDED IN MAIN C.B.A. (VEP03C01R).
		VEP07801B	TV DEMODULATOR PACK C.B.A.	1	(RTL) INCLUDED IN MAIN C.B.A. (VEP03C01R).
		VEP05176L	HEAD AMP C.B.A.	1	(RTL)
		VEP07739AD	TIMER C.B.A.	1	(RTL)
		VEP06B45A	VR C.B.A.	1	(RTL)
		VEP03A53A	TBC C.B.A.	1	(RTL)
		VEP01558C	POWER C.B.A.	1	(RTL)<!>
		----------	MECHANISM CONNECTION C.B.A.	1	
		VEX0235	CYLINDER DRIVE C.B.A.	1	(RTL)
		----------	MOTOR C.B.A.	1	C.B.A. IS INCLUDED IN LOADING MOTOR (1) UNIT (VEM0427).
		ENG47210G	TUNER	1	<!>
F1101		XBA2C16TH15	FUSE	1	<!>
	■	VEP03C01R	MAIN C.B.A.		(RTL)
C301		ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	
C303		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C305		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C306		ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C307		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C308		ECUM1H050CCN	C.CAPACITOR CH 50V 5P	1	
C309		ECUM1H562KBN	C.CAPACITOR CH 50V 5600P	1	
C310		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C311		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C312		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C313		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C314		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C315,16		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C317		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C318		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C319		ECUM1H080DCN	C.CAPACITOR CH 50V 8P	1	
C321,22		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	2	
C324		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C325,26		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C329		ECQV1H334JM	P.CAPACITOR 50V 0.33U	1	
C331		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C332,33		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C334		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C335		ECEA0JKA220	E.CAPACITOR 6.3V 220U	1	
C336		ECEA1EKN4R7	E.CAPACITOR 25V 4.7U	1	
C337		ECEA1HKN010	E.CAPACITOR 50V 1U	1	
C338		ECEA1CKA100	E.CAPACITOR 16V 10U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C339		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C340		ECEA0JKA220	E.CAPACITOR 6.3V 22U	1	
C341		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C342		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C343		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C344		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C345,46		ECEA1CKA100	E.CAPACITOR 16V 10U	2	
C348		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C349		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C350		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C0701,02		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	2	
C0704		ECUX1H331JCV	C.CAPACITOR CH 50V 330P	1	
C0706		ECEA1HKA0R1	E.CAPACITOR 50V 0.1U	1	
C0707,08		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	2	
C0709		ECUX1H120JCV	C.CAPACITOR CH 50V 12P	1	
C0710		ECUX1H470JPV	C.CAPACITOR CH 50V 47P	1	
C0711		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C0712		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C0714		ECQB1H473JF	P.CAPACITOR 50V 0.047U	1	
C0715		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C0716		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C0717		ECUX1H270JPV	C.CAPACITOR CH 50V 27P	1	
C0718		ECEA1HKAR47	E.CAPACITOR 50V 0.47U	1	
C0719		ECUX1H270JCV	C.CAPACITOR CH 50V 27P	1	
C0720		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C0723		ECEA1HKA0R1	E.CAPACITOR 50V 0.1U	1	
C0726		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C0730		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C0732		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C802		ECUM1H471JCN	C.CAPACITOR CH 50V 470P	1	
C803		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C804		ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	
C805,06		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C808		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C809		ECEA1HKA4R7	E.CAPACITOR 50V 4.7U	1	
C810		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C811-13		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C814		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C815		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C816		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C817		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C818		ECEA1HKA0R1	E.CAPACITOR 50V 0.1U	1	
C819		ECQB1H332JZ	F.CAPACITOR 50V 3300P	1	
C820		ECUM1H331JCN	C.CAPACITOR CH 50V 330P	1	
C821-23		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C824		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C825-27		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C828,29		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	2	
C830		ECUM1H471JCN	C.CAPACITOR CH 50V 470P	1	
C831		ECUM1H270JCN	C.CAPACITOR CH 50V 27P	1	
C832		ECQV1H154JM	P.CAPACITOR 50V 0.15U	1	
C833		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C834		ECUM1H151JCN	C.CAPACITOR CH 50V 150P	1	
C835		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C836		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C1002		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C1003		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C2001		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C2003		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C2005		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C2006		ECEA1HKAR47	E.CAPACITOR 50V 0.47U	1	
C2007		ECQV1H683JM	P.CAPACITOR 50V 0.068U	1	
C2009		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C2010		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C2501-04		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	4	
C2505		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C2506		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C2507		ECQV1H683JM	P.CAPACITOR 50V 0.068U	1	
C2508-10		ECEA1HKA2R2	E.CAPACITOR 50V 2.2U	3	
C2511-14		ECUM1E333KBN	C.CAPACITOR CH 25V 0.033U	4	
C2515		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C2516		ECEA1HKAR22	E.CAPACITOR 50V 0.22U	1	
C2517		ECA0JM221	E.CAPACITOR 6.3V 220U	1	
C2518		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C2519,20		ECUM1E333KBN	C.CAPACITOR CH 25V 0.033U	2	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C2521		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C2522		ECEA1HKNR47	E.CAPACITOR 50V 0.47U	1	
C2523		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C2524,25		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	2	
C2526		ECA0JM221	E.CAPACITOR 6.3V 220U	1	
C2527		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C2528		ECEA1HKNR47	E.CAPACITOR 50V 0.47U	1	
C2529		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C2530		ECEA1HKN010	E.CAPACITOR 50V 1U	1	
C2531		ECUM1E224ZFN	C.CAPACITOR CH 25V 0.22U	1	
C2532		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C2533		ECEA0JKA330	E.CAPACOTOR 6.3V 33U	1	
C2534,35		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	2	
C3001		ECUM1H471JCN	C.CAPACITOR CH 50V 470P	1	
C3002		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C3003-06		ECEA1HKA010	E.CAPACITOR 50V 1U	4	
C3007,08		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C3009		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C3010		ECA1AM331	E.CAPACITOR 10V 330U	1	
C3011		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C3012		ECA1AM331	E.CAPACITOR 10V 330U	1	
C3013		ECA0JM331	E.CAPACITOR 6.3V 330U	1	
C3014		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C3015		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3016		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3017-19		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	3	
C3022		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3023,24		ECEA1AKA330	E.CAPACITOR 10V 33U	2	
C3027,28		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	2	
C3029		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3030		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3031		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C3032		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3033		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C3301		ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	
C3302		ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	
C3304-08		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	5	
C3309		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3310		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3312-14		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C3321		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3322		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C3323		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3324		ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C3325		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3326		ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C3327,28		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C3329		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3330		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3336		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3338		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3339		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3340		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C3341		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3342		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C3343		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3344		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C3345		ECUM1H391JCN	C.CAPACITOR CH 50V 390P	1	
C3346		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3347		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C3351,52		ECUM1H181JCN	C.CAPACITOR CH 50V 180P	2	
C3353		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C3354		ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
C3372		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C3401		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C3402		ECUM1H080DCN	C.CAPACITOR CH 50V 8P	1	
C3403-07		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	5	
C3408,09		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	2	
C3421		ECUM1H472KBN	C.CAPACITOR CH 50V 4700P	1	
C3422		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3423		ECUM1H050CCN	C.CAPACITOR CH 50V 5P	1	
C3424		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C3425		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3426		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3427		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C3428		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3429		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3430		ECEA0JKA330	E.CAPACOTOR 6.3V 33U	1	
C3431		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3443		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3444		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3445		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3447		ECUM1H121JCN	C.CAPACITOR CH 50V 120P	1	
C3448		ECUM1H151JCN	C.CAPACITOR CH 50V 150P	1	
C3449		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C3450,51		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C3452		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3472		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3473		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3474		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3475-77		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C3501		ECA0JM471	E.CAPACITOR 6.3V 470U	1	
C3502		ECRHA030E54R	TRIMMER 3P	1	
C3503		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3504		ECQB1H223JF	P.CAPACITOR 50V 0.022U	1	
C3505		ECEA1HKN010	E.CAPACITOR 50V 1U	1	
C3506		ECQB1H682JZ	F.CAPACITOR 50V 6800P	1	
C3507		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C3508		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C3509		ECUM1H122KBN	C.CAPACITOR CH 50V 1200P	1	
C3510		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3511		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C3512		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3513		ECUM1H080DCN	C.CAPACITOR CH 50V 8P	1	
C3514,15		ECEA1CKA100	E.CAPACITOR 16V 10U	2	
C3516,17		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	2	
C3518		ECEA1HKAR47	E.CAPACITOR 50V 0.47U	1	
C3519		ECUM1H221JCN	C.CAPACITOR CH 50V 220P	1	
C3520		ECEA1CKA330	E.CAPACITOR 16V 33U	1	
C3521		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3522		ECEA1CKA330	E.CAPACITOR 16V 33U	1	
C3523		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3524		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C3525-27		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C3528		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C3529		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3530		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3531		ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C3532		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3533		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C3534		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3601		ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	
C3602		ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
C3603		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3604		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C3605		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3606		ECUM1H681JCN	C.CAPACITOR CH 50V 680P	1	
C3607		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3608		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C3609		ECUM1H271JCN	C.CAPACITOR CH 50V 270P	1	
C3610		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3611		ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	
C3613		ECUM1H181JCN	C.CAPACITOR CH 50V 180P	1	
C3614		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C3901-05		ECEA1CKA100	E.CAPACITOR 16V 10U	5	
C3906		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3907		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C3908		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3909,10		ECA1AM471	E.CAPACITOR 10V 470U	2	
C3911		ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	
C3912		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C3913		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3914		ECEA1EK3R3	E.CAPACITOR 25V 3.3U	1	
C3915		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C3916		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3917		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C3918		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C3919		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3922		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3923		ECEA1CKA100	E.CAPACITOR 16V 10U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C3924		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3927		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C4001,02		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C4003,04		ECEA1CKA100	E.CAPACITOR 16V 10U	2	
C4005		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C4006		ECUM1C224ZFN	C.CAPACITOR CH 16V 0.22U	1	
C4007		ECEA1CPZ101	E.CAPACITOR 16V 100U	1	
C4008		ECUM1C224ZFN	C.CAPACITOR CH 16V 0.22U	1	
C4009		ECEA1CPZ101	E.CAPACITOR 16V 100U	1	
C4010		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C4011,12		ECUM1H122KBN	C.CAPACITOR CH 50V 1200P	2	
C4501		ECQB1H152JZ	F.CAPACITOR 50V 1500P	1	
C4502		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4503		ECUX1H152KBV	C.CAPACITOR CH 50V 1500P	1	
C4504,05		ECEA1CU470	E.CAPACITOR 16V 47U	2	
C4506		ECEA1CU100	E.CAPACITOR 16V 10U	1	
C4507		ECQB1H223JF	P.CAPACITOR 50V 0.022U	1	
C4508		ECEA1EBZ4R7	E.CAPACITOR 25V 4.7U	1	
C4509		ECEA1AU470	E.CAPACITOR 10V 47U	1	
C4510		ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C4511		ECQB1H332JF	P.CAPACITOR 50V 3300P	1	
C4512		ECUX1H561JV	C.CAPACITOR CH 50V 560P	1	
C4513		ECUX1H681JV	C.CAPACITOR CH 50V 680P	1	
C4514		ECUX1H561JV	C.CAPACITOR CH 50V 560P	1	
C4515		ECEA1EU4R7	E.CAPACITOR 25V 4.7U	1	
C4517		ECEA1AU101	E.CAPACITOR 10V 100U	1	
C4518		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4521		ECUM1E473KBN	C.CAPACITOR CH 25V 0.047U	1	
C4522		ECEA1HU3R3	E.CAPACITOR 50V 3.3U	1	
C4528		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4530		ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C4533		ECEA1CU330	E.CAPACITOR 16V 33U	1	
C4537		ECUX1H102JCV	C.CAPACITOR CH 50V 1000P	1	
C4538		ECEA1HUR47	E.CAPACITOR 50V 0.47U	1	
C4539		ECUX1C224ZFV	C.CAPACITOR CH 16V 0.22U	1	
C4541		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4545		ECUX1H102KBV	C.CAPACITOR CH 50V 1000P	1	
C4551		ECQB1H223JF	P.CAPACITOR 50V 0.022U	1	
C4552		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4556		ECEA1CU100	E.CAPACITOR 16V 10U	1	
C4558		ECEA1EB24R7	E.CAPACITOR 25V 4.7U	1	
C4559		ECEA1AU470	E.CAPACITOR 10V 47U	1	
C4560		ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C4561		ECQB1H332JF	P.CAPACITOR 50V 3300P	1	
C4562		ECUX1H561JV	C.CAPACITOR CH 50V 560P	1	
C4563		ECUX1H681JV	C.CAPACITOR CH 50V 680P	1	
C4564		ECUX1H561JV	C.CAPACITOR CH 50V 560P	1	
C4565		ECEA1EU4R7	E.CAPACITOR 25V 4.7U	1	
C4567		ECEA1AU101	E.CAPACITOR 10V 100U	1	
C4568		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4572		ECEA1HU3R3	E.CAPACITOR 50V 3.3U	1	
C4576		ECUM1E473KBN	C.CAPACITOR CH 25V 0.047U	1	
C4583		ECEA1CU330	E.CAPACITOR 16V 33U	1	
C4585,86		ECEA1AU101	E.CAPACITOR 10V 100U	2	
C4591		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4592		ECUX1H152KBV	C.CAPACITOR CH 50V 1500P	1	
C4593		ECUX1H102JCV	C.CAPACITOR CH 50V 1000P	1	
C4594,95		ECUX1H471JCV	C.CAPACITOR CH 50V 470P	2	
C4596		ECEA1CU100	E.CAPACITOR 16V 10U	1	
C4597		ECUX1H330JCV	C.CAPACITOR CH 50V 33P	1	
C4598		ECUX1H102JCV	C.CAPACITOR CH 50V 1000P	1	
C4604		ECUM1H182JN	C.CAPACITOR CH 50V 1800P	1	
C4606		ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C4611		ECQB1H182JZ	F.CAPACITOR 50V 1800P	1	
C4613		ECUX1H821JCV	C.CAPACITOR CH 50V 820P	1	
C4616		ECUX1H102ZFV	C.CAPACITOR CH 50V 1000P	1	
C4617		ECEA10M22	E.CAPACITOR 10V 22U	1	
C4618		ECQB1H822JZ	F.CAPACITOR 50V 8200P	1	
C4621		ECEA0JU101	E.CAPACITOR 6.3V 100U	1	
C4629		ECQB1H562JZ	P.CAPACITOR 50V 5600P	1	
C4636		ECUX1H471JV	C.CAPACITOR CH 50V 470P	1	
C4638		ECQB1H822JZ	F.CAPACITOR 50V 8200P	1	
C4652,53		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	2	
C4701		ECCD2H181J	C.CAPACITOR 500V 180P	1	
C4702		ECQP1222JZ	P.CAPACITOR 100V 2200P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C4703		ECQB1H102JF	P.CAPACITOR 50V 1000P	1	
C4704		ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C4705		ECEA16M33	E.CAPACITOR 16V 33U	1	
C4706		ECQV1H104JM	P.CAPACITOR 50V 0.1U	1	
C4707		ECQB1H223JF	P.CAPACITOR 50V 0.022U	1	
C4708		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C4709		ECQB1H472JF	P.CAPACITOR 50V 4700P	1	
C4710		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C4711,12		ECEA1AKA220	E.CAPACITOR 10V 22U	2	
C4713		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C4714		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C4901,02		ECQB1H103JZ	P.CAPACITOR 50V 0.01U	2	
C4903,04		ECQB1H332JZ	F.CAPACITOR 50V 3300P	2	
C4905,06		VCEA1CAD100	E.CAPACITOR 16V 10U	2	
C4907,08		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
C4909,10		ECQB1H103JZ	P.CAPACITOR 50V 0.01U	2	
C4911,12		ECQB1H332JZ	F.CAPACITOR 50V 3300P	2	
C4913,14		VCEA1CAD100	E.CAPACITOR 16V 10U	2	
C4915,16		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
C4917,18		ECQB1H103JZ	P.CAPACITOR 50V 0.01U	2	
C4919,20		ECQB1H332JZ	F.CAPACITOR 50V 3300P	2	
C4923,24		VCEA0JAC101	E.CAPASITOR 6.3V 100U	2	
C6001		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6002		ECEA0JKA330	E.CAPACITOR 6.3V 33U	1	
C6003		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6004		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C6005		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6006		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C6007,08		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	2	
C6010		ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	1	
C6011		ECUM1H472KBN	C.CAPACITOR CH 50V 4700P	1	
C6012		ECUM1H392KBN	C.CAPACITOR CH 50V 3900P	1	
C6013		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C6014		ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C6015		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C6016,17		ECEA1HKN3R3	E.CAPACITOR 50V 3.3U	2	
C6018		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C6019		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6020		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C6021		ECEA16M10	E.CAPACITOR 16V 1U	1	
C6022		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C6023		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C6024		ECEA1HKA4R7	E.CAPACITOR 50V 4.7U	1	
C6025		ECUM1H392KBN	C.CAPACITOR CH 50V 3900P	1	
C6026		ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	1	
C6027		ECUM1E104KBN	C.CAPACITOR CH 25V 0.1U	1	
C6028		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C6029		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C6030		EECS5R5T224N	E.CAPACITOR 5.5V 0.22U	1	
C6034		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6035		ECEA1CKA330	E.CAPACITOR 16V 33U	1	
C6036		ECEA0JKA330	E.CAPACITOR 6.3V 33U	1	
C6037		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6038		ECEA1AKA470	E.CAPACITOR 10V 47U	1	
C6040		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6041		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C6042		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6043		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C6045		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6046		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6049		ECUM1H271JCN	C.CAPACITOR CH 50V 270P	1	
C6050,51		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	2	
C6053-56		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	4	
C6062		ECUM1H271JCN	C.CAPACITOR CH 50V 270P	1	
C6063		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C7302		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C7303		ECQV1H393JZ	P.CAPACITOR 50V 0.039U	1	
C7304		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C7305		ECQV1H473JZ	P.CAPACITOR 50V 0.047U	1	
C7306		ECQB1H102KZ	P.CAPACITOR 50V 1000P	1	
C7307		ECQB1H822KZ	P.CAPACITOR 50V 8200P	1	
C7308		ECQB1H102KZ	P.CAPACITOR 50V 1000P	1	
C7309		ECQB1H152JH	P.CAPACITOR 50V 1500P	1	
C7310		ECEA16M10	E.CAPACITOR 16V 1U	1	
C7311		ECEA50MR47	E.CAPACITOR 50V 0.47U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C7312		ECQV1H224JM	P.CAPACITOR 50V 0.22U	1	
C7313		ECQV1H104JM	P.CAPACITOR 50V 0.1U	1	
C7314		ECQV1H224JM	P.CAPACITOR 50V 0.22U	1	
C7315		ECQV1H104JM	P.CAPACITOR 50V 0.1U	1	
C7316		ECQV1H224JM	P.CAPACITOR 50V 0.22U	1	
C7317		ECEA1CK101	E.CAPACITOR 16V 100U	1	
C7318		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7319		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C7320,21		ECEA1CK100	E.CAPACITOR 16V 10U	2	
C7323,24		ECQV1H393JZ	P.CAPACITOR 50V 0.039U	2	
C7331		ECQV1H474JM	P.CAPACITOR 50V 0.47U	1	
C7332,33		ECUM1H102ZFN	C.CAPACITOR CH 50V 1000P	2	
C7334		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7335		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C7336		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7337		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C7339		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7340		ECUM1H390JPN	C.CAPACITOR CH 50V 39P	1	
C7341		ECUM1H070DCN	C.CAPACITOR CH 50V 7P	1	
C7342		ECQV1H823JM	P.CAPACITOR 50V 0.082U	1	
C7343		ECEA1CK100	E.CAPACITOR 16V 10U	1	
C7345		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7346		ECUM1H390JPN	C.CAPACITOR CH 50V 39P	1	
C7347		ECUM1H070DCN	C.CAPACITOR CH 50V 7P	1	
C7348		ECQV1H393JZ	P.CAPACITOR 50V 0.039U	1	
C7349,50		ECUM1H221JCN	C.CAPACITOR CH 50V 220P	2	
C7351,52		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C7353		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C7408		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7409		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C7410		ECUM1H563ZFN	C.CAPACITOR CH 50V 0.056U	1	
C7411		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7412		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7413		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C7414		ECUM1H821JCN	C.CAPACITOR CH 50V 820P	1	
C7415		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7416		ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	
C7417		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7418		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C7419		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C7420		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7421		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C7422,23		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C7424		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C7425		ECEA1HKA100	E.CAPACITOR 50V 10U	1	
C7426		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C7427		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7428		ECEA1HKA2R2	E.CAPACITOR 50V 2.2U	1	
C7429		ECEA1CSN100	E.CAPACITOR 16V 10U	1	
C7901-03		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	3	
C7904		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C7905		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7906		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C7907		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7908		ECQV1H104JM	P.CAPACITOR 50V 0.1U	1	
C7909		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7910		ECEA1CK100	E.CAPACITOR 16V 10U	1	
C7911-13		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	3	
C7914		ECEA0JK470I	E.CAPACITOR 6.3V 47U	1	
C7915		ECUX1H100DCV	C.CAPACITOR CH 50V 10P	1	
C7916		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7917		ECEA0JK470I	E.CAPACITOR 6.3V 47U	1	
C7918		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7919		ECEA0JK470I	E.CAPACITOR 6.3V 47U	1	
C7920		ECEA1CK100	E.CAPACITOR 16V 10U	1	
C7921		ECQB1H102JH	P.CAPACITOR 50V 1000P	1	
C7922		ECQB1H272JH	P.CAPACITOR 50V 2700P	1	
C7923		ECUX1H151JCV	C.CAPACITOR CH 50V 150P	1	
C7924		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C7925		ECUX1H561JCV	C.CAPACITOR CH 50V 560P	1	
C7926		ECEA1CK100	E.CAPACITOR 16V 10U	1	
C7927		ECQB1H102JH	P.CAPACITOR 50V 1000P	1	
C7928		ECQB1H272JH	P.CAPACITOR 50V 2700P	1	
C7929		ECUX1H151JCV	C.CAPACITOR CH 50V 150P	1	
C7930		ECEA1CKN100	E.CAPACITOR 16V 10U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C7931		ECUX1H561JCV	C.CAPACITOR CH 50V 560P	1	
C7932,33		ECEA1CKN100	E.CAPACITOR 16V 10U	2	
C7934		ECUX1H220JCV	C.CAPACITOR CH 50V 22P	1	
C7935		ECUX1H470JCV	C.CAPACITOR CH 50V 47P	1	
C7937		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7938		ECEA1HKR47	E.CAPACITOR 50V 0.47U	1	
C7939,40		ECEA1HKN0R1	E.CAPACITOR 50V 0.1U	2	
C7941		ECEA1HKR47	E.CAPACITOR 50V 0.47U	1	
C7942		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7943		ECUX1H100DCV	C.CAPACITOR CH 50V 10P	1	
C7945		ECUX1H101JCV	C.CAPACITOR CH 50V 100P	1	
C7946		ECUX1H220JCV	C.CAPACITOR CH 50V 22P	1	
C7947		ECEA1HKR47	E.CAPACITOR 50V 0.47U	1	
C7948		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7949		ECEA0JK330	E.CAPACITOR 6.3V 33U	1	
C7950-53		ECEA1CKN100	E.CAPACITOR 16V 10U	4	
C7954		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C7955-60		ECEA1CK100	E.CAPACITOR 16V 10U	6	
C7961		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7963		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7964		ECEA1CK100	E.CAPACITOR 16V 10U	1	
C7965,66		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	2	
C7967		ECEA1CK100	E.CAPACITOR 16V 10U	1	
C71001		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
C71003		ECEA0JK101	E.CAPACITOR 6.3V 100U	1	
C71004		ECEA1HK010	E.CAPACITOR 50V 1U	1	
C71005		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
C71007		ECEA1AKN470	E.CAPACITOR 10V 47U	1	
C71008		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C71009,10		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C71011		ECEA1HKN010	E.CAPACITOR 50V 1U	1	
C71012		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C71014		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C71016,17		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C71019		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C71020		ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	
C71022		ECUM1H390JCN	C.CAPACITOR CH 50V 39P	1	
C71023		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C71024		ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
D301		1SS283	DIODE	1	
D303		MA151WK	DIODE	1	
D305		1SS254	DIODE	1	
D306		MA723VT	DIODE	1	
D307		1SS254	DIODE	1	
D308,09		MA151WK	DIODE	2	
D801-07		1SS254	DIODE	7	
D808		MA151WK	DIODE	1	
D1002		1SS254	DIODE	1	
D2001-05		1SS254	DIODE	5	
D2501-08		1SS254	DIODE	8	
D2510		1SS254	DIODE	1	
D3002		MA28W-A	DIODE	1	
D3003		1SS254	DIODE	1	
D3301		1SS254	DIODE	1	
D3302		MA151K	DIODE	1	
D3304		MA151K	DIODE	1	
D3403		MA723VT	DIODE	1	
D3408		1SS254	DIODE	1	
D3501		1SS254	DIODE	1	
D3502		MA153	DIODE	1	
D3504		MA151WK	DIODE	1	
D3901		1SS254	DIODE	1	
D3902		MA4130L	DIODE	1	
D3903		1SS254	DIODE	1	
D3904		MA151WK	DIODE	1	
D3906		MA151WA	DIODE	1	
D3908,09		1SS254	DIODE	2	
D4003		MA723VT	DIODE	1	
D4004		1SS254	DIODE	1	
D4501-04		MA141K	DIODE	4	
D4601,02		MA141K	DIODE	2	
D4701-03		1SS254	DIODE	3	
D6001		1SS254	DIODE	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
D6002		MA723VT	DIODE	1	
D6003		1SS254	DIODE	1	
D6005		MA151WK	DIODE	1	
D6006		MA151WA	DIODE	1	
D6007		MA151WK	DIODE	1	
D6008		MA151WA	DIODE	1	
D6009		11EQS04	DIODE	1	
D6011,12		11EQS04	DIODE	2	
D6013		MA723VT	DIODE	1	
D6014		1SS254	DIODE	1	
D6015		MA723VT	DIODE	1	
D7303		MA28WA	DIODE	1	
D7304		MA3100L	DIODE	1	
D7402		MA4300M	DIODE	1	
D7901-03		MA141WK	DIODE	3	
D7904		MA141K	DIODE	1	
D7905		MA141WA	DIODE	1	
D7906		MA141WK	DIODE	1	
D7907		MA141K	DIODE	1	
D71001,02		MA151K	DIODE	2	
DL801		EFDUN124A13N	DELAY	1	
DL802		EFDVR645A45A	DELAY LINE	1	
DL803		VLD0147	DELAY LINE	1	
FL301		ELB4M022	FILTER	1	
FL302		VLF0639	FILTER	1	
FL801		VLF1079	FILTER	1	
FL3001		ELB4H020	FILTER	1	
FL3601		ELB4R031	FILTER	1	
FL3901		VLF1120	FILTER	1	
FL3902		VLF0765	FILTER	1	
FL7901		VLF0703	FILTER	1	
FL7902		ELKAW103EB	FILTER	1	
FL7904-11		ELKAW103EB	FILTER	8	
FL7912-15		ELKAW101GB	FILTER	4	
FL7916		VLF0633	FILTER	1	
FL7918		ELKAW103EB	FILTER	1	
IC301		VEFH20B	HIC	1	
IC302		MN3859S	IC	1	
IC303		AN1358S	IC	1	
IC0701		LA7576	IC	1	
IC801		VCR0383	IC	1	
IC802		M52352FP	IC	1	
IC2001		AN3727S	IC	1	
IC2002		UPD4053BG	IC	1	
IC2501		BA6219B	IC	1	
IC2502		LM358PS	IC	1	
IC2503		XRA6439S	IC	1	
IC2504		LM358PS	IC	1	
IC2505		LM393P	IC	1	
IC3001		AN3581S	IC	1	
IC3002		M52055FP	IC	1	
IC3301		M52083FP	IC	1	
IC3401		NJM2233BMA	IC	1	
IC3403		MN155202VZAM	IC	1	
IC3404		MN1280S	IC	1	
IC3405		UPD4066BG	IC	1	
IC3501		LC74760	IC	1	
IC3502		M52055FP	IC	1	
IC3503		NJM2246DA	IC	1	
IC3504		NJM2233BMA	IC	1	
IC3601		AN6308S	IC	1	
IC3901		M52475AP	IC	1	
IC3902		AN3916	IC	1	
IC3904		AN1393S	IC	1	
IC4001		NJM4565DD	IC	1	
IC4501		XLH7773AKS	IC	1	
IC4601		BA7755AF	IC	1	
IC4701		AN1358S	IC	1	
IC4702		MN4066BS	IC	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
IC4901		LA7155M	IC	1	
IC4902		MN4066BS	IC	1	
IC6001		MN6755320H3W	IC	1	
IC6002		M38024V1BN	IC	1	
IC6003		MN1280S	IC	1	
IC6005		UPD4052BG	IC	1	
IC6007		M6M80041P	IC	1	
IC6008		TL431CLP	IC	1	
IC7301		TDA3803A	IC	1	
IC7302		TA8721SN	IC	1	
IC7401		M66006FP	IC	1	
IC7402		LA7217M	IC	1	
IC7901		TB1204F	IC	1	
IC7902		TA2009F	IC	1	
IC7903		M5238FP	IC	1	
IC71001		MN170801VZAZ	IC	1	
IC71003		MV1820FCGDP	IC	1	
IC71004		MN1280S	IC	1	
J3901,02		VJS1470	21PIN SKIRT JACK	2	
K2		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
K4		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
K6		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
K0702		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
K0704,05		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
K3010-12		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	3	
K3908		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K6003-05		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	3	
K7404		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K7409,10		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	2	
K7417		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
L302		VLQ0188J180	COIL 18UH	1	
L304		VLQ0188J270	COIL 27UH	1	
L305		VLQ0188J101	COIL 100UH	1	
L306		VLQ0188J390	COIL 39UH	1	
L309-11		VLQ0188J330	COIL 33UH	3	
L312		ELESN121JA	COIL 120UH	1	
L0701,02		ELJNAR10MF	COIL	2	
L0705		VLQ0163J5R6	COIL 5.6UH	1	
L0706		VLQEL05T120	COIL 12UH	1	
L801,02		ELESE681KA	COIL 680UH	2	
L803		ELESN331KA	COIL 330UH	1	
L804		VLQ0407101K	COIL 100UH	1	
L806		VLQ0407101K	COIL 100UH	1	
L807,08		VLQ0188J150	COIL 15UH	2	
L809		VLQ0188J330	COIL 33UH	1	
L810		VLQ0188J150	COIL 15UH	1	
L811		VLQ0188J151	COIL 150UH	1	
L812		VLQ0188J270	COIL 27UH	1	
L813,14		VLQ0188J150	COIL 15UH	2	
L2001		VLQ0569	COIL	1	
L2002		VLQ0556	COIL	1	
L2501		VLP0074	COIL	1	
L2502		ELESE330KA	COIL 33UH	1	
L2503		ELESE102KA	COIL 1000UH	1	
L3001-03		VLQ0188J330	COIL 33UH	3	
L3004		VLQ0398	COIL	1	
L3005-08		VLQ0556	COIL	4	
L3301		VLQ0188J150	COIL 15UH	1	
L3304		VLQ0188J330	COIL 33UH	1	
L3306		VLQ0188J390	COIL 39UH	1	
L3307		VLQ0188J120	COIL 12UH	1	
L3308		VLQ0188J330	COIL 33UH	1	
L3309		VLQ0188J181	COIL 180UH	1	
L3310		VLQ0188J270	COIL 27UH	1	
L3313		ELESE681KA	COIL 680UH	1	
L3315,16		VLQ0188J5R6	COIL 5.6UH	2	
L3318		VLQ0188J330	COIL 33UH	1	
L3323		VLQ0188J330	COIL 33UH	1	
L3401		VLQ0188J150	COIL 15UH	1	
L3404		VLQ0188J220	COIL 22UH	1	
L3405		VLQ0188J330	COIL 33UH	1	
L3412		VLQ0188J330	COIL 33UH	1	
L3415		VLQ0188J120	COIL 12UH	1	
L3501		VLQ0188J330	COIL 33UH	1	
L3502		VLQ0188J5R6	COIL 5.6UH	1	
L3503		VLQ0188J100	COIL 10UH	1	
L3504		VLQ0188J390	COIL 39UH	1	
L3505		VLQ0188J820	COIL 82UH	1	
L3508		VLQ0188J330	COIL 33UH	1	
L3601		VLQEL05T120	COIL 12UH	1	
L3602,03		VLQEL05S101K	COIL 100UH	2	
L3604		VLQEL05S151J	COIL 150UH	1	
L3605		VLQEL05S820K	COIL 82UH	1	
L3901-04		ELESE101KA	COIL 100UH	4	
L3906		VLQ0188J1R0	COIL 1UH	1	
L4001,02		ELESE101KA	COIL 100UH	2	
L4501,02		ELESE101KA	COIL 100UH	2	
L4601		VLQEL07F153	COIL	1	
L4701		ELESE471KA	COIL	1	
L4702		ELESE101KA	COIL 100UH	1	
L4901,02		ELESE102KA	COIL 1000UH	2	
L4903,04		ELESE101KA	COIL 100UH	2	
L4905,06		ELESE102KA	COIL 1000UH	2	
L4907,08		ELESE101KA	COIL 100UH	2	
L4909,10		ELESE102KA	COIL 1000UH	2	
L6001		VLP0083	COIL	1	
L6002		ELESE101KA	COIL 100UH	1	
L6003		VLP0083	COIL	1	
L6007,08		VLP0083	COIL	2	
L6009		ELESE101KA	COIL 100UH	1	
L7301		ELESQ102KA	COIL 1000UH	1	
L7407		VLQ0599J1R0	COIL 1UH	1	
L7408-12		VLQ0599J680	COIL 68UH	5	
L7901,02		VLP0083	COIL	2	
L71001,02		VLQ0188J101	COIL 100UH	2	
L71003-12		VLQ0584	COIL	10	
L71013		VLQ0188J3R3	COIL 3.3UH	1	
P1001		VJP2593	CONNECTOR (MALE)	1	
P1002		VJP1142	CONNECTOR (MALE)	1	
P2001		VJP1232T	CONNECTOR (MALE) 5P	1	
P2003		VJP3502	CONNECTOR (MALE)	1	
P2004		VJS3537A015G	CONNECTOR (FEMALE) 15P	1	
P3001		VJS3537A020G	CONNECTOR (FEMALE) 20P	1	
P3002		VJP3233A010	CONNECTOR (MALE) 10P	1	
P3003		VJP1393T	CONNECTOR (MALE) 13P	1	
P4001		VJS2331	CONNECTOR (FEMALE)	1	
P4002		VJP1238T	CONNECTOR (MALE) 11P	1	
P4003		VJP1230T	CONNECTOR (MALE) 3P	1	
P6001		VJS3537A014G	CONNECTOR (FEMALE) 14P	1	
P6003		VJP1233T	CONNECTOR (MALE) 6P	1	
P6004		VJP1235T	CONNECTOR (MALE) 8P	1	
P7401,02		VJS3537A020G	CONNECTOR (FEMALE) 20P	2	
PK0701		VJR0816A010W	CONNECTOR (MALE) 10P	1	
PK4001-03		VJR0757B018T	CONNECTOR (MALE) 18P	3	
PK7901,02		VJR0477	PACK PIN	2	
PP0701		VJP3589A004B	CONNECTOR (MALE) 4P	1	
PP2001		VJP3042A012W	CONNECTOR (MALE) 12P	1	
PP2002		VJP3042A010W	CONNECTOR (MALE) 10P	1	
PP3001		VJP3042A009W	CONNECTOR (MALE) 9P	1	
PP3002		VJP3042A012W	CONNECTOR (MALE) 12P	1	
PP3003		VJP3042A013W	CONNECTOR (MALE) 13P	1	
PP3011,12		VJP3042A018W	CONNECTOR (MALE) 18P	2	
PP3013		VJP3042A014W	CONNECTOR (MALE) 14P	1	
PP3021-24		VJP3043A012W	CONNECTOR (MALE) 12P	4	
PP3301		VJP3042A011W	CONNECTOR (MALE) 11P	1	
PP4501		VJP3042A017W	CONNECTOR (MALE) 17P	1	
PP7406		VJP3043A010W	CONNECTOR (MALE) 10P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
PS301		VJS3042B009W	CONNECTOR (FEMALE) 9P	1	
PS302		VJS3042B012W	CONNECTOR (FEMALE) 12P	1	
PS303		VJS3042B013W	CONNECTOR (FEMALE) 13P	1	
PS2001		VJS3042B012W	CONNECTOR (FEMALE) 12P	1	
PS2002		VJS3042B010W	CONNECTOR (FEMALE) 10P	1	
PS3021-24		VJS3043B012W	CONNECTOR (FEMALE) 12P	4	
PS3302,03		VJS3042B018W	CONNECTOR (FEMALE) 18P	2	
PS3501		VJS3042F014W	CONNECTOR (FEMALE) 14P	1	
PS3601		VJS3042B011W	CONNECTOR (FEMALE) 11P	1	
PS4701		VJS3042B017W	CONNECTOR (FEMALE) 17P	1	
PS7301,02		VJR0477	PACK PIN	2	
PS71001		VJS3043B010W	CONNECTOR (FEMALE) 10P	1	
Q301		MSC2295	TRANSISTOR	1	
Q302		MSB709	TRANSISTOR	1	
Q303,04		MSC2295	TRANSISTOR	2	
Q305		MSD601	TRANSISTOR	1	
Q306		MSC2295	TRANSISTOR	1	
Q307,08		MSB709	TRANSISTOR	2	
Q0701		MSD601-S	TRANSISTOR	1	
Q0702		MSB709	TRANSISTOR	1	
Q801		2SA1022	TRANSISTOR	1	
Q802		MSC2295	TRANSISTOR	1	
Q803		MSB709	TRANSISTOR	1	
Q1001		2SD1996	TRANSISTOR	1	
Q2001,02		MSB709	TRANSISTOR	2	
Q3001		MSD602	TRANSISTOR	1	
Q3002		2SB1322	TRANSISTOR	1	
Q3003		MSD601	TRANSISTOR	1	
Q3004		MSC2295	TRANSISTOR	1	
Q3005,06		MSD601	TRANSISTOR	2	
Q3301,02		MSC2295	TRANSISTOR	2	
Q3304,05		MSD601	TRANSISTOR	2	
Q3401,02		MSC2295	TRANSISTOR	2	
Q3403		MSD601	TRANSISTOR	1	
Q3404		MSC2295	TRANSISTOR	1	
Q3405-07		MSD601	TRANSISTOR	3	
Q3408		MSD602	TRANSISTOR	1	
Q3409		MSB710	TRANSISTOR	1	
Q3410-12		MSD601	TRANSISTOR	3	
Q3422		MSD1328	TRANSISTOR	1	
Q3423		MSD601	TRANSISTOR	1	
Q3424		MSB710	TRANSISTOR	1	
Q3425		MSC2295	TRANSISTOR	1	
Q3426,27		MSD601	TRANSISTOR	2	
Q3501		MSD601	TRANSISTOR	1	
Q3502		MSB709	TRANSISTOR	1	
Q3601		MSD601	TRANSISTOR	1	
Q3602,03		MSC2295	TRANSISTOR	2	
Q3604		MSB709	TRANSISTOR	1	
Q3901,02		2SD1991A	TRANSISTOR	2	
Q3903		MSD1328	TRANSISTOR	1	
Q3904		MSD601	TRANSISTOR	1	
Q3905		MSC2295	TRANSISTOR	1	
Q3906		MSB709	TRANSISTOR	1	
Q3907		MSD601	TRANSISTOR	1	
Q3912		2SD1996	TRANSISTOR	1	
Q3913-15		MSD601	TRANSISTOR	3	
Q3916		MSB710	TRANSISTOR	1	
Q3917		MSD602	TRANSISTOR	1	
Q3918		MSB710	TRANSISTOR	1	
Q4501		2SD655TZ	TRANSISTOR	1	
Q4551		2SB561	TRANSISTOR	1	
Q4552		2SD1819A	TRANSISTOR	1	
Q4601,02		2SD1819A	TRANSISTOR	2	
Q4701		2SD602A-R	TRANSISTOR	1	
Q4702,03		MSD601	TRANSISTOR	2	
Q4704,05		MSB710	TRANSISTOR	2	
Q4706		2SB1378	TRANSISTOR	1	
Q4707		2SD601A	TRANSISTOR	1	
Q4708		2SB1378	TRANSISTOR	1	
Q6001		2SD1991A	TRANSISTOR	1	
Q6002		MSB709	TRANSISTOR	1	
Q6003		2SD1915F	TRANSISTOR	1	
Q6004-06		MSD601	TRANSISTOR	3	
Q6008		2SD1991	TRANSISTOR	1	
Q7301		MSD601-S	TRANSISTOR	1	
Q7304,05		MSD601	TRANSISTOR	2	
Q7306		2SC2404-C	TRANSISTOR	1	
Q7307		2SD1328-S	TRANSISTOR	1	
Q7901,02		MSD601	TRANSISTOR	2	
Q7903		2SC3931CD	TRANSISTOR	1	
Q7904-07		2SB1219	TRANSISTOR	4	
Q7908,09		2SC3929	TRANSISTOR	2	
Q7910,11		2SD1820	TRANSISTOR	2	
Q7912		2SB1219	TRANSISTOR	1	
Q7913		2SB1218-Q	TRANSISTOR	1	
Q7914,15		2SD1979-S	TRANSISTOR	2	
Q7916,17		2SB1219	TRANSISTOR	2	
Q71001		2SC2295	TRANSISTOR	1	
Q71002		2SA1022	TRANSISTOR	1	
Q71003		2SC2295	TRANSISTOR	1	
QR301		MRN1402	TRANSISTOR-RESISTOR	1	
QR302		MRN1403	TRANSISTOR-RESISTOR	1	
QR303		MRN1404	TRANSISTOR-RESISTOR	1	
QR304		MRN1402	TRANSISTOR-RESISTOR	1	
QR305		MRN2404	TRANSISTOR-RESISTOR	1	
QR306		XN6213	TRANSISTOR-RESISTOR	1	
QR307		MRN1404	TRANSISTOR-RESISTOR	1	
QR308		MRN1407	TRANSISTOR-RESISTOR	1	
QR309		MRN1402	TRANSISTOR-RESISTOR	1	
QR310		MRN1404	TRANSISTOR-RESISTOR	1	
QR311		MRN2404	TRANSISTOR-RESISTOR	1	
QR312		MRN2402	TRANSISTOR-RESISTOR	1	
QR313,14		MRN1404	TRANSISTOR-RESISTOR	2	
QR315		MRN2404	TRANSISTOR-RESISTOR	1	
QR316,17		XN6213	TRANSISTOR-RESISTOR	2	
QR318		MRN1402	TRANSISTOR-RESISTOR	1	
QR319,20		MRN1404	TRANSISTOR-RESISTOR	2	
QR802		MRN1404	TRANSISTOR-RESISTOR	1	
QR803		MRN1403	TRANSISTOR-RESISTOR	1	
QR805		MRN1404	TRANSISTOR-RESISTOR	1	
QR806		XN6213	TRANSISTOR-RESISTOR	1	
QR1001,02		MUN2211	TRANSISTOR-RESISTOR	2	
QR2001		XN1213	TRANSISTOR-TRANSISTOR	1	
QR2002		MUN2113	TRANSISTOR-RESISTOR	1	
QR2501		XN1211	TRANSISTOR-RESISTOR	1	
QR3001,02		MUN2212	TRANSISTOR-RESISTOR	2	
QR3003		MUN2111	TRANSISTOR-RESISTOR	1	
QR3301-04		DTC363EK	TRANSISTOR-RESISTOR	4	
QR3305		UN211D	TRANSISTOR-RESISTOR	1	
QR3306		DTC363EK	TRANSISTOR-RESISTOR	1	
QR3307		MRN1404	TRANSISTOR-RESISTOR	1	
QR3402		MRN2402	TRANSISTOR-RESISTOR	1	
QR3403		MRN1403	TRANSISTOR-RESISTOR	1	
QR3404		XN4212	TRANSISTOR-TRANSISTOR	1	
QR3405		MRN1403	TRANSISTOR-RESISTOR	1	
QR3406-08		XN1212	TRANSISTOR-RESISTOR	3	
QR3409,10		MRN1403	TRANSISTOR-RESISTOR	2	
QR3411		MRN1402	TRANSISTOR-RESISTOR	1	
QR3412		MRN1404	TRANSISTOR-RESISTOR	1	
QR3415		XN4212	TRANSISTOR-TRANSISTOR	1	
QR3416		XN1212	TRANSISTOR-RESISTOR	1	
QR3417		XN4212	TRANSISTOR-TRANSISTOR	1	
QR3418		MRN1402TE85L	TRANSISTOR-RESISTOR	1	
QR3901-03		MRN1404	TRANSISTOR-RESISTOR	3	
QR3904,05		MRN1402TE85L	TRANSISTOR-RESISTOR	2	
QR3906		MRN1404	TRANSISTOR-RESISTOR	1	
QR4001		MUN2212	TRANSISTOR-RESISTOR	1	
QR4002,03		DTC363EK	TRANSISTOR-RESISTOR	2	
QR4004,05		MUN2213	TRANSISTOR-RESISTOR	2	
QR4508,09		UN5113	TRANSISTOR-RESISTOR	2	
QR4510		UN5212	TRANSISTOR-RESISTOR	1	
QR4602		UN5111	TRANSISTOR-RESISTOR	1	
QR4603		UN5213	TRANSISTOR-RESISTOR	1	
QR4701-03		MRN1403	TRANSISTOR-RESISTOR	3	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
QR4704		MRN1404	TRANSISTOR-RESISTOR	1	
QR4901		MRN1404	TRANSISTOR-RESISTOR	1	
QR4902		UN211D	TRANSISTOR-RESISTOR	1	
QR6001		MUN2211	TRANSISTOR-RESISTOR	1	
QR6002,03		MUN2111	TRANSISTOR-RESISTOR	2	
QR6004		MUN2211	TRANSISTOR-RESISTOR	1	
QR6009		XN1213	TRANSISTOR-TRANSISTOR	1	
QR6012		MUN2213	TRANSISTOR-RESISTOR	1	
QR6013		MUN2212	TRANSISTOR-RESISTOR	1	
QR6014		MUN2213	TRANSISTOR-RESISTOR	1	
QR6015		MUN2111	TRANSISTOR-RESISTOR	1	
QR7301,02		MRN1404	TRANSISTOR-RESISTOR	2	
QR7312-14		MRN1402	TRANSISTOR-RESISTOR	3	
QR7315,16		MRN1404	TRANSISTOR-RESISTOR	2	
QR7403		MUN2214	TRANSISTOR-RESISTOR	1	
QR7405		MUN2213	TRANSISTOR-RESISTOR	1	
QR7901,02		UN5213	TRANSISTOR-RESISTOR	2	
QR7903		UN5112	TRANSISTOR-RESISTOR	1	
QR7904		UN5214	TRANSISTOR-RESISTOR	1	
QR7905,06		UN5213	TRANSISTOR-RESISTOR	2	
QR71001		MRN1404	TRANSISTOR-RESISTOR	1	
R301		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R303		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R304		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R305		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R306		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R307		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R308		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R309		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R310		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R311		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R312		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R313		ERJ6GMYJ361	M.RESISTOR CH 1/10W 360	1	
R314		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R315		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R316		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R317		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R318		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	1	
R319		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R320		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R321		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R322		ERJ6GMYG123	M.RESISTOR CH 1/10W 12K	1	
R323		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R324		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R325		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R326		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R327		ERJ6GMYG432	M.RESISTOR CH 1/10W 4.3K	1	
R328		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R329		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R330		ERJ6GMYG432	M.RESISTOR CH 1/10W 4.3K	1	
R331		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R332		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R333		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R334		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R335		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R336		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R337		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R338,39		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R340		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R341		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R342		ERJ6GMYJ181	M.RESISTOR CH 1/10W 180	1	
R343		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R344		ERJ6GMYJ911	M.RESISTOR CH 1/10W 910	1	
R345		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R346		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R347		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R348		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R349		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R350		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R351		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R352		ERJ6GMYG183	M.RESISTOR CH 1/10W 18K	1	
R353		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R354		ERJ6GMYG753	M.RESISTOR CH 1/10W 75K	1	
R355		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R356		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R357		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R358		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R359		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R360,61		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R0702		ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	1	
R0704		ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
R0705		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R0706,07		ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	2	
R0708		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R0709		ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
R0710		ERJ6GEYJ154	M.RESISTOR CH 1/10W 150K	1	
R0713		ERJ3GEYJ331	M.RESISTOR CH 1/16W 330	1	
R0714		ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1	
R0715		ERJ3GEYJ183	M.RESISTOR CH 1/16W 18K	1	
R0716		VRE0040E151	M.RESISTOR CH 1/10W 150	1	
R0717		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R0718		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R0719		ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R0720		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R0722		ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
R0728		ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R0729		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R0732		ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R0783		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	1	
R802		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R803		ERJ6GMYJ242	M.RESISTOR CH 1/10W 2.4K	1	
R804,05		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R809		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R810,11		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R814		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R815		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R816		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R817		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R818		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R820		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R821,22		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R824		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R825		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R826		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	1	
R827		ERJ6GMYJ154	M.RESISTOR CH 1/10W 150K	1	
R828		ERJ6GMYJ204	M.RESISTOR CH 1/10W 200K	1	
R829		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R830		ERJ6GMYJ154	M.RESISTOR CH 1/10W 150K	1	
R831		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	1	
R832		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R833		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R834		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R835,36		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	2	
R837		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R838,39		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	2	
R840		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R841		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R842,43		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	2	
R844		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R845		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R846		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R847		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R848		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R849		ERJ6GMYK395	M.RESISTOR CH 1/10W 3.9M	1	
R850		ERJ6GMYJ302	M.RESISTOR CH 1/10W 3K	1	
R851,52		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R853		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R1001		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R1002		ERDS1TJ822	C.RESISTOR 1/2W 8.2K	1	
R2004		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R2005		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R2011		ERJ6GMYG222	M.RESISTOR CH 1/10W 2.2K	1	
R2012		ERJ6GMYG392	M.RESISTOR CH 1/10W 3.9K	1	
R2013,14		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	2	
R2015		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R2016		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R2018		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R2019		ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R2501		ERX1SJ1R8	M.RESISTOR 1W 1.8	1	
R2502		ERJ6GMYG112	M.REISITOR CH 1/10W 1.1K	1	
R2503		ERJ6GMYG102	M.RESISTOR CH 1/10W 1K	1	
R2504		ERJ6GMYG332	M.RESISTOR CH 1/10W 3.3K	1	
R2505		VRE0034E103	M.RESISTOR CH 1/10W 10K	1	
R2506		ERJ6GMYJ564	M.RESISTOR CH 1/10W 560K	1	
R2507		VRE0034E103	M.RESISTOR CH 1/10W 10K	1	
R2508		VRE0034E512	M.RESISTOR CH 1/10W 5.1K	1	
R2509		VRE0034E472	M.RESISTOR CH 1/10W 4.7K	1	
R2510		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R2511		ERJ6GMYJ684	M.RESISTOR CH 1/10W 680K	1	
R2513		ERJ6GMYG133	M.RESISTOR CH 1/10W 13K	1	
R2514		ERJ6GMYG821	M.RESISTOR CH 1/10W 820	1	
R2515		ERG12SJ561	M.RESISTOR 1/2W 560	1	
R2516		ERJ6GMYG473	M.RESISTOR CH 1/10W 47K	1	
R2517		ERX12SJR47	M.RESISTOR 1/2W 0.47	1	
R2518		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R2519		ERJ6GMYG432	M.RESISTOR CH 1/10W 4.3K	1	
R2520		ERJ6GMYG103	M.RESISTOR CH 1/10W 10K	1	
R2521-23		ERDS2TJ560	C.RESISTOR 1/4W 56	3	
R2524		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R2525		EROS2CKG6800	M.RESISTOR 1/4W 680	1	
R2526		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R2527		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R2528		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R2529		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R2530		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R2531,32		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	2	
R2533		ERJ6GMYJ393	M.RESISTOR CH 1/10W 39K	1	
R2534		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R2535		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R2536		ERJ6GMYJ824	M.RESISTOR CH 1/10W 820K	1	
R2537		ERJ6GMYJ393	M.RESISTOR CH 1/10W 39K	1	
R2538		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R2539		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	1	
R2540		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R2541		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R3001,02		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	2	
R3003		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R3004		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	1	
R3005		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3006,07		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R3008		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3009		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3010		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3011		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3012		ERJ6GMYG911	M.RESISTOR CH 1/10W 910	1	
R3013		ERJ6GMYG102	M.RESISTOR CH 1/10W 1K	1	
R3014		ERJ6GMYG471	M.RESISTOR CH 1/10W 470	1	
R3015		ERJ6GMYG102	M.RESISTOR CH 1/10W 1K	1	
R3016		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3017		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3018		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R3019		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R3021		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3022		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R3023		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R3024		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	1	
R3025		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R3026,27		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R3301		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3302		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R3303		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3304		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R3305		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3306		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R3307		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3308		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3310		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3322		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R3323		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R3324		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3325,26		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R3327		ERJ6GMYJ821	M.RESISTOR CH 1/10W 820	1	
R3328		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R3333		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3334		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R3335		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3336,37		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	2	
R3338		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3339		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3340		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3341		ERJ6GMYJ563	M.RESISTOR CH 1/10W 56K	1	
R3342		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R3345-47		ERJ6GMYJ821	M.RESISTOR CH 1/10W 820	3	
R3352		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3353		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R3401		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3402		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R3403		ERJ6GMYG361	M.RESISTOR CH 1/10W 360	1	
R3404		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3405		ERJ6GMYG123	M.RESISTOR CH 1/10W 12K	1	
R3406		ERJ6GMYG512	M.RESISTOR CH 1/10W 5.1K	1	
R3407		ERJ6GMYG272	M.RESISTOR CH 1/10W 2.7K	1	
R3408		ERJ6GMYG302	M.RESISTOR CH 1/10W 3K	1	
R3409		ERJ6GMYG821	M.RESISTOR CH 1/10W 820	1	
R3410		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3411-13		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	3	
R3415		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3417		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3422		ERJ6GMYG333	M.RESISTOR CH 1/10W 33K	1	
R3423		ERJ6GMYG683	M.RESISTOR CH 1/10W 68K	1	
R3424		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3425		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R3426		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R3427		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3428		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R3429		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3430		ERJ6GMYJ823	M.RESISTOR CH 1/10W 82K	1	
R3431		ERJ6GMYG821	M.RESISTOR CH 1/10W 820	1	
R3433		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3434		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3435		ERJ6GMYG302	M.RESISTOR CH 1/10W 3K	1	
R3436		ERJ6GMYG272	M.RESISTOR CH 1/10W 2.7K	1	
R3437		ERJ6GMYG512	M.RESISTOR CH 1/10W 5.1K	1	
R3438		ERJ6GMYG123	M.RESISTOR CH 1/10W 12K	1	
R3441		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R3442		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3443		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R3444,45		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	2	
R3446,47		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R3463		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3464		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3465		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R3466		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3467		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R3468,69		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	2	
R3470		ERJ6GMYG123	M.RESISTOR CH 1/10W 12K	1	
R3471		ERJ6GMYG512	M.RESISTOR CH 1/10W 5.1K	1	
R3472		ERJ6GMYG272	M.RESISTOR CH 1/10W 2.7K	1	
R3473		ERJ6GMYG302	M.RESISTOR CH 1/10W 3K	1	
R3474		ERJ6GMYG821	M.RESISTOR CH 1/10W 820	1	
R3475		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3476		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3477,78		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R3479		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3501		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3502		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R3503		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3504,05		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R3506		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R3507		ERJ6GMYG103	M.RESISTOR CH 1/10W 10K	1	
R3508		ERJ6GMYG332	M.RESISTOR CH 1/10W 3.3K	1	
R3509-11		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	3	
R3513,14		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	2	
R3515		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3516		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3517		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3518		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3519		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R3520		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3521		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R3522		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3523		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R3524		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3525		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R3526		ERJ6GMYJ470	M.RESISTOR CH 1/10W 47	1	
R3601		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3602		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3603		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3604		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3605		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R3606		ERJ6GMYJ821	M.RESISTOR CH 1/10W 820	1	
R3607-12		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	6	
R3613		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R3614		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3616		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3901-05		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	5	
R3906		ERDS1TJ750	C.RESISTOR 1/2W 75	1	
R3908,09		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	2	
R3910,11		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	2	
R3913		ERJ6GMZOROO	M.RESISTOR CH 1/10W 0	1	
R3914		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	1	
R3915		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R3916,17		ERDS2TJ181	C.RESISTOR 1/4W 180	2	
R3926		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3927,28		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R3929		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3930		ERJ6GMYJ112	M.RESISTOR CH 1/10W 1.1K	1	
R3931		ERJ6GMYJ123	M.RESISTOR CH 1/10W 12K	1	
R3932		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R3933		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R3934		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R3935		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3936		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R3938		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3945		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R3946		ERJ6GMZOROO	M.RESISTOR CH 1/10W 0	1	
R3950,51		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	2	
R3953		ERDS2TJ562	C.RESISTOR 1/4W 5.6K	1	
R3954		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R3955		ERJ6GMYJ123	M.RESISTOR CH 1/10W 12K	1	
R3956		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R3957-60		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	4	
R3961		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	1	
R3962		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3963		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3964		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R3965		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3966		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3967		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3968		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4001,02		ERDS2TJ680	C.RESISTOR 1/4W 68	2	
R4003-08		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	6	
R4009		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R4010		ERJ6GMYG433	M.RESISTOR CH 1/10W 43K	1	
R4011		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R4012		ERJ6GMYJ242	M.RESISTOR CH 1/10W 2.4K	1	
R4013		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R4014		ERJ6GMYG100	M.RESISTOR CH 1/10W 10	1	
R4015		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R4020		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R4021		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R4022		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R4028		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R4029,30		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R4033		ERJ6GMZOROO	M.RESISTOR CH 1/10W 0	1	
R4034		ERJ6GMYG393	M.RESISTOR CH 1/10W 39K	1	
R4035		ERJ6GMZOROO	M.RESISTOR CH 1/10W 0	1	
R4036		ERJ6GMYG393	M.RESISTOR CH 1/10W 39K	1	
R4501,02		ERJ3GEYOROO	M.RESISTOR CH 1/16W 0	2	
R4503		ERJ3GEYG223	M.RESISTOR CH 1/16W 22K	1	
R4504,05		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	2	
R4506,07		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	2	
R4508		ERJ3GEYG224	M.RESISTOR CH 1/16W 220K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R4509		ERJ3GEYJ622	M.RESISTOR CH 1/16W 6.2K	1	
R4511		ERJ3GEYG273	M.RESISTOR CH 1/16W 27K	1	
R4512		VRE0071E163	M.RESISTOR CH 1/10W 16K	1	
R4513		ERJ3GEYG103	M.RESISTOR CH 1/16W 10K	1	
R4514,15		ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	2	
R4518,19		ERJ3GEYOROO	M.RESISTOR CH 1/16W 0	2	
R4522		ERJ3GEYJ225	M.RESISTOR CH 1/16W 2.2M	1	
R4527		VRE0071E333	M.RESISTOR 33K	1	
R4528		VRE0071E153	M.RESISTOR 15K	1	
R4529		ERJ3GEYG562	M.RESISTOR CH 1/16W 5.6K	1	
R4530		ERJ3GEYJ334	M.RESISTOR CH 1/16W 330K	1	
R4534		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R4535		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R4539		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R4541		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R4542		ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
R4543		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R4551,52		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	2	
R4553,54		ERJ3GEYJ273	M.RESISTOR CH 1/16W 27K	2	
R4558		ERJ3GEYG224	M.RESISTOR CH 1/16W 220K	1	
R4561		ERJ3GEYG273	M.RESISTOR CH 1/16W 27K	1	
R4562		VRE0034E10C	M.RESISTOR CH 1/10W	1	
R4563		ERJ3GEYG272	M.RESISTOR CH 1/16W 2.7K	1	
R4568,69		ERJ3GEYJ273	M.RESISTOR CH 1/16W 27K	2	
R4573		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R4577		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R4578		VRE0071E473	M.RESISTOR CH 1/10W 47K	1	
R4581		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R4583		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R4584		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R4585		ERJ3GEYOROO	M.RESISTOR CH 1/16W 0	1	
R4586		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R4587,88		ERJ3GEYJ273	M.RESISTOR CH 1/16W 27K	2	
R4591		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R4592		ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1	
R4593		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R4594		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R4596		ERJ3GEYG103	M.RESISTOR CH 1/16W 10K	1	
R4597		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R4598,99		ERJ3GEYG223	M.RESISTOR CH 1/16W 22K	2	
R4603		ERJ3GEYG183	M.RESISTOR CH 1/16W 18K	1	
R4606		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R4610		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R4611		ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
R4612		ERJ3GEYJ331	M.RESISTOR CH 1/16W 330	1	
R4613		ERJ3GEYJ394	M.RESISTOR CH 1/16W 390K	1	
R4615		ERJ3GEYJ133	M.RESISTOR CH 1/16W 13K	1	
R4616		ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
R4638		ERJ3GEYOROO	M.RESISTOR CH 1/16W 0	1	
R4649		ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1	
R4651		ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
R4652		ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
R4653		ERJ3GEYJ221	M.RESISTOR CH 1/16W 220	1	
R4654		ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
R4655		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R4656		ERJ3GEYG243	M.RESISTOR CH 1/16W 24K	1	
R4657		ERJ3GEYJ392	M.RESISTOR CH 1/16W 3.9K	1	
R4666		ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R4671		ERJ3GEYG103	M.RESISTOR CH 1/16W 10K	1	
R4701		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	1	
R4702		ERJ6GMYJ821	M.RESISTOR CH 1/10W 820	1	
R4703		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R4704,05		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	2	
R4706		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R4707		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R4708		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4709		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R4710		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4711		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R4712		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R4713		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4714		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R4715		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R4716		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4717		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R4718		ERJ6GMYG753	M.RESISTOR CH 1/10W 75K	1	
R4719		ERJ6GMYG203	M.RESISTOR CH 1/10W 20K	1	
R4720,21		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	2	
R4722		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R4723		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R4724,25		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	2	
R4726		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R4901,02		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	2	
R4903,04		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	2	
R4905,06		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	2	
R4907,08		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	2	
R4909,10		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R4915-18		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	4	
R4921		ERJ6GMYG163	M.RESISTOR CH 1/10W 16K	1	
R4922,23		ERJ6GMYG433	M.RESISTOR CH 1/10W 43K	2	
R4924		ERJ6GMYG163	M.RESISTOR CH 1/10W 16K	1	
R4925		ERJ6GMYG473	M.RESISTOR CH 1/10W 47K	1	
R4926		ERJ6GMYG223	M.RESISTOR CH 1/10W 22K	1	
R4927,28		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	2	
R4929		ERJ6GMYG223	M.RESISTOR CH 1/10W 22K	1	
R4930		ERJ6GMYG473	M.RESISTOR CH 1/10W 47K	1	
R4931		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R6001		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6002,03		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	2	
R6004		EROS2CKG2000	M.RESISTOR 1/4W 200	1	
R6005		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R6006		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6007-09		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	3	
R6010,11		ERJ6GMYG223	M.RESISTOR CH 1/10W 22K	2	
R6012		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6013		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6015,16		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6017		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6018		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6019		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6020,21		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6022-24		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	3	
R6025		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R6027		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R6028		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R6029		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R6030		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R6031		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R6032,33		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	2	
R6034		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6035		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R6036		ERJ6GMYJ123	M.RESISTOR CH 1/10W 12K	1	
R6037,38		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R6039,40		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	2	
R6041		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	1	
R6042		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R6044-49		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	6	
R6050		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6051		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R6052		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R6053		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R6054		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R6055		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R6056,57		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	2	
R6058,59		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6060		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6061,62		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	2	
R6063		ERJ6GMYJ224	M.RESISTOR CH 1/10W 220K	1	
R6064		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R6066		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6067		ERJ6GMYJ181	M.RESISTOR CH 1/10W 180	1	
R6068-70		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	3	
R6071		ERDS2TJ391	C.RESISTOR 1/4W 390	1	
R6074		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R6075		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6076		ERJ6GMYJ563	M.RESISTOR CH 1/10W 56K	1	
R6077		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6078		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6079		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6081		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R6082		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6083-86		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	4	
R6087,88		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	2	
R6089,90		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6091		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6092,93		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	2	
R6094,95		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	2	
R6096		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R6097,98		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6099		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R6100		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6101		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6102,03		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	2	
R6104		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R6106,07		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R6108		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6109		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R6110		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6112		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6113		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R6114		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6116		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6118		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6120		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6122		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6123		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R6124		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6125		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R7302		ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R7303		ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R7304		ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R7305		ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R7306		ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R7307		ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R7308		ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	
R7309		ERDS2TJ102	C.RESISTOR 1/4W 1K	1	
R7310		ERJ6GEYJ474	M.RESISTOR CH 1/10W 470K	1	
R7311		ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R7312		ERJ6GEYJ563	M.RESISTOR CH 1/10W 56K	1	
R7313		ERJ6GEYJ824	M.RESISTOR CH 1/10W 820K	1	
R7314,15		ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	2	
R7316		ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R7317		ERJ6GEYJ393	M.RESISTOR CH 1/10W 39K	1	
R7318		ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R7321		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7322		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R7323		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7324,25		ERJ6GEYJ271	M.RESISTOR CH 1/10W 270	2	
R7329		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R7330		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R7334-37		ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	4	
R7338		ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R7339		ERJ6GEYJ330	M.RESISTOR CH 1/10W 33	1	
R7340		ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R7341		ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R7342		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7345		ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R7346		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R7347		ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R7348		ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R7349		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R7351-53		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	3	
R7354,55		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	2	
R7403		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R7407,08		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R7410-12		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	3	
R7413		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R7414-19		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	6	
R7420		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R7421-23		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	3	
R7425		ERJ6GMYJ154	M.RESISTOR CH 1/10W 150K	1	
R7426		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R7427		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R7428		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R7429		ERJ6GMYJ151	M.RESISTOR CH 1/10W 150	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R7430		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R7431-34		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	4	
R7435		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R7436		ERG1SJ222	M.RESISTOR 1W 2.2K	1	
R7437,38		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	2	
R7440,41		ERJ6GMYJ151	M.RESISTOR CH 1/10W 150	2	
R7901		ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R7902		ERJ3GEYJ821	M.RESISTOR CH 1/16W 820	1	
R7903		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R7904		ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R7905		ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R7906		ERJ6GEYJ150	M.RESISTOR CH 1/10W 15	1	
R7907		ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R7908		ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R7909-12		ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	4	
R7913-15		ERJ3GEYJ682	M.RESISTOR CH 1/16W 6.8K	3	
R7917		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R7918-21		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	4	
R7922		ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1	
R7923		ERJ3GEYJ394	M.RESISTOR CH 1/16W 390K	1	
R7924-26		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	3	
R7927		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R7928		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R7929		ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1	
R7930		ERJ3GEYJ394	M.RESISTOR CH 1/16W 390K	1	
R7931-33		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	3	
R7934		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R7935		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R7936		ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
R7937		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	1	
R7938		ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
R7939		ERJ3GEYJ224	M.RESISTOR CH 1/16W 220K	1	
R7940		ERJ3GEYJ181	M.RESISTOR CH 1/16W 180	1	
R7941		ERJ3GEYJ681	M.RESISTOR CH 1/16W 680	1	
R7942		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	1	
R7943		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R7944		ERJ3GEYJ392	M.RESISTOR CH 1/16W 3.9K	1	
R7945		ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	1	
R7946,47		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	2	
R7948		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R7949		ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	1	
R7950		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R7951,52		ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	2	
R7953		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R7954,55		ERJ3GEYJ823	M.RESISTOR CH 1/16W 82K	2	
R7956		ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	1	
R7957		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R7958,59		ERJ3GEYJ823	M.RESISTOR CH 1/16W 82K	2	
R7960,61		ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	2	
R7964		ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	1	
R7965-72		ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	8	
R7973-77		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	5	
R7978		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R7979		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R7980		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R7981,82		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	2	
R7983,84		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	2	
R7985,86		ERJ3GEYJ271	M.RESISTOR CH 1/16W 270	2	
R7987		ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1	
R7988		ERJ3GEYJ121	M.RESISTOR CH 1/16W 120	1	
R7989		ERDS2TJ823	C.RESISTOR 1/4W 82K	1	
R71001		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R71002		ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R71003		ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R71004		ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R71005		ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R71006		ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R71007		ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R71008		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R71009,10		ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	2	
R71011-14		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	4	
R71016		ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R71017		ERJ6GEYJ393	M.RESISTOR CH 1/10W 39K	1	
R71018		ERJ6GEYJ823	M.RESISTOR CH 1/10W 82K	1	
R71019		ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
RX3401		EXBF8E102J	CAMBI. R-R	1	
SW3901		VSS0385	SWITCH	1	
T0703		EQV5EC071A	TRANSFORMER	1	
T0704		EQV5EC072A	TRANSFORMER	1	
T4701		VLT0695	TRANSFORMER	1	
T4702		VLT0696	TRANSFORMER	1	
T7301		EIR7QG001B	TRANSFORMER	1	
T7302,03		EIL7QH012Q	TRANSFORMER	2	
T7304		EIS5EC017A	TRANSFORMER	1	
T7305		EQS5EC033A	TRANSFORMER	1	
VR301		EVN49CA00B23	V.RESISTOR 2K	1	
VR302		EVN49CA00B13	V.RESISTOR	1	
VR303		EVNCBAA00B13	V.RESISTOR	1	
VR304		EVN49CA00B13	V.RESISTOR	1	
VR0701		EVNCBAA00B24	V.RESISTOR	1	
VR801,02		EVMEASA00B13	V.RESISTOR	2	
VR803		EVMEASA00B14	V.RESISTOR	1	
VR804		EVN49CA00B53	V.RESISTOR	1	
VR2001-05		EVNCYAA03B54	V.RESISTOR	5	
VR3001-03		EVNCYAA03B23	V.RESISTOR	3	
VR3301		EVMEASA00B24	V.RESISTOR	1	
VR3302		EVN49CA00B54	V.RESISTOR	1	
VR3304,05		EVN49CA00B52	V.RESISTOR 500	2	
VR3307		EVN49CA00B54	V.RESISTOR	1	
VR3901		EVMEASA00B24	V.RESISTOR	1	
VR4002		EVNCYAA03B25	V.RESISTOR	1	
VR4501		EVMECSA00B53	V.RESISTOR	1	
VR4502		EVMEASA00BY4	V.RESISTOR	1	
VR4507		EVMEASA00BY4	V.RESISTOR	1	
VR4509		EVMECSA00BY3	V.RESISTOR	1	
VR4512		EVNCBAA00B52	V.RESISTOR	1	
VR4550		EVMECSA00B14	V.RESISTOR	1	
VR4551,52		EVMEASA00B55	V.RESISTOR	2	
VR7301		EVMEASA00B14	V.RESISTOR	1	
VR7326		EVMEASA00B52	V.RESISTOR	1	
VR7328		EVMEASA00B52	V.RESISTOR	1	
VR7340		EVNCBAA00B14	V.RESISTOR	1	
VR7342		EVNCBAA00B53	V.RESISTOR	1	
VR7344		EVNCBAA00B14	V.RESISTOR	1	
VR7901,02		EVNCBAA00B14	V.RESISTOR	2	
VR7903		EVTEASA00B55	V.RESISTOR	1	
X0701		VLF1178	CRYSTAL OSCILLATOR	1	
X0703		EFCT5R5MW5	CRYSTAL OSCILLATOR	1	
X0704		VLF1035	CRYSTAL OSCILLATOR	1	
X801		VSX0406	CRYSTAL OSCILLATOR	1	
X3302		EFOGC3584A5	CRYSTAL OSCILLATOR	1	
X3501		VSX0574	CRYSTAL OSCILLATOR	1	
X6001		VSX0583	CRYSTAL OSCILLATOR	1	
X6002		EFOEC7374T4E	CRYSTAL OSCILLATOR	1	
X7001		VSQ0565	CRYSTAL OSCILLATOR	1	
X7301,02		EFCS5R5MS5	CRYSTAL OSCILLATOR	2	
X7303,04		EFCT5R74MS5B	CRYSTAL OSCILLATOR	2	
X7305		ELB5A016	CRYSTAL OSCILLATOR	1	
X7401		VSX0561	CRYSTAL OSCILLATOR	1	
X7901		VSX0514	CRYSTAL OSCILLATOR	1	
X7902		VSX0512	CRYSTAL OSCILLATOR	1	
X7903		EFCA5504BF	CRYSTAL OSCILLATOR	1	
X71001		VSX0557	CRYSTAL OSCILLATOR	1	
X71002		EFOGC4004A4	CRYSTAL OSCILLATOR	1	
			MISCELLANEOUS		
		VEE9564	EARTH WIRE	1	(TV DEMODU-POWER
					SHIELD CASE)
		VJH0827	RF ANT TERMINAL PLATE	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
		ENG47210G	TUNER	1	<!>
		VEE8682	WIRE CABLE	1	(P1001-P1102)
		VEE8683	WIRE CABLE	1	(P1002-P1103)
		VEE8688	WIRE CABLE	1	(P2001-P2902)
		VEE9001	WIRE CABLE	1	(POWER TR.-P2003)
		VEE8685	WIRE CABLE	1	(P4002-P6502)
		VEE8686	WIRE CABLE	1	(P6003-P7504)
		VEE8837	WIRE CABLE	1	(P3002-P7503)
		VEE9669	WIRE CABLE	1	(P4003-P1509)
		VEE8834	WIRE CABLE	1	(P3003-P9001)
		VEE8835	WIRE CABLE	1	(P6004-P9002)
		VWJ0775	FLAT CARD CABLE	1	(P2004-P1507)
		VWJ0776	FLAT CARD CABLE	1	(P3001-P501)
		VWJ0778	FLAT CARD CABLE	1	(P7401-P7501)
		VWJ0801	FLAT CARD CABLE	1	(P7402-P7502)
		VMA6768	EARTH ANGLE	1	
		VJF1031	CLAMPER	1	
		VMX2233	SPACER	1	FOR SUB Y/C C.B.A.
		VEJ1438	I/O JACK PLATE	1	FOR I/O PACK C.B.A.
		XTV3+8GFZ	SCREW	4	FOR I/O PACK C.B.A.
		VSC3553	SHIELD COVER (MAIN)	1	FOR NICAM C.B.A.
		VSC3554	SHIELD COVER (TOP)	1	FOR NICAM C.B.A.
		VSC3555	SHIELD COVER (BOTTOM)	1	FOR NICAM C.B.A.
		VSC3889	PDC SHIELD COVER	1	FOR PDC C.B.A.
		VSC3890	PDC SHIELD COVER	1	FOR PDC C.B.A.
		VMZ2190	BARRIER	1	FOR PDC C.B.A.
		VMP4471	TV DEMODULATOR ANGLE	1	FOR TV DEMODU. C.B.A.
	■	VEP05176L	HEAD AMP C.B.A.		(RTL)
C503		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
C505-08		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	4	
C509		ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	
C510,11		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C512		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C513		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C514		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C515,16		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C517,18		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C519,20		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C521		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C523		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C524		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C525		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C526		VCEA0JAC221	E.CAPACITOR 6.3V 220U	1	
C527		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C531		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C532		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C533,34		ECUM1H121JCN	C.CAPACITOR CH 50V 120P	2	
C535		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C536		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C537		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C538,39		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	2	
C540		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C551		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C552-54		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C555		ECEA0JPK221	E.CAPACTIOR 6.3V 220U	1	
C556,57		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C559		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
C560,61		ECUM1H471JCN	C.CAPACITOR CH 50V 470P	2	
C562,63		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
C564		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
C565		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C566		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C567		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C569		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
IC501		AN3336SB	IC	1	
IC502		AN3370K	IC	1	
IC551		BA7743FS	IC	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
K501		VLP0145	COIL	1	
K502		ERJ6GMZOR00	M.RESISTOR CH 1/10W 0	1	
K503,04		VLP0145	COIL	2	
K505		ERJ6GMZOR00	M.RESISTOR CH 1/10W 0	1	
K506		VLP0145	COIL	1	
K552		ERJ6GMZOR00	M.RESISTOR CH 1/10W 0	1	
L501-03		VLQ0540K330	COIL 33UH	3	
L504		VLQ0540J5R6	COIL 5.6UH	1	
L551,52		VLQ0540K330	COIL 33UH	2	
P501		VJS3537B020G	CONNECTOR (FEMALE) 20P	1	
P502		VJS2603	CONNECTOR (FEMALE)	1	
Q501		MSB709	TRANSISTOR	1	
Q502		MSD601	TRANSISTOR	1	
QR501		MRN2404	TRANSISTOR-RESISTOR	1	
R501		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R502		ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R503		ERJ6GMYG752	M.RESISTOR CH 1/10W 7.5K	1	
R504		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R505		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R506		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R507		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R508		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R509-12		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	4	
R513		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R514		ERJ6GMYJ274	M.RESISTOR CH 1/10W 270K	1	
R517		ERJ6GMYJ100	M.RESISTOR CH 1/10W 10	1	
R518,19		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	2	
R520		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R521,22		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	2	
R523		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R524		VRE0034E182	M.RESISTOR CH 1/10W 1.8K	1	
R525		VRE0034E103	M.RESISTOR CH 1/10W 10K	1	
R526		ERJ6GMYG133	M.RESISTOR CH 1/10W 13K	1	
R551		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R552		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R553		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R554		ERJ6GMYJ243	M.RESISTOR CH 1/10W 24K	1	
R556		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R557		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R558		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R559,60		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	2	
R561		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R562		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R563		VRE0034E100	M.RESISTOR CH 1/10W 10	1	
R564		ERJ6GMYJ224	M.RESISTOR CH 1/10W 220K	1	
R565		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R566		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R567		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	1	
R568		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R569		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R570		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
			MISCELLANEOUS		
		VSC3714	SHIELD COVER (TOP)	1	
		VSC3478	SHIELD COVER (MAIN)	1	
		VSC3715	SHIELD COVER (BOTTOM)	1	
	■	VEP07739AD	TIMER C.B.A.		(RTL)
C1701		ECEA1CKA101	E.CAPACITOR 16V 100U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C1702		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C1703		ECKD2H471KB	C.CAPACITOR 500V 470P	1	
C1704		ECEA1VKA220	E.CAPACITOR 35V 22U	1	
C1705		ECKF1H103ZF	C.CAPACITOR 50V 0.01U	1	
C1706		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7501		ECRHC030E11	TRIMMER 3P	1	
C7502		ECEA0JKS330	E.CAPACITOR 6.3V 33U	1	
C7503		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7504		ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	1	
C7505,06		ECEA1EKS4R7	E.CAPACITOR 25V 4.7U	2	
C7507,08		ECUM1H473ZFN	C.CAPACITOR CH 50V 0.047U	2	
C7509		ECUM1H060DCN	C.CAPACITOR CH 50V 6P	1	
C7510		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C7511		ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
C7512		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7513		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C7514,15		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C7517		ECEA0JKS470	E.CAPACITOR 6.3V 47U	1	
C7518		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7519-30		ECUM1H270JCN	C.CAPACITOR CH 50V 27P	12	
C7531,32		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C7533-36		ECUM1H270JCN	C.CAPACITOR CH 50V 27P	4	
C7537		ECEA1HKA220	E.CAPACITOR 50V 22U	1	
C7538		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7539		ECUM1H561JCN	C.CAPACITOR CH 50V 560P	1	
D1701		MA1270-H	DIODE	1	
D1702		MA185	DIODE	1	
D7501		MA3075	DIODE	1	
D7502-06		MA221	DIODE	5	
D7510		MA221	DIODE	1	
D7512		MA221	DIODE	1	
D7514		MA221	DIODE	1	
D7517,18		MA221	DIODE	2	
D7520		MA221	DIODE	1	
D7522		MA221	DIODE	1	
D7526		MA221	DIODE	1	
D7532		MA221	DIODE	1	
D7534,35		MA221	DIODE	2	
D7546-53		MA221	DIODE	8	
D7556-61		LN81RCPHL	LED	6	
D7562,63		MA221	DIODE	2	
DP7501		VSL0276	DISPLAY TUBE	1	
IC7501		M37502V4CF	IC	1	
IC7502		PST7026	IC	1	
IC7503		XLJ9021B	IC	1	
IC7504		PST7043	IC	1	
IC7505		BA6810S	IC	1	
K7502		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K7504,05		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	2	
L7501		VLQEL05S101K	COIL 100UH	1	
L7502		VLQ0188J330	COIL 33UH	1	
P7501,02		VJS3537A020G	CONNECTOR (FEMALE) 20P	2	
P7503		VJP3234B010	CONNECTOR (MALE) 10P	1	
P7504		VJP1246T	CONNECTOR (MALE) 6P	1	
P7505,06		VJS2183	CONNECTOR (FEMALE)	2	
PP7501,02		VJP3405A011W	CONNECTOR (MALE) 11P	2	
Q1701		2SD1994A	TRANSISTOR	1	
Q7501,02		MSD601	TRANSISTOR	2	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
QR7501,02		MRN2403	TRANSISTOR-RESISTOR	2	
QR7503		MRN2402	TRANSISTOR-RESISTOR	1	
QR7506		MRN1402	TRANSISTOR-RESISTOR	1	
QR7507		MRN1404	TRANSISTOR-RESISTOR	1	
QR7508-11		MRN2404	TRANSISTOR-RESISTOR	4	
QR7512-14		MRN2403	TRANSISTOR-RESISTOR	3	
R1701		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R1702		ERDS2TJ101	C.RESISTOR 1/4W 100	1	
R1703		ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R7501,02		ERJ6GEYJ820	M.RESISTOR CH 1/10W 82	2	
R7503		ERJ6GEYG223	M.RESISTOR CH 1/10W 22K	1	
R7504		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R7505-07		ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	3	
R7508		ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R7509		ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	1	
R7510		ERJ6GEYK106	M.RESISTOR CH 1/10W 10M	1	
R7511		ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	1	
R7512,13		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R7514-16		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	3	
R7517,18		ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	2	
R7519-22		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	4	
R7525,26		ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	2	
R7527-30		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	4	
R7531-41		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	11	
R7542-56		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	15	
R7557-59		ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	3	
R7560-62		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	3	
R7564		ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R7565		ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R7566		ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R7567		ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R7568		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7569		ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R7570		ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R7571		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7572		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R7573		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7574		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
RX7501,02		EXBF6E104J	RESISTOR-RESISTOR	2	
RX7503		EXBF8E104J	COMBI.R-R 100K	1	
SW7501		ESD172255	SWITCH	1	
SW7502,03		ESD172355	SWITCH	2	
SW7504-07		ESD172255	SWITCH	4	
SW7508,09		ESD172355	SWITCH	2	
SW7510		ESD172255	SWITCH	1	
T1701		ETE13K80AY	TRANSFORMER	1	
VR4004		EVNCBAA00B53	V.RESISTOR	1	
X7501		VSX0506	CRYSTAL OSCILLATOR	1	
X7502		VSX0094	CRYSTAL OSCILLATOR	1	
			MISCELLANEOUS		
		VMD0504	LED HOLDER	6	
		VJF1043	FIP HOLDER	1	
	■	VEP06B45A	VR C.B.A.		(RTL)
C6501,02		ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	2	
C6503,04		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C6505		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C6506		VCEA1HAC3R3	E.CAPACITOR 50V 3.3U	1	
C6507		ECEA1AKA330	E.CAPACITOR 10V 33U	1	
C6508		ECEA1CKA330	E.CAPACITOR 16V 33U	1	
C6509		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6510		ECEA0JK470	E.CAPACITOR 6.3V 47U	1	
C6511-14		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	4	
C6515,16		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
C6518		ECUM1H472KBN	C.CAPACITOR CH 50V 4700P	1	
C6519		ECKF1H472KB	C.CAPACITOR 50V 4700P	1	
IC6501		VCR0172	IC	1	
IR6501		VEK6407	IR RECEIVER UNIT	1	
L6501,02		ELESE471KA	COIL	2	
L6503,04		ELESE221KA	COIL 220UH	2	
L6506,07		ELESE101KA	COIL 100UH	2	
LB6501		VLP0145	COIL	1	
LB6502		VLP0150	INDUCTOR	1	
P6502		VJP1251T	CONNECTOR (MALE) 11P	1	
PS6501,02		VJS3405A011A	CONNECTOR (FEMALE) 11P	2	
R6501		ERJ6GEYG332	M.RESISTOR CH 1/10W 3.3K	1	
R6502		ERJ6GEYG331	M.RESISTOR CH 1/10W 330	1	
R6503,04		ERJ6GEYG271	M.RESISTOR CH 1/10W 270	2	
R6505		ERJ6GEYG332	M.RESISTOR CH 1/10W 3.3K	1	
R6506		ERJ6GEYG331	M.RESISTOR CH 1/10W 330	1	
R6508,09		ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	2	
R6511		ERDS2TYJ470	C.RESISTOR	1	
S6501,02		EVQ11409K	SWITCH	2	
VR6501		EWAKABX15C23	V.RESISTOR	1	
VR6502		EWAKFKX15B24	V.RESISTOR	1	
VR6503		EWANYJX1054J	V.RESISTOR	1	
			MISCELLANEOUS		
		VEJ1429	FRONT JACK	1	
		VYC0599	HIFI REC VR COVER UNIT	1	
		VGU4495	HIFI REC VR KNOB	2	
	■	VEP03A53A	TBC C.B.A.		(RTL)
C9001		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9002		ECQB1H473JZ	F.CAPACITOR 50V 0.047U	1	
C9003		ECEA1HKN010	E.CAPACITOR 50V 1U	1	
C9004		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C9005		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9006		ECEA1HKAR47	E.CAPACITOR 50V 0.47U	1	
C9007		ECQB1H473JZ	F.CAPACITOR 50V 0.047U	1	
C9008		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9009		ECQB1H473JZ	F.CAPACITOR 50V 0.047U	1	
C9010		ECEA1EKA4R7	E.CAPACITOR 25V 4.7U	1	
C9011		ECQB1H333KZ	F.CAPACITOR 50V 0.033U	1	
C9012		ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	
C9013		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C9014		ECEA1HKAR47	E.CAPACITOR 50V 0.47U	1	
C9015		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C9016		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C9017		ECQB1H223KF	P.CAPACITOR 50V 0.022U	1	
C9018		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C9019		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9020,21		ECEA1HKA2R2	E.CAPACITOR 50V 2.2U	2	
C9022		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9023		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9024		ECEA1EKA4R7	E.CAPACITOR 25V 4.7U	1	
C9025		ECUM1H152KBN	C.CAPACITOR CH 50V 1500P	1	
C9026		ECUM1H331JCN	C.CAPACITOR CH 50V 330P	1	
C9027		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9028		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9029		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9030		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9031,32		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C9033		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C9034		ECUM1H270JCN	C.CAPACITOR CH 50V 27P	1	
C9035		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9036,37		ECEA1EKN4R7	E.CAPACITOR 25V 4.7U	2	
C9038		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9039		ECEA0JKA220	E.CAPACITOR 6.3V 220U	1	
C9040		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9041		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9042		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9043-50		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	8	
C9051		ECEA0JKA220	E.CAPACITOR 6.3V 220U	1	
C9052		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9054		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9055		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9056		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9057		ECEA0JKA220	E.CAPACITOR 6.3V 220U	1	
C9058		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9059		ECEA0JKA220	E.CAPACITOR 6.3V 220U	1	
C9060		ECUM1H050CCN	C.CAPACITOR CH 50V 5P	1	
C9061		ECUM1H020CCN	C.CAPACITOR CH 50V 2P	1	
C9062		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C9063		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C9064		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9065		ECUM1H682KBN	C.CAPACITOR CH 50V 6800P	1	
C9066		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9067-70		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	4	
C9071		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9072		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9073		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9076		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9077		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9078		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9079		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9080		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9081,82		ECEA0JKA470	E.CAPACITOR 6.3V 47U	2	
C9083,84		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C9085,86		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C9087		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9088		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9089		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9098-00		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C9101		ECEA0JKA220	E.CAPACITOR 6.3V 220U	1	
C9102		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9103		ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	
C9501		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9502,03		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	2	
C9504		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C9505		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9506		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C9507,08		ECEA1CKA100	E.CAPACITOR 16V 10U	2	
C9509,10		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C9511		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C9512		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9513		ECEA1HKAR22	E.CAPACITOR 50V 0.22U	1	
C9514		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9515		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C9516		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C9517		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C9518		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C9519		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C9520-22		ECEA1CKA100	E.CAPACITOR 16V 10U	3	
C9523,24		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C9525,26		ECEA1CKA100	E.CAPACITOR 16V 10U	2	
D9501		1SS254	DIODE	1	
FL9001-05		VLF0633	FILTER	5	
FL9006		VLF0634	FILTER	1	
FL9007		ELKAW103EB	FILTER	1	
FL9008		VLF0634	FILTER	1	
FL9009		VLF0839	FILTER	1	
FL9010		VLF0838	FILTER	1	
FL9011		VLF0874	FILTER	1	
FL9012		VLF0855	FILTER	1	
FL9013		ELB4P034	FILTER	1	
FL9014		VLF0875	FILTER	1	
FL9015-18		VLF0634	FILTER	4	
FL9019-21		VLF0630	FILTER	3	
FL9022-26		ELKAW103EB	FILTER	5	
FL9501		ELB4H054	FILTER	1	
IC9001		AN3942SB	IC	1	
IC9002		AN3496S	IC	1	
IC9003		MN74HC4066S	IC	1	
IC9004		HA19211BNT	IC	1	
IC9006		AN3915S	IC	1	
IC9007		SC371020FU	IC	1	
IC9008		SC371026FU	IC	1	
IC9501		CXL1009P	IC	1	
IC9502		AN78L09	IC	1	
IC9503		M52055FP	IC	1	
K9001		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K9004		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K9006,07		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	2	
K9010,11		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	2	
K9014		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K9016		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K9018,19		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	2	
L9001		VLQEL05S220J	COIL 22UH	1	
L9002,03		ELESE101K	COIL 100UH	2	
L9004		ELESN680KA	COIL 680UH	1	
L9005		ELESN270KA	COIL 27UH	1	
L9006		VLQ0188J2R2	COIL 2.2UH	1	
L9007		ELESE101K	COIL 100UH	1	
L9008,09		VLQ0188J2R2	COIL 2.2UH	2	
L9010		VLQ0188J6R8	COIL 6.8UH	1	
L9011-14		VLQ0188J2R2	COIL 2.2UH	4	
L9018,19		VLP0054	COIL	2	
L9024		VLP0054	COIL	1	
L9501		ELESE101K	COIL 100UH	1	
L9502		VLP0054	COIL	1	
L9503		VLP0053	COIL	1	
L9504,05		ELESE101K	COIL 100UH	2	
L9506		VLP0054	COIL	1	
P9001		VJP1393T	CONNECTOR (MALE) 13P	1	
P9002		VJP1235T	CONNECTOR (MALE) 8P	1	
Q9001		MSB709	TRANSISTOR	1	
Q9003,04		MSD601	TRANSISTOR	2	
Q9006-09		MSD601	TRANSISTOR	4	
Q9010,11		MSB709	TRANSISTOR	2	
Q9012		MSD601	TRANSISTOR	1	
Q9013		MSB709	TRANSISTOR	1	
Q9014		2SA1022	TRANSISTOR	1	
Q9015		MSD601	TRANSISTOR	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
Q9016		MSC2295	TRANSISTOR	1	
Q9017		MSD601	TRANSISTOR	1	
Q9018		MSB709	TRANSISTOR	1	
Q9019		MSD601	TRANSISTOR	1	
Q9020		MSC2295	TRANSISTOR	1	
Q9021		MSD601	TRANSISTOR	1	
Q9022		MSB709	TRANSISTOR	1	
Q9023		MSD601	TRANSISTOR	1	
Q9024		MSB709	TRANSISTOR	1	
Q9025		MSD601	TRANSISTOR	1	
Q9026,27		MSB709	TRANSISTOR	2	
Q9501,02		MSC2295	TRANSISTOR	2	
Q9503		MSB709	TRANSISTOR	1	
Q9504		MSD601	TRANSISTOR	1	
Q9505		MSB709	TRANSISTOR	1	
Q9506		MSD601	TRANSISTOR	1	
Q9507		MSB709	TRANSISTOR	1	
QR9001		MRN1404	TRANSISTOR-RESISTOR	1	
QR9004		MRN1404	TRANSISTOR-RESISTOR	1	
QR9007		MRN1404	TRANSISTOR-RESISTOR	1	
QR9010		MRN1404	TRANSISTOR-RESISTOR	1	
R9001-04		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	4	
R9005		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9006		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R9007,08		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R9009		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R9010-17		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	8	
R9021-23		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	3	
R9024		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R9027-29		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	3	
R9030		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	1	
R9031		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R9032		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R9037		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R9038		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R9039		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R9040		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	1	
R9041		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R9042		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R9043		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9044		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	1	
R9045		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9046		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R9047,48		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R9049		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	1	
R9050		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R9051,52		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	2	
R9053		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R9054,55		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	2	
R9056		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R9057		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R9058		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R9059,60		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R9061		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	1	
R9062		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R9063		ERJ6GMYJ202	M.RESISTOR CH 1/10W 2K	1	
R9064		ERJ6GMYJ132	M.RESISTOR CH 1/10W 1.3K	1	
R9065		ERJ6GMYJ432	M.RESISTOR CH 1/10W 4.3K	1	
R9066		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	1	
R9067		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R9068-70		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	3	
R9071		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R9072		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R9073		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9074		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R9075		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9076		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R9077		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R9078		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R9079		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R9080,81		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R9082		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R9084		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9087		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R9088		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R9093		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R9094		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9095		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R9096		ERJ6GMYJ123	M.RESISTOR CH 1/10W 12K	1	
R9097		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R9098		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R9099		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R9100,01		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R9104		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R9105		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R9106		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R9107		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R9108,09		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R9501,02		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	2	
R9503,04		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R9505		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R9506		ERJ6GMYJ224	M.RESISTOR CH 1/10W 220K	1	
R9507		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	1	
R9508		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R9509-13		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	5	
R9514,15		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	2	
R9516		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R9517,18		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	2	
R9519		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R9520		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
VR9001		EVMF6SA00B23	V.RESISTOR 2K	1	
VR9002		EVNCYAA03B54	V.RESISTOR	1	
VR9003		EVMF6SA00B13	V.RESISTOR	1	
VR9004		EVNCYAA03B24	V.RESISTOR	1	
VR9005,06		EVMF6SA00B14	V.RESISTOR 10K	2	
VR9007		EVMF6SA00B13	V.RESISTOR	1	
VR9501		EVMF6SA00B23	V.RESISTOR 2K	1	
X9002		VSX0617	CRYSTAL OSCILLATOR	1	
X9501		VSX0323	CRYSTAL OSCILLATOR	1	
			MISCELLANEOUS		
		VSC4116	SHIELD COVER (MAIN)	1	
		VSC3620	SHIELD COVER (BOTTOM)	1	
		VSC3618	SHIELD COVER (TOP)	1	
		XTN3+6F-C	SCREW	4	
		VMX1921	SPACER	1	
	■	VEP01558C	POWER C.B.A.		(RTL) <!>
C1103		VCC0021	C.CAPACITOR	1	<!>
C1106		VCC0021	C.CAPACITOR	1	<!>
C1109		VCC0023	C.CAPACITOR	1	<!>
C1110		ECQU2A224MN	P.CAPACITOR 250V 0.22U	1	<!>
C1111		ECQU2A154MNB	P.CAPACITOR 250V 0.15U	1	<!>
C1112		ECEC2GG680	E.CAPACITOR 400V 68U	1	
C1113		ECQE6473KF	P.CAPACITOR 630V 0.047U	1	
C1114		VCK0106K121	C.CAPACITOR	1	
C1115		ECA1VXLV470	E.CAPACITOR 35V 47U	1	
C1116		ECA1CXLV101	E.CAPACITOR 16V 100U	1	
C1117		ECKF1H102KB	C.CAPACITOR 50V 1000P	1	
C1118		ECKF1H271KB	C.CAPACITOR 50V 270P	1	
C1121		ECCD2H101J	C.CAPACITOR 500V 100P	1	
C1123		ECEA1JFE560	E.CAPACITOR 63V 56U	1	
C1124		ECEA1CFE331	E.CAPACITOR 16V 330U	1	
C1125		ECEA1DFZ681	E.CAPACITOR 20V 680U	1	
C1126		ECEA1AFZ681	E.CAPACITOR 10V 680U	1	
C1127		ECEA1JFE470	E.CAPACITOR 63V 47U	1	
C1128		ECEA1CFE121	E.CAPACITOR 16V 120U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C1129		ECEA1DFZ681	E.CAPACITOR 20V 680U	1	
C1130		ECEA1AFZ681	E.CAPACITOR 10V 680U	1	
C1131-34		ECKF1H102ZF	C.CAPACITOR 50V 1000P	4	
C1135,36		ECA1CGE101X	E.CAPACITOR 16V 100U	2	
C1139		ECKF1H103ZF	C.CAPACITOR 50V 0.01U	1	
C1140,41		ECA1CGE101X	E.CAPACITOR 16V 100U	2	
D1102		EM1B	DIODE	1	<!>
D1103		AP01C	DIODE	1	
D1104		MA178	DIODE	1	
D1105		1SS254	DIODE	1	
D1106		MA4200H	DIODE	1	
D1107		MA723VT	DIODE	1	
D1108		10ELS2	DIODE	1	
D1109		MA185	DIODE	1	
D1110		FMLG12SP	DIODE	1	
D1111		FMBG14L	DIODE	1	
D1112		SV03YS	DIODE	1	
D1115-17		EM1B	DIODE	3	<!>
D1118		MA4056-L	DIODE	1	
D1119		1SS254	DIODE	1	
D1120		MA4120H	DIODE	1	
D1121,22		1SS254	DIODE	2	
IC1101		STRM6547LF	IC	1	<!>
IC1103		SI3120C	IC	1	
IC1104		SI-3050CA	DIODE	1	
L1101,02		ELF18D221F	COIL	2	<!>
L1103-09		EXCELSA35	COIL	7	
L1110		VLP0074	COIL	1	
L1111,12		ELESE101KA	COIL 100UH	2	
L1113,14		ELC07B009	COIL	2	
L1115,16		VLP0083	COIL	2	
P1101		VJS2625	AC INLET	1	<!>
P1102		VJP1930T	CONNECTOR (MALE)	1	
P1103		VJP1149	CONNECTOR (MALE) 3P	1	
Q1101		PC120FY	TRANSISTOR	1	<!>
Q1102		2SD1996-R	TRANSISTOR	1	
R1101		ERC12AGM334	S.RESISTOR 1/2W 330K	1	
R1102		VRE0087	M.RESISTOR 1/16W	1	
R1103		ERG3SJ823	M.RESISTOR 1/16W 82K	1	
R1104,05		ERDS2FJ224	C.RESISTOR 1/4W 220K	2	
R1106		ERDS2FJ221	C.RESISTOR 1/4W 220	1	
R1109		ERDS2FJ561	C.RESISTOR 1/4W 560	1	
R1110		ERDS2FJ391	C.RESISTOR 1/4W 390	1	
R1111		ERX1SJ1R5	M.RESISTOR 1W 1.5	1	
R1112		ERDS2FJ103	C.RESISTOR 1/4W 10K	1	
R1113		ERDS2FJ682	C.RESISTOR 1/4W 6.8K	1	
R1114		ERDS2FJ101	C.RESISTOR 1/4W 100	1	
R1115		ERDS2TJ271	C.RESISTOR 1/4W 270	1	
R1122		EROS2CKG62R0	M.RESISTOR 1/4W 62	1	
R1123		EROS2CKG3001	M.RESISTOR 1/4W 3K	1	
R1124		EROS2CKG20R0	M.RESISTOR 1/4W 20	1	
R1125		EROS2CKG1201	M.RESISTOR 1/4W 1.2K	1	
R1126		ERDS1TJ562	C.RESISTOR 1/2W 5.6K	1	
R1127		ERDS2FJ224	C.RESISTOR 1/4W 220K	1	
T1101		VLT0718	TRANSFORMER	1	<!>
			MISCELLANEOUS		
		VJF0318	FUSE HOLDER	2	<!>
		VMZ2212	CAPACITOR COVER	3	<!>

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
	■	----------	MECHANISM CONNECTION C.B.A.		(RTL)
D1501		LN59L.VT	LED	1	
IC1501,02		ON1387	PHOTO INTERRUPTER	2	
P1503		VJS3316A002	CONNECTOR (FEMALE) 2P	1	
P1504		VJS3820	CONNECTOR (FEMALE)	1	
P1505		VJS3537B014G	CONNECTOR (FEMALE) 14P	1	
Q1501		PT493F1MN	TRANSISTOR	1	
Q1502		PN205L-NC.VT	PHOTO TRANSISTOR	1	
SW1501		VES0695	S-TAB SW	1	
SW1502		VST0176	S-VHS CASSETTE SW	1	
			MISCELLANEOUS		
		VMD2029	REEL GUIDE	1	
		VMD1926	LED HOLDER	1	D1501
		VMD1927	PHOTO TR. HOLDER	1	Q1502
	■	VEX0235	CYLINDER DRIVE C.B.A.		(RTL)
C2901-03		ECEA1VSN2R2	E.CAPACITOR 35V 2.2U	3	
C2904-06		ECUM1E104KBM	C.CAPACITOR CH 25V 0.1U	3	
C2907		ECUM1E683KBM	C.CAPACITOR CH 25V 0.068U	1	
C2908		ECUM1E473KBM	C.CAPACITOR CH 25V 0.047U	1	
C2910		ECEA1CKS100	E.CAPACITOR 16V 10U	1	
C2912		ECEA0JKS220	E.CAPACITOR 6.3V 22U	1	
IC2901		AN3815K	IC	1	
P2901		VJP2603W	CONNECTOR (MALE) 12P	1	
P2902		VJP1232T	CONNECTOR (MALE) 5P	1	
R2901		ERX12SJR47	M.RESISTOR CH 1/2W 0.47	1	
TH2901		VRH0017	THERMISTOR	1	
			MISCELLANEOUS		
		VMA9138	MAIN HOLDER	1	
	■	----------	MOTOR C.B.A.		
			MISCELLANEOUS		
		VJP3316B002	CONNECTOR (FEMALE) 2P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks

27-4. ELECTRICAL REPLACEMENT PARTS FOR NV-HS800BY

Note:1.Be sure to make your orders of replacement parts according to this list.
2.IMPORTANT SAFETY NOTICE : Components identified with the mark <!> have the special characteristics for safety. When replacing any of these components,use only the same type.
3.Unless otherwise specified,
All resistors are in OHMS , K=1,000 OHMS. All capacitors are in MICRO-FARADS(uf),P=uuF.
4.The P.C.Board units marked width'■'show below the main assembled parts.
5.The marking(RTL) indicates the retention time is limited for this item. After the discontinuation of this assembly in production, it will no longer be available.

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
		VEP03C01T	MAIN C.B.A.	1	(RTL)
					INCLUDING THE
					CAP DRIVE C.B.A.
					(VEP02412B),
					LUMINANCE &
					CHROMINANCE PACK
					C.B.A.(VEP03A61F),
					SUB LUMINANCE &
					CHROMINANCE PACK
					C.B.A.(VEP03A62C),
					REC/RF AMP PACK
					C.B.A. (VEP03A90A),
					INPUT/OUTPUT PACK
					C.B.A.(VEP03A72G),
					SUB AUDIO PACK
					C.B.A.(VEP04417C),
					Hi-Fi AUDIO PACK
					C.B.A.(VEP04447PS),
					NICAM DECODER PACK
					C.B.A.(VEP07675G),
					TV DEMODULATOR PACK
					C.B.A.(VEP07801R).
		VEP02412B	CAP DRIVE C.B.A.	1	(RTL)
					INCLUDED IN MAIN
					C.B.A.(VEP03C01T).
		VEP03A61F	LUMINANCE & CHROMINANCE	1	(RTL)
			PACK C.B.A.		INCLUDED IN MAIN
					C.B.A.(VEP03C01T).
		VEP03A62C	SUB LUMINANCE & CHROMINANCE	1	(RTL)
			PACK C.B.A.		INCLUDED IN MAIN
					C.B.A.(VEP03C01T).
					INCLUDING THE
					REC/RF AMP PACK
					C.B.A. (VEP03A90A).
		VEP03A90A	REC/RF AMP PACK C.B.A.	1	(RTL)
					INCLUDED IN
					SUB LUMINANCE &
					CHROMINANCE
					PACK C.B.A.
					(VEP03A62C).
		VEP03A72G	INPUT/OUTPUT PACK C.B.A.	1	(RTL)
					INCLUDED IN MAIN
					C.B.A.(VEP03C01T).
		VEP04417C	SUB AUDIO PACK C.B.A.	1	(RTL)
					INCLUDED IN MAIN
					C.B.A.(VEP03C01T).
		VEP04447PS	Hi-Fi AUDIO PACK C.B.A.	1	(RTL)
					INCLUDED IN MAIN
					C.B.A.(VEP03C01T).
		VEP07675G	NICAM DECODER PACK C.B.A.	1	(RTL)
					INCLUDED IN MAIN
					C.B.A.(VEP03C01T).
		VEP07801R	TV DEMODULATOR PACK C.B.A.	1	(RTL)
					INCLUDED IN MAIN
					C.B.A.(VEP03C01T).

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
		VEP05176L	HEAD AMP C.B.A.	1	(RTL)
		VEP07739Z	TIMER C.B.A.	1	(RTL)
		VEP06B45A	VR C.B.A.	1	(RTL)
		VEP01558C	POWER C.B.A.	1	(RTL)<!>
		----------	MECHANISM CONNECTION C.B.A.	1	
		VEX0235	CYLINDER DRIVE C.B.A.	1	(RTL)
		----------	MOTOR C.B.A.	1	C.B.A. IS INCLUDED
					IN LOADING MOTOR (1)
					UNIT (VEM0427).
		ENG47211G	TUNER	1	<!>
F1101		XBA2C16TH15	FUSE	1	<!>
	■	VEP03C01T	MAIN C.B.A.		(RTL)
C301		ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	
C303		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C305		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C306		ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C307		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C308		ECUM1H050CCN	C.CAPACITOR CH 50V 5P	1	
C309		ECUM1H562KBN	C.CAPACITOR CH 50V 5600P	1	
C310		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C311		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C312		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C313		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C314		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C315,16		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C317		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C318		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C319		ECUM1H080DCN	C.CAPACITOR CH 50V 8P	1	
C321,22		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	2	
C324		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C325,26		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C329		ECQV1H334JM	P.CAPACITOR 50V 0.33U	1	
C331		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C332,33		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C334		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C335		ECEA0JKA220	E.CAPACITOR 6.3V 220U	1	
C336		ECEA1EKN4R7	E.CAPACITOR 25V 4.7U	1	
C337		ECEA1HKN010	E.CAPACITOR 50V 1U	1	
C338		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C339		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C340		ECEA0JKA220	E.CAPACITOR 6.3V 22U	1	
C341		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C342		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C343		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C344		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C345,46		ECEA1CKA100	E.CAPACITOR 16V 10U	2	
C348		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C349		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C350		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C351		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C0701-03		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	3	
C0704		ECUX1H331JCV	C.CAPACITOR CH 50V 330P	1	
C0705		ECUX1H151JCV	C.CAPACITOR CH 50V 150P	1	
C0706		ECEA1HKA0R1	E.CAPACITOR 50V 0.1U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C0707,08		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	2	
C0709		ECUX1H120JCV	C.CAPACITOR CH 50V 12P	1	
C0710		ECUX1H470JPV	C.CAPACITOR CH 50V 47P	1	
C0711		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C0712		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C0714		ECQB1H473JF	P.CAPACITOR 50V 0.047U	1	
C0715		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C0716		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C0717		ECUX1H270JPV	C.CAPACITOR CH 50V 27P	1	
C0718		ECEA1HKAR47	E.CAPACITOR 50V 0.47U	1	
C0719		ECUX1H150JCV	C.CAPACITOR CH 50V 15P	1	
C0720		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C0722		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C0723		ECEA1HKA0R1	E.CAPACITOR 50V 0.1U	1	
C0724		ECQB1H473JF	P.CAPACITOR 50V 0.047U	1	
C0726		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C0727		ECKF1H103ZF	C.CAPACITOR 50V 0.01U	1	
C0729		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C0730		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C0733		ECKF1H103ZF	C.CAPACITOR 50V 0.01U	1	
C802		ECUM1H471JCN	C.CAPACITOR CH 50V 470P	1	
C803		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C804		ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	
C805,06		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C808		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C809		ECEA1HKA4R7	E.CAPACITOR 50V 4.7U	1	
C810		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C811-13		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C814		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C815		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C816		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C817		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C818		ECEA1HKA0R1	E.CAPACITOR 50V 0.1U	1	
C819		ECQB1H332JZ	F.CAPACITOR 50V 3300P	1	
C820		ECUM1H331JCN	C.CAPACITOR CH 50V 330P	1	
C821-23		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C824		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C825-27		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C828,29		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	2	
C830		ECUM1H471JCN	C.CAPACITOR CH 50V 470P	1	
C831		ECUM1H270JCN	C.CAPACITOR CH 50V 27P	1	
C832		ECQV1H154JM	P.CAPACITOR 50V 0.15U	1	
C833		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C834		ECUM1H151JCN	C.CAPACITOR CH 50V 150P	1	
C835		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C836		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C1001		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C1002		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C1003		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C2001		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C2003		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C2005		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C2006		ECEA1HKAR47	E.CAPACITOR 50V 0.47U	1	
C2007		ECQV1H683JM	P.CAPACITOR 50V 0.068U	1	
C2009		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C2010		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C2501-04		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	4	
C2505		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C2506		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C2507		ECQV1H683JM	P.CAPACITOR 50V 0.068U	1	
C2508-10		ECEA1HKA2R2	E.CAPACITOR 50V 2.2U	3	
C2511-14		ECUM1E333KBN	C.CAPACITOR CH 25V 0.033U	4	
C2515		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C2516		ECEA1HKAR22	E.CAPACITOR 50V 0.22U	1	
C2517		ECA0JM221	E.CAPACITOR 6.3V 220U	1	
C2518		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C2519,20		ECUM1E333KBN	C.CAPACITOR CH 25V 0.033U	2	
C2521		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C2522		ECEA1HKNR47	E.CAPACITOR 50V 0.47U	1	
C2523		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C2524,25		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	2	
C2526		ECA0JM221	E.CAPACITOR 6.3V 220U	1	
C2527		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C2528		ECEA1HKNR47	E.CAPACITOR 50V 0.47U	1	
C2529		ECEA1CKA101	E.CAPACITOR 16V 100U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C2530		ECEA1HKN010	E.CAPACITOR 50V 1U	1	
C2531		ECUM1E224ZFN	C.CAPACITOR CH 25V 0.22U	1	
C2532		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C2533		ECEA0JKA330	E.CAPACOTOR 6.3V 33U	1	
C2534,35		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	2	
C3001		ECUM1H471JCN	C.CAPACITOR CH 50V 470P	1	
C3002		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C3003-06		ECEA1HKA010	E.CAPACITOR 50V 1U	4	
C3007,08		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C3009		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C3010		ECA1AM331	E.CAPACITOR 10V 330U	1	
C3011		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C3012		ECA1AM331	E.CAPACITOR 10V 330U	1	
C3013		ECA0JM331	E.CAPACITOR 6.3V 330U	1	
C3014		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C3015		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3016		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3017-19		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	3	
C3022		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3023,24		ECEA1AKA330	E.CAPACITOR 10V 33U	2	
C3027,28		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	2	
C3029		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3030		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3031		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C3032		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3033		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C3301		ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	
C3302		ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	
C3304-08		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	5	
C3309		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3310		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3312-14		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C3321		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3322		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C3323		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3324		ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C3325		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3326		ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C3327,28		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C3329		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3330		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3336		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3338		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3339		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3340		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C3341		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3342		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C3343		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3344		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C3345		ECUM1H391JCN	C.CAPACITOR CH 50V 390P	1	
C3346		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3347		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C3351,52		ECUM1H181JCN	C.CAPACITOR CH 50V 180P	2	
C3353		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C3354		ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
C3372		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C3401		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C3402		ECUM1H080DCN	C.CAPACITOR CH 50V 8P	1	
C3403-07		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	5	
C3408,09		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	2	
C3421		ECUM1H472KBN	C.CAPACITOR CH 50V 4700P	1	
C3422		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3423		ECUM1H050CCN	C.CAPACITOR CH 50V 5P	1	
C3424		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C3425		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3426		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3427		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3428		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3429		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3430		ECEA0JKA330	E.CAPACOTOR 6.3V 33U	1	
C3431		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3443		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3444		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3445		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3447		ECUM1H121JCN	C.CAPACITOR CH 50V 120P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C3448		ECUM1H151JCN	C.CAPACITOR CH 50V 150P	1	
C3449		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C3450,51		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C3452		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3472		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3473		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3474		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3475-77		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C3501		ECA0JM471	E.CAPACITOR 6.3V 470U	1	
C3502		ECRHA030E54R	TRIMMER 3P	1	
C3503		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3504		ECQB1H223JF	P.CAPACITOR 50V 0.022U	1	
C3505		ECEA1HKN010	E.CAPACITOR 50V 1U	1	
C3506		ECQB1H682JZ	F.CAPACITOR 50V 6800P	1	
C3507		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C3508		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C3509		ECUM1H122KBN	C.CAPACITOR CH 50V 1200P	1	
C3510		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3511		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C3512		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3513		ECUM1H080DCN	C.CAPACITOR CH 50V 8P	1	
C3514,15		ECEA1CKA100	E.CAPACITOR 16V 10U	2	
C3516,17		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	2	
C3518		ECEA1HKAR47	E.CAPACITOR 50V 0.47U	1	
C3519		ECUM1H221JCN	C.CAPACITOR CH 50V 220P	1	
C3520		ECEA1CKA330	E.CAPACITOR 16V 33U	1	
C3521		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3522		ECEA1CKA330	E.CAPACITOR 16V 33U	1	
C3523		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3524		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C3525-27		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C3528		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C3529		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3530		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3531		ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C3532		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3533		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C3534		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3601		ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	
C3602		ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
C3603		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3604		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C3605		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3606		ECUM1H681JCN	C.CAPACITOR CH 50V 680P	1	
C3607		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3608		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C3609		ECUM1H271JCN	C.CAPACITOR CH 50V 270P	1	
C3610		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3611		ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	
C3613		ECUM1H181JCN	C.CAPACITOR CH 50V 180P	1	
C3614		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C3901-05		ECEA1CKA100	E.CAPACITOR 16V 10U	5	
C3906		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3907		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C3908		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3909,10		ECA1AM471	E.CAPACITOR 10V 470U	2	
C3911		ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	
C3912		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C3913		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3914		ECEA1EK3R3	E.CAPACITOR 25V 3.3U	1	
C3915		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C3916		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3917		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C3918		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C3919		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3922		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3923		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C3924		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3927		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C4001,02		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C4003,04		ECEA1CKA100	E.CAPACITOR 16V 10U	2	
C4005		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C4006		ECUM1C224ZFN	C.CAPACITOR CH 16V 0.22U	1	
C4007		ECEA1CPZ101	E.CAPACITOR 16V 100U	1	
C4008		ECUM1C224ZFN	C.CAPACITOR CH 16V 0.22U	1	
C4009		ECEA1CPZ101	E.CAPACITOR 16V 100U	1	
C4010		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C4011,12		ECUM1H122KBN	C.CAPACITOR CH 50V 1200P	2	
C4501		ECQB1H152JZ	F.CAPACITOR 50V 1500P	1	
C4502		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4503		ECUX1H152KBV	C.CAPACITOR CH 50V 1500P	1	
C4504,05		ECEA1CU470	E.CAPACITOR 16V 47U	2	
C4506		ECEA1CU100	E.CAPACITOR 16V 10U	1	
C4507		ECQB1H223JF	P.CAPACITOR 50V 0.022U	1	
C4508		ECEA1EB24R7	E.CAPACITOR 25V 4.7U	1	
C4509		ECEA1AU470	E.CAPACITOR 10V 47U	1	
C4510		ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C4511		ECQB1H332JF	P.CAPACITOR 50V 3300P	1	
C4512		ECUX1H561JV	C.CAPACITOR CH 50V 560P	1	
C4513		ECUX1H681JV	C.CAPACITOR CH 50V 680P	1	
C4514		ECUX1H561JV	C.CAPACITOR CH 50V 560P	1	
C4515		ECEA1EU4R7	E.CAPACITOR 25V 4.7U	1	
C4517		ECEA1AU101	E.CAPACITOR 10V 100U	1	
C4518		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4521		ECUM1E473KBN	C.CAPACITOR CH 25V 0.047U	1	
C4522		ECEA1HU3R3	E.CAPACITOR 50V 3.3U	1	
C4528		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4530		ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C4533		ECEA1CU330	E.CAPACITOR 16V 33U	1	
C4537		ECUX1H102JCV	C.CAPACITOR CH 50V 1000P	1	
C4538		ECEA1HUR47	E.CAPACITOR 50V 0.47U	1	
C4539		ECUX1C224ZFV	C.CAPACITOR CH 16V 0.22U	1	
C4541		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4545		ECUX1H102KBV	C.CAPACITOR CH 50V 1000P	1	
C4551		ECQB1H223JF	P.CAPACITOR 50V 0.022U	1	
C4552		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4556		ECEA1CU100	E.CAPACITOR 16V 10U	1	
C4558		ECEA1EB24R7	E.CAPACITOR 25V 4.7U	1	
C4559		ECEA1AU470	E.CAPACITOR 10V 47U	1	
C4560		ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C4561		ECQB1H332JF	P.CAPACITOR 50V 3300P	1	
C4562		ECUX1H561JV	C.CAPACITOR CH 50V 560P	1	
C4563		ECUX1H681JV	C.CAPACITOR CH 50V 680P	1	
C4564		ECUX1H561JV	C.CAPACITOR CH 50V 560P	1	
C4565		ECEA1EU4R7	E.CAPACITOR 25V 4.7U	1	
C4567		ECEA1AU101	E.CAPACITOR 10V 100U	1	
C4568		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4572		ECEA1HU3R3	E.CAPACITOR 50V 3.3U	1	
C4576		ECUM1E473KBN	C.CAPACITOR CH 25V 0.047U	1	
C4583		ECEA1CU330	E.CAPACITOR 16V 33U	1	
C4585,86		ECEA1AU101	E.CAPACITOR 10V 100U	2	
C4591		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4592		ECUX1H152KBV	C.CAPACITOR CH 50V 1500P	1	
C4593		ECUX1H102JCV	C.CAPACITOR CH 50V 1000P	1	
C4594,95		ECUX1H471JCV	C.CAPACITOR CH 50V 470P	2	
C4596		ECEA1CU100	E.CAPACITOR 16V 10U	1	
C4597		ECUX1H330JCV	C.CAPACITOR CH 50V 33P	1	
C4598		ECUX1H102JCV	C.CAPACITOR CH 50V 1000P	1	
C4604		ECUM1H182JN	C.CAPACITOR CH 50V 1800P	1	
C4606		ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C4611		ECQB1H182JZ	F.CAPACITOR 50V 1800P	1	
C4613		ECUX1H821JCV	C.CAPACITOR CH 50V 820P	1	
C4616		ECUX1H102ZFV	C.CAPACITOR CH 50V 1000P	1	
C4617		ECEA10M22	E.CAPACITOR 10V 22U	1	
C4618		ECQB1H822JZ	F.CAPACITOR 50V 8200P	1	
C4621		ECEA0JU101	E.CAPACITOR 6.3V 100U	1	
C4629		ECQB1H562JZ	P.CAPACITOR 50V 5600P	1	
C4636		ECUX1H471JV	C.CAPACITOR CH 50V 470P	1	
C4638		ECQB1H822JZ	F.CAPACITOR 50V 8200P	1	
C4652,53		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	2	
C4701		ECCD2H181J	C.CAPACITOR 500V 180P	1	
C4702		ECQP1222JZ	P.CAPACITOR 100V 2200P	1	
C4703		ECQB1H102JF	P.CAPACITOR 50V 1000P	1	
C4704		ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C4705		ECEA16M33	E.CAPACITOR 16V 33U	1	
C4706		ECQV1H104JM	P.CAPACITOR 50V 0.1U	1	
C4707		ECQB1H223JF	P.CAPACITOR 50V 0.022U	1	
C4708		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C4709		ECQB1H472JF	P.CAPACITOR 50V 4700P	1	
C4710		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C4711,12		ECEA1AKA220	E.CAPACITOR 10V 22U	2	
C4713		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C4714		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C4901,02		ECQB1H103JZ	P.CAPACITOR 50V 0.01U	2	
C4903,04		ECQB1H332JZ	F.CAPACITOR 50V 3300P	2	
C4905,06		VCEA1CAD100	E.CAPACITOR 16V 10U	2	
C4907,08		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
C4909,10		ECQB1H103JZ	P.CAPACITOR 50V 0.01U	2	
C4911,12		ECQB1H332JZ	F.CAPACITOR 50V 3300P	2	
C4913,14		VCEA1CAD100	E.CAPACITOR 16V 10U	2	
C4915,16		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
C4917,18		ECQB1H103JZ	P.CAPACITOR 50V 0.01U	2	
C4919,20		ECQB1H332JZ	F.CAPACITOR 50V 3300P	2	
C4923,24		VCEA0JAC101	E.CAPASITOR 6.3V 100U	2	
C6001		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6002		ECEA0JKA330	E.CAPACITOR 6.3V 33U	1	
C6003		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6004		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C6005		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6006		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C6007,08		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	2	
C6009		ECUM1H472KBN	C.CAPACITOR CH 50V 4700P	1	
C6010		ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	1	
C6011		ECUM1H472KBN	C.CAPACITOR CH 50V 4700P	1	
C6012		ECUM1H392KBN	C.CAPACITOR CH 50V 3900P	1	
C6013		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C6014		ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C6015		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C6016,17		ECEA1HKN3R3	E.CAPACITOR 50V 3.3U	2	
C6018		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C6019		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6020		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C6021		ECEA16M10	E.CAPACITOR 16V 1U	1	
C6022		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C6023		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C6024		ECEA1HKA4R7	E.CAPACITOR 50V 4.7U	1	
C6025		ECUM1H392KBN	C.CAPACITOR CH 50V 3900P	1	
C6026		ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	1	
C6027		ECUM1E104KBN	C.CAPACITOR CH 25V 0.1U	1	
C6028		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C6029		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C6030		EECS5R5T224N	E.CAPACITOR 5.5V 0.22U	1	
C6034		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6035		ECEA1CKA330	E.CAPACITOR 16V 33U	1	
C6036		ECEA0JKA330	E.CAPACITOR 6.3V 33U	1	
C6037		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6038		ECEA1AKA470	E.CAPACITOR 10V 47U	1	
C6040		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6041		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C6042		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6043		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C6045		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6046		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6049		ECUM1H271JCN	C.CAPACITOR CH 50V 270P	1	
C6050,51		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	2	
C6053-56		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	4	
C6062		ECUM1H271JCN	C.CAPACITOR CH 50V 270P	1	
C6063		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C7408		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7409		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C7410		ECUM1H563ZFN	C.CAPACITOR CH 50V 0.056U	1	
C7411		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7412		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7413		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C7414		ECUM1H821JCN	C.CAPACITOR CH 50V 820P	1	
C7415		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7416		ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	
C7418		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C7419		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C7420		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7421		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C7422,23		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C7424		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C7425		ECEA1HKA100	E.CAPACITOR 50V 10U	1	
C7426		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C7427		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7428		ECEA1HKA2R2	E.CAPACITOR 50V 2.2U	1	
C7429		ECEA1CSN100	E.CAPACITOR 16V 10U	1	
C7901-03		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	3	
C7904		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C7905		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7906		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C7907		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7908		ECQV1H104JM	P.CAPACITOR 50V 0.1U	1	
C7909		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7910		ECEA1CK100	E.CAPACITOR 16V 10U	1	
C7911-13		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	3	
C7914		ECEA0JK470I	E.CAPACITOR 6.3V 47U	1	
C7915		ECUX1H100DCV	C.CAPACITOR CH 50V 10P	1	
C7916		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7917		ECEA0JK470I	E.CAPACITOR 6.3V 47U	1	
C7918		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7919		ECEA0JK470I	E.CAPACITOR 6.3V 47U	1	
C7920		ECEA1CK100	E.CAPACITOR 16V 10U	1	
C7921		ECQB1H102JH	P.CAPACITOR 50V 1000P	1	
C7922		ECQB1H272JH	P.CAPACITOR 50V 2700P	1	
C7923		ECUX1H151JCV	C.CAPACITOR CH 50V 150P	1	
C7924		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C7925		ECUX1H561JCV	C.CAPACITOR CH 50V 560P	1	
C7926		ECEA1CK100	E.CAPACITOR 16V 10U	1	
C7927		ECQB1H102JH	P.CAPACITOR 50V 1000P	1	
C7928		ECQB1H272JH	P.CAPACITOR 50V 2700P	1	
C7929		ECUX1H151JCV	C.CAPACITOR CH 50V 150P	1	
C7930		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C7931		ECUX1H561JCV	C.CAPACITOR CH 50V 560P	1	
C7932,33		ECEA1CKN100	E.CAPACITOR 16V 10U	2	
C7934		ECUX1H220JCV	C.CAPACITOR CH 50V 22P	1	
C7935		ECUX1H470JCV	C.CAPACITOR CH 50V 47P	1	
C7937		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7938		ECEA1HKR47	E.CAPACITOR 50V 0.47U	1	
C7939,40		ECEA1HKN0R1	E.CAPACITOR 50V 0.1U	2	
C7941		ECEA1HKR47	E.CAPACITOR 50V 0.47U	1	
C7942		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7943		ECUX1H100DCV	C.CAPACITOR CH 50V 10P	1	
C7945		ECUX1H101JCV	C.CAPACITOR CH 50V 100P	1	
C7946		ECUX1H220JCV	C.CAPACITOR CH 50V 22P	1	
C7947		ECEA1HKR47	E.CAPACITOR 50V 0.47U	1	
C7948		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7949		ECEA0JK330	E.CAPACITOR 6.3V 33U	1	
C7950-53		ECEA1CKN100	E.CAPACITOR 16V 10U	4	
C7954		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C7955-58		ECEA1CK100	E.CAPACITOR 16V 10U	4	
C7960		ECEA1CK100	E.CAPACITOR 16V 10U	1	
C7961		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7963		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7964		ECEA1CK100	E.CAPACITOR 16V 10U	1	
C7965,66		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	2	
C7967		ECEA1CK100	E.CAPACITOR 16V 10U	1	
D301		1SS283	DIODE	1	
D303		MA151WK	DIODE	1	
D305		1SS254	DIODE	1	
D306		MA723VT	DIODE	1	
D307		1SS254	DIODE	1	
D308,09		MA151WK	DIODE	2	
D801-07		1SS254	DIODE	7	
D808		MA151WK	DIODE	1	
D1002		1SS254	DIODE	1	
D2001-05		1SS254	DIODE	5	
D2501-08		1SS254	DIODE	8	
D2510		1SS254	DIODE	1	
D3002		MA28W-A	DIODE	1	
D3003		1SS254	DIODE	1	
D3301		1SS254	DIODE	1	
D3302		MA151K	DIODE	1	
D3304		MA151K	DIODE	1	
D3403		MA723VT	DIODE	1	
D3408		1SS254	DIODE	1	
D3501		1SS254	DIODE	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
D3502		MA153	DIODE	1	
D3504		MA151WK	DIODE	1	
D3901		1SS254	DIODE	1	
D3902		MA4130L	DIODE	1	
D3903		1SS254	DIODE	1	
D3904		MA151WK	DIODE	1	
D3906		MA151WA	DIODE	1	
D3908,09		1SS254	DIODE	2	
D4003		MA723VT	DIODE	1	
D4004		1SS254	DIODE	1	
D4501-04		MA141K	DIODE	4	
D4601,02		MA141K	DIODE	2	
D4701,02		1SS254	DIODE	2	
D6001		1SS254	DIODE	1	
D6002		MA723VT	DIODE	1	
D6003		1SS254	DIODE	1	
D6005		MA151WK	DIODE	1	
D6006		MA151WA	DIODE	1	
D6007		MA151WK	DIODE	1	
D6008		MA151WA	DIODE	1	
D6009		11EQS04	DIODE	1	
D6011,12		11EQS04	DIODE	2	
D6013		MA723VT	DIODE	1	
D6014		1SS254	DIODE	1	
D6015		MA723VT	DIODE	1	
D7402		MA4300M	DIODE	1	
D7404		MA151WK	DIODE	1	
D7405		1SS254	DIODE	1	
D7901,02		MA141WK	DIODE	2	
D7904		MA141K	DIODE	1	
D7905		MA141WA	DIODE	1	
D7906		MA141WK	DIODE	1	
D7907		MA141K	DIODE	1	
DL801		EFDUN124A13N	DELAY	1	
DL802		EFDVR645A45A	DELAY LINE	1	
DL803		VLD0147	DELAY LINE	1	
FL301		ELB4M022	FILTER	1	
FL302		VLF0639	FILTER	1	
FL801		VLF1079	FILTER	1	
FL3601		ELB4R031	FILTER	1	
FL3901		VLF1120	FILTER	1	
FL3902		VLF0765	FILTER	1	
FL7901		VLF0702	FILTER	1	
FL7902		ELKAW103EB	FILTER	1	
FL7903		ELKAW101GB	FILTER	1	
FL7904,05		ELKAW103EB	FILTER	2	
FL7907-11		ELKAW103EB	FILTER	5	
FL7914,15		ELKAW101GB	FILTER	2	
FL7916		VLF0633	FILTER	1	
IC301		VEFH20B	HIC	1	
IC302		MN3859S	IC	1	
IC303		AN1358S	IC	1	
IC0701		LA7576	IC	1	
IC801		VCR0383	IC	1	
IC802		M52352FP	IC	1	
IC2001		AN3727S	IC	1	
IC2002		UPD4053BG	IC	1	
IC2501		BA6219B	IC	1	
IC2502		LM358PS	IC	1	
IC2503		XRA6439S	IC	1	
IC2504		LM358PS	IC	1	
IC2505		LM393P	IC	1	
IC3001		AN3581S	IC	1	
IC3002		M52055FP	IC	1	
IC3301		M52083FP	IC	1	
IC3401		NJM2233BMA	IC	1	
IC3403		MN155202VZAM	IC	1	
IC3404		MN1280S	IC	1	
IC3405		UPD4066BG	IC	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
IC3501		LC74760	IC	1	
IC3502		M52055FP	IC	1	
IC3503		NJM2246DA	IC	1	
IC3504		NJM2233BMA	IC	1	
IC3601		AN6308S	IC	1	
IC3901		M52475AP	IC	1	
IC3902		AN3916	IC	1	
IC3904		AN1393S	IC	1	
IC4001		NJM4565DD	IC	1	
IC4501		XLH7773AKS	IC	1	
IC4601		BA7755AF	IC	1	
IC4701		AN1358S	IC	1	
IC4702		MN4066BS	IC	1	
IC4901		LA7155M	IC	1	
IC6001		MN6755320H3W	IC	1	
IC6002		M38024V1BH	IC	1	
IC6003		MN1280S	IC	1	
IC6005		UPD4052BG	IC	1	
IC6008		TL431CLP	IC	1	
IC7401		M66006FP	IC	1	
IC7402		LA7217M	IC	1	
IC7901		TB1204F	IC	1	
IC7902		TA2009F	IC	1	
IC7903		M5238FP	IC	1	
J3901,02		VJS1470	21PIN SKIRT JACK	2	
K2		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
K4		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
K6		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
K101,02		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
K0702		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
K0704-06		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	3	
K3003		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K3005,06		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	2	
K3010-12		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	3	
K3909		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K4901,02		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	2	
K6001		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K6003-05		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	3	
K6016		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K7404		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K7409,10		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	2	
K7417		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
L302		VLQ0188J180	COIL 18UH	1	
L304		VLQ0188J270	COIL 27UH	1	
L305		VLQ0188J101	COIL 100UH	1	
L306		VLQ0188J390	COIL 39UH	1	
L309-11		VLQ0188J330	COIL 33UH	3	
L312		ELESN121JA	COIL 120UH	1	
L0701		VLQ0163JR22	COIL 0.22UH	1	
L0705		VLQ0163J2R7	COIL 2.7UH	1	
L0706		VLQEL05S8R2J	COIL 8.2UH	1	
L801,02		ELESE681KA	COIL 680UH	2	
L803		ELESN331KA	COIL 330UH	1	
L804		VLQ0407101K	COIL 100UH	1	
L806		VLQ0407101K	COIL 100UH	1	
L807,08		VLQ0188J150	COIL 15UH	2	
L809		VLQ0188J330	COIL 33UH	1	
L810		VLQ0188J150	COIL 15UH	1	
L811		VLQ0188J151	COIL 150UH	1	
L812		VLQ0188J270	COIL 27UH	1	
L813,14		VLQ0188J150	COIL 15UH	2	
L2001		VLQ0569	COIL	1	
L2002		VLQ0556	COIL	1	
L2501		VLP0074	COIL	1	
L2502		ELESE330KA	COIL 33UH	1	
L2503		ELESE102KA	COIL 1000UH	1	
L3001-03		VLQ0188J330	COIL 33UH	3	
L3004		VLQ0398	COIL	1	
L3301		VLQ0188J150	COIL 15UH	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
L3304		VLQ0188J330	COIL 33UH	1	
L3306		VLQ0188J390	COIL 39UH	1	
L3307		VLQ0188J120	COIL 12UH	1	
L3308		VLQ0188J330	COIL 33UH	1	
L3309		VLQ0188J181	COIL 180UH	1	
L3310		VLQ0188J270	COIL 27UH	1	
L3313		ELESE681KA	COIL 680UH	1	
L3315,16		VLQ0188J5R6	COIL 5.6UH	2	
L3318		VLQ0188J330	COIL 33UH	1	
L3323		VLQ0188J330	COIL 33UH	1	
L3401		VLQ0188J150	COIL 15UH	1	
L3404		VLQ0188J220	COIL 22UH	1	
L3405		VLQ0188J330	COIL 33UH	1	
L3412		VLQ0188J330	COIL 33UH	1	
L3415		VLQ0188J120	COIL 12UH	1	
L3501		VLQ0188J330	COIL 33UH	1	
L3502		VLQ0188J5R6	COIL 5.6UH	1	
L3503		VLQ0188J100	COIL 10UH	1	
L3504		VLQ0188J390	COIL 39UH	1	
L3505		VLQ0188J820	COIL 82UH	1	
L3508		VLQ0188J330	COIL 33UH	1	
L3601		VLQEL05T120	COIL 12UH	1	
L3602,03		VLQEL05S101K	COIL 100UH	2	
L3604		VLQEL05S151J	COIL 150UH	1	
L3605		VLQEL05S820K	COIL 82UH	1	
L3901-04		ELESE101KA	COIL 100UH	4	
L3906		VLQ0188J1R0	COIL 1UH	1	
L4001,02		ELESE101KA	COIL 100UH	2	
L4501,02		ELESE101KA	COIL 100UH	2	
L4601		VLQEL07F153	COIL	1	
L4701		ELESE471KA	COIL	1	
L4702		ELESE101KA	COIL 100UH	1	
L4901,02		ELESE102KA	COIL 1000UH	2	
L4903,04		ELESE101KA	COIL 100UH	2	
L4905,06		ELESE102KA	COIL 1000UH	2	
L4907,08		ELESE101KA	COIL 100UH	2	
L4909,10		ELESE102KA	COIL 1000UH	2	
L6001		VLP0083	COIL	1	
L6002		ELESE101KA	COIL 100UH	1	
L6003		VLP0083	COIL	1	
L6007,08		VLP0083	COIL	2	
L6009		ELESE101KA	COIL 100UH	1	
L7407		VLQ0599J1R0	COIL 1UH	1	
L7408-12		VLQ0599J680	COIL 68UH	5	
L7901,02		VLP0083	COIL	2	
P1001		VJP2593	CONNECTOR (MALE)	1	
P1002		VJP1142	CONNECTOR (MALE)	1	
P2001		VJP1232T	CONNECTOR (MALE) 5P	1	
P2003		VJP3502	CONNECTOR (MALE)	1	
P2004		VJS3537A015G	CONNECTOR (FEMALE) 15P	1	
P3001		VJS3537A020G	CONNECTOR (FEMALE) 20P	1	
P3002		VJP3233A010	CONNECTOR (MALE) 10P	1	
P4001		VJS2331	CONNECTOR (FEMALE)	1	
P4002		VJP1238T	CONNECTOR (MALE) 11P	1	
P4003		VJP1230T	CONNECTOR (MALE) 3P	1	
P6001		VJS3537A014G	CONNECTOR (FEMALE) 14P	1	
P6003		VJP1233T	CONNECTOR (MALE) 6P	1	
P6502		VJS1744T	CONNECTOR (FEMALE)	1	
PK0701		VJR0816A010W	CONNECTOR (MALE) 10P	1	
PK4001-03		VJR0757B018T	CONNECTOR (MALE) 18P	3	
PK7901,02		VJR0477	PACK PIN	2	
PP0701		VJP3589A004B	CONNECTOR (MALE) 4P	1	
PP2001		VJP3042A012W	CONNECTOR (MALE) 12P	1	
PP2002		VJP3042A010W	CONNECTOR (MALE) 10P	1	
PP3001		VJP3042A009W	CONNECTOR (MALE) 9P	1	
PP3002		VJP3042A012W	CONNECTOR (MALE) 12P	1	
PP3003		VJP3042A013W	CONNECTOR (MALE) 13P	1	
PP3011,12		VJP3042A018W	CONNECTOR (MALE) 18P	2	
PP3013		VJP3042A014W	CONNECTOR (MALE) 14P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
PP3021-24		VJP3043A012W	CONNECTOR (MALE) 12P	4	
PP3301		VJP3042A011W	CONNECTOR (MALE) 11P	1	
PP4501		VJP3042A017W	CONNECTOR (MALE) 17P	1	
PP7406		VJP3043A010W	CONNECTOR (MALE) 10P	1	
PS301		VJS3042B009W	CONNECTOR (FEMALE) 9P	1	
PS302		VJS3042B012W	CONNECTOR (FEMALE) 12P	1	
PS303		VJS3042B013W	CONNECTOR (FEMALE) 13P	1	
PS2001		VJS3042B012W	CONNECTOR (FEMALE) 12P	1	
PS2002		VJS3042B010W	CONNECTOR (FEMALE) 10P	1	
PS3021-24		VJS3043B012W	CONNECTOR (FEMALE) 12P	4	
PS3302,03		VJS3042B018W	CONNECTOR (FEMALE) 18P	2	
PS3501		VJS3042F014W	CONNECTOR (FEMALE) 14P	1	
PS3601		VJS3042B011W	CONNECTOR (FEMALE) 11P	1	
PS4701		VJS3042B017W	CONNECTOR (FEMALE) 17P	1	
Q301		MSC2295	TRANSISTOR	1	
Q302		MSB709	TRANSISTOR	1	
Q303,04		MSC2295	TRANSISTOR	2	
Q305		MSD601	TRANSISTOR	1	
Q306		MSC2295	TRANSISTOR	1	
Q307,08		MSB709	TRANSISTOR	2	
Q0701		MSD601-S	TRANSISTOR	1	
Q0702		MSB709	TRANSISTOR	1	
Q801		2SA1022	TRANSISTOR	1	
Q802		MSC2295	TRANSISTOR	1	
Q803		MSB709	TRANSISTOR	1	
Q1001		2SD1996	TRANSISTOR	1	
Q2001,02		MSB709	TRANSISTOR	2	
Q3001		MSD602	TRANSISTOR	1	
Q3002		2SB1322	TRANSISTOR	1	
Q3003		MSD601	TRANSISTOR	1	
Q3004		MSC2295	TRANSISTOR	1	
Q3005,06		MSD601	TRANSISTOR	2	
Q3301,02		MSC2295	TRANSISTOR	2	
Q3304,05		MSD601	TRANSISTOR	2	
Q3401,02		MSC2295	TRANSISTOR	2	
Q3403		MSD601	TRANSISTOR	1	
Q3404		MSC2295	TRANSISTOR	1	
Q3405-07		MSD601	TRANSISTOR	3	
Q3408		MSD602	TRANSISTOR	1	
Q3409		MSB710	TRANSISTOR	1	
Q3410-12		MSD601	TRANSISTOR	3	
Q3422		MSD1328	TRANSISTOR	1	
Q3423		MSD601	TRANSISTOR	1	
Q3424		MSB710	TRANSISTOR	1	
Q3425		MSC2295	TRANSISTOR	1	
Q3426,27		MSD601	TRANSISTOR	2	
Q3501		MSD601	TRANSISTOR	1	
Q3502		MSB709	TRANSISTOR	1	
Q3601		MSD601	TRANSISTOR	1	
Q3602,03		MSC2295	TRANSISTOR	2	
Q3604		MSB709	TRANSISTOR	1	
Q3901,02		2SD1991A	TRANSISTOR	2	
Q3903		MSD1328	TRANSISTOR	1	
Q3904		MSD601	TRANSISTOR	1	
Q3905		MSC2295	TRANSISTOR	1	
Q3906		MSB709	TRANSISTOR	1	
Q3907		MSD601	TRANSISTOR	1	
Q3912		2SD1996	TRANSISTOR	1	
Q3913-15		MSD601	TRANSISTOR	3	
Q3916		MSB710	TRANSISTOR	1	
Q3917		MSD602	TRANSISTOR	1	
Q3918		MSB710	TRANSISTOR	1	
Q4501		2SD655TZ	TRANSISTOR	1	
Q4551		2SB561	TRANSISTOR	1	
Q4552		2SD1819A	TRANSISTOR	1	
Q4601,02		2SD1819A	TRANSISTOR	2	
Q4701		2SD602A-R	TRANSISTOR	1	
Q4702,03		MSD601	TRANSISTOR	2	
Q4704,05		MSB710	TRANSISTOR	2	
Q4706		2SB1378	TRANSISTOR	1	
Q4707		2SD601A	TRANSISTOR	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
Q4708		2SB1378	TRANSISTOR	1	
Q6001		2SD1991A	TRANSISTOR	1	
Q6002		MSB709	TRANSISTOR	1	
Q6003		2SD1915F	TRANSISTOR	1	
Q6004-06		MSD601	TRANSISTOR	3	
Q6008		2SD1991	TRANSISTOR	1	
Q7402		MSD1328-S	TRANSISTOR	1	
Q7901,02		MSD601	TRANSISTOR	2	
Q7903		2SC3931CD	TRANSISTOR	1	
Q7904-07		2SB1219	TRANSISTOR	4	
Q7908,09		2SC3929	TRANSISTOR	2	
Q7910		2SD1820	TRANSISTOR	1	
Q7913		2SB1218-Q	TRANSISTOR	1	
Q7914,15		2SD1979-S	TRANSISTOR	2	
Q7916		2SB1219	TRANSISTOR	1	
QR301		MRN1402	TRANSISTOR-RESISTOR	1	
QR302		MRN1403	TRANSISTOR-RESISTOR	1	
QR303		MRN1404	TRANSISTOR-RESISTOR	1	
QR304		MRN1402	TRANSISTOR-RESISTOR	1	
QR305		MRN2404	TRANSISTOR-RESISTOR	1	
QR306		XN6213	TRANSISTOR-RESISTOR	1	
QR307		MRN1404	TRANSISTOR-RESISTOR	1	
QR308		MRN1407	TRANSISTOR-RESISTOR	1	
QR309		MRN1402	TRANSISTOR-RESISTOR	1	
QR310		MRN1404	TRANSISTOR-RESISTOR	1	
QR311		MRN2404	TRANSISTOR-RESISTOR	1	
QR312		MRN2402	TRANSISTOR-RESISTOR	1	
QR313,14		MRN1404	TRANSISTOR-RESISTOR	2	
QR315		MRN2404	TRANSISTOR-RESISTOR	1	
QR316,17		XN6213	TRANSISTOR-RESISTOR	2	
QR318		MRN1402	TRANSISTOR-RESISTOR	1	
QR319,20		MRN1404	TRANSISTOR-RESISTOR	2	
QR802		MRN1404	TRANSISTOR-RESISTOR	1	
QR803		MRN1403	TRANSISTOR-RESISTOR	1	
QR805		MRN1404	TRANSISTOR-RESISTOR	1	
QR806		XN6213	TRANSISTOR-RESISTOR	1	
QR1001,02		MUN2211	TRANSISTOR-RESISTOR	2	
QR2001		XN1213	TRANSISTOR-TRANSISTOR	1	
QR2002		MUN2113	TRANSISTOR-RESISTOR	1	
QR2501		XN1211	TRANSISTOR-RESISTOR	1	
QR3001,02		MUN2212	TRANSISTOR-RESISTOR	2	
QR3003		MUN2111	TRANSISTOR-RESISTOR	1	
QR3301-04		DTC363EK	TRANSISTOR-RESISTOR	4	
QR3305		UN211D	TRANSISTOR-RESISTOR	1	
QR3306		DTC363EK	TRANSISTOR-RESISTOR	1	
QR3307		MRN1404	TRANSISTOR-RESISTOR	1	
QR3402		MRN2402	TRANSISTOR-RESISTOR	1	
QR3403		MRN1403	TRANSISTOR-RESISTOR	1	
QR3404		XN4212	TRANSISTOR-TRANSISTOR	1	
QR3405		MRN1403	TRANSISTOR-RESISTOR	1	
QR3406-08		XN1212	TRANSISTOR-RESISTOR	3	
QR3409,10		MRN1403	TRANSISTOR-RESISTOR	2	
QR3411		MRN1402	TRANSISTOR-RESISTOR	1	
QR3412		MRN1404	TRANSISTOR-RESISTOR	1	
QR3415		XN4212	TRANSISTOR-TRANSISTOR	1	
QR3416		XN1212	TRANSISTOR-RESISTOR	1	
QR3417		XN4212	TRANSISTOR-TRANSISTOR	1	
QR3418		MRN1402	TRANSISTOR-RESISTOR	1	
QR3901-03		MRN1404	TRANSISTOR-RESISTOR	3	
QR3904,05		MRN1402	TRANSISTOR-RESISTOR	2	
QR3906		MRN1404	TRANSISTOR-RESISTOR	1	
QR4001		MUN2212	TRANSISTOR-RESISTOR	1	
QR4002,03		DTC363EK	TRANSISTOR-RESISTOR	2	
QR4004,05		MUN2213	TRANSISTOR-RESISTOR	2	
QR4508,09		UN5113	TRANSISTOR-RESISTOR	2	
QR4510		UN5212	TRANSISTOR-RESISTOR	1	
QR4602		UN5111	TRANSISTOR-RESISTOR	1	
QR4603		UN5213	TRANSISTOR-RESISTOR	1	
QR4701-03		MRN1403	TRANSISTOR-RESISTOR	3	
QR4704		MRN1404	TRANSISTOR-RESISTOR	1	
QR6001		MUN2211	TRANSISTOR-RESISTOR	1	
QR6002,03		MUN2111	TRANSISTOR-RESISTOR	2	
QR6004		MUN2211	TRANSISTOR-RESISTOR	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
QR6009		XN1213	TRANSISTOR-TRANSISTOR	1	
QR6012		MUN2213	TRANSISTOR-RESISTOR	1	
QR6013		MUN2212	TRANSISTOR-RESISTOR	1	
QR6014		MUN2213	TRANSISTOR-RESISTOR	1	
QR6015		MUN2111	TRANSISTOR-RESISTOR	1	
QR7403		MUN2214	TRANSISTOR-RESISTOR	1	
QR7405		MUN2213	TRANSISTOR-RESISTOR	1	
QR7901,02		UN5213	TRANSISTOR-RESISTOR	2	
QR7903		UN5112	TRANSISTOR-RESISTOR	1	
QR7904		UN5214	TRANSISTOR-RESISTOR	1	
QR7905,06		UN5213	TRANSISTOR-RESISTOR	2	
R301		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R303		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R304		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R305,06		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	2	
R307		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R308		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R309		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R310		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R311		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R312		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R313		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R314		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R315		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R316		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R317		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R318		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	1	
R319		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R320		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R321		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R322		ERJ6GMYG123	M.RESISTOR CH 1/10W 12K	1	
R323		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R324		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R325		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R326		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R327		ERJ6GMYG432	M.RESISTOR CH 1/10W 4.3K	1	
R328		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R329		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R330		ERJ6GMYG432	M.RESISTOR CH 1/10W 4.3K	1	
R331		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R332		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R333		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R334		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R335		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R336		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R337		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R338,39		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R340		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R341		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R342		ERJ6GMYJ181	M.RESISTOR CH 1/10W 180	1	
R343		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R344		ERJ6GMYJ911	M.RESISTOR CH 1/10W 910	1	
R345		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R346		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R347		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R348		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R349		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R350		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R351		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R352		ERJ6GMYG183	M.RESISTOR CH 1/10W 18K	1	
R353		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R354		ERJ6GMYG753	M.RESISTOR CH 1/10W 75K	1	
R355		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R356		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R357		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R358		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R359		ERJ6GMYJ181	M.RESISTOR CH 1/10W 180	1	
R360,61		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R362		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R363		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R0702		ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	1	
R0703		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R0704		ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R0705		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R0706,07		ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	2	
R0708		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R0709		ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
R0710		ERJ6GEYJ154	M.RESISTOR CH 1/10W 150K	1	
R0713		ERJ3GEYJ301	M.RESISTOR CH 1/16W 300	1	
R0714		ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1	
R0715		ERJ3GEYJ183	M.RESISTOR CH 1/16W 18K	1	
R0716		VRE0040E151	M.RESISTOR CH 1/10W 150	1	
R0717		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R0718		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R0719		ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R0720		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R0722		ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
R0723		ERJ3GEYJ271	M.RESISTOR CH 1/16W 270	1	
R0724		ERJ3GEYJ183	M.RESISTOR CH 1/16W 18K	1	
R0725		ERJ3GEYJ182	M.RESISTOR CH 1/16W 1.8K	1	
R0726		ERJ3GEYG431	M.RESISTOR CH 1/16W 430	1	
R0727		ERJ3GEYG182	M.RESISTOR CH 1/16W 1.8K	1	
R0728		ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R0729		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R0732		ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R0783		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	1	
R802		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R803		ERJ6GMYJ242	M.RESISTOR CH 1/10W 2.4K	1	
R804,05		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R809		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R810,11		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R814		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R815		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R816		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R817		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R818		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R820		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R821,22		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R824		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R825		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R826		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	1	
R827		ERJ6GMYJ154	M.RESISTOR CH 1/10W 150K	1	
R828		ERJ6GMYJ204	M.RESISTOR CH 1/10W 200K	1	
R829		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R830		ERJ6GMYJ154	M.RESISTOR CH 1/10W 150K	1	
R831		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	1	
R832		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R833		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R834		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R835,36		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	2	
R837		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R838,39		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	2	
R840		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R841		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R842,43		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	2	
R844		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R845		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R846		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R847		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R848		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R849		ERJ6GMYK395	M.RESISTOR CH 1/10W 3.9M	1	
R850		ERJ6GMYJ302	M.RESISTOR CH 1/10W 3K	1	
R851,52		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R853		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R1001		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R1002		ERDS1TJ822	C.RESISTOR 1/2W 8.2K	1	
R2004		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R2005		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R2011		ERJ6GMYG222	M.RESISTOR CH 1/10W 2.2K	1	
R2012		ERJ6GMYG392	M.RESISTOR CH 1/10W 3.9K	1	
R2013,14		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	2	
R2015		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R2016		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R2018		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R2019		ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R2501		ERX1SJ1R8	M.RESISTOR 1W 1.8	1	
R2502		ERJ6GMYG112	M.REISITOR CH 1/10W 1.1K	1	
R2503		ERJ6GMYG102	M.RESISTOR CH 1/10W 1K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R2504		ERJ6GMYG332	M.RESISTOR CH 1/10W 3.3K	1	
R2505		VRE0034E103	M.RESISTOR CH 1/10W 10K	1	
R2506		ERJ6GMYJ564	M.RESISTOR CH 1/10W 560K	1	
R2507		VRE0034E103	M.RESISTOR CH 1/10W 10K	1	
R2508		VRE0034E512	M.RESISTOR CH 1/10W 5.1K	1	
R2509		VRE0034E472	M.RESISTOR CH 1/10W 4.7K	1	
R2510		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R2511		ERJ6GMYJ684	M.RESISTOR CH 1/10W 680K	1	
R2513		ERJ6GMYG133	M.RESISTOR CH 1/10W 13K	1	
R2514		ERJ6GMYG821	M.RESISTOR CH 1/10W 820	1	
R2515		ERG12SJ561	M.RESISTOR 1/2W 560	1	
R2516		ERJ6GMYG473	M.RESISTOR CH 1/10W 47K	1	
R2517		ERX12SJR47	M.RESISTOR 1/2W 0.47	1	
R2518		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R2519		ERJ6GMYG432	M.RESISTOR CH 1/10W 4.3K	1	
R2520		ERJ6GMYG103	M.RESISTOR CH 1/10W 10K	1	
R2521-23		ERDS2TJ560	C.RESISTOR 1/4W 56	3	
R2524		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R2525		EROS2CKG6800	M.RESISTOR 1/4W 680	1	
R2526		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R2527		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R2528		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R2529		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R2530		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R2531,32		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	2	
R2533		ERJ6GMYJ393	M.RESISTOR CH 1/10W 39K	1	
R2534		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R2535		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R2536		ERJ6GMYJ824	M.RESISTOR CH 1/10W 820K	1	
R2537		ERJ6GMYJ393	M.RESISTOR CH 1/10W 39K	1	
R2538		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R2539		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	1	
R2540		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R2541		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R3001,02		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	2	
R3003		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R3004		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	1	
R3005		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3006,07		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R3008		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3009		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3010		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3011		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3012		ERJ6GMYG911	M.RESISTOR CH 1/10W 910	1	
R3013		ERJ6GMYG102	M.RESISTOR CH 1/10W 1K	1	
R3014		ERJ6GMYG471	M.RESISTOR CH 1/10W 470	1	
R3015		ERJ6GMYG102	M.RESISTOR CH 1/10W 1K	1	
R3016		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3017		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3018		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R3019		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R3021		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3022		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R3023		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R3024		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	1	
R3025		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R3026,27		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R3301		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3302		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R3303		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3304		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R3305		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3306		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R3307		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3308		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3310		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3322		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R3323		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R3324		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3325,26		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R3327		ERJ6GMYJ821	M.RESISTOR CH 1/10W 820	1	
R3328		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3333		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3334		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R3335		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R3336,37		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	2	
R3338		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3339		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3340		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3341		ERJ6GMYJ563	M.RESISTOR CH 1/10W 56K	1	
R3342		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R3345,46		ERJ6GMYJ821	M.RESISTOR CH 1/10W 820	2	
R3347		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R3352		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3353		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R3401		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3402		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R3403		ERJ6GMYG361	M.RESISTOR CH 1/10W 360	1	
R3404		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3405		ERJ6GMYG123	M.RESISTOR CH 1/10W 12K	1	
R3406		ERJ6GMYG512	M.RESISTOR CH 1/10W 5.1K	1	
R3407		ERJ6GMYG272	M.RESISTOR CH 1/10W 2.7K	1	
R3408		ERJ6GMYG302	M.RESISTOR CH 1/10W 3K	1	
R3409		ERJ6GMYG821	M.RESISTOR CH 1/10W 820	1	
R3410		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3411-13		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	3	
R3415		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3417		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3422		ERJ6GMYG333	M.RESISTOR CH 1/10W 33K	1	
R3423		ERJ6GMYG683	M.RESISTOR CH 1/10W 68K	1	
R3424		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3425		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R3426		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R3427		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3428		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R3429		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3430		ERJ6GMYJ823	M.RESISTOR CH 1/10W 82K	1	
R3431		ERJ6GMYG821	M.RESISTOR CH 1/10W 820	1	
R3433		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3434		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3435		ERJ6GMYG302	M.RESISTOR CH 1/10W 3K	1	
R3436		ERJ6GMYG272	M.RESISTOR CH 1/10W 2.7K	1	
R3437		ERJ6GMYG512	M.RESISTOR CH 1/10W 5.1K	1	
R3438		ERJ6GMYG123	M.RESISTOR CH 1/10W 12K	1	
R3441		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R3442		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3443		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R3444,45		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	2	
R3446,47		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R3463		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3464		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3465		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R3466		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3467		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R3468,69		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	2	
R3470		ERJ6GMYG123	M.RESISTOR CH 1/10W 12K	1	
R3471		ERJ6GMYG512	M.RESISTOR CH 1/10W 5.1K	1	
R3472		ERJ6GMYG272	M.RESISTOR CH 1/10W 2.7K	1	
R3473		ERJ6GMYG302	M.RESISTOR CH 1/10W 3K	1	
R3474		ERJ6GMYG821	M.RESISTOR CH 1/10W 820	1	
R3475		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3476		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3477,78		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R3479		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3501		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3502		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R3503		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3504,05		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R3506		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R3507		ERJ6GMYG103	M.RESISTOR CH 1/10W 10K	1	
R3508		ERJ6GMYG332	M.RESISTOR CH 1/10W 3.3K	1	
R3509-11		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	3	
R3513,14		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	2	
R3515		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3516		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3517		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3518		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3519		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3520		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3521		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R3522		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3523		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R3524		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3525		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R3526		ERJ6GMYJ470	M.RESISTOR CH 1/10W 47	1	
R3601		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3602		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3603		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3604		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3605		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R3606		ERJ6GMYJ821	M.RESISTOR CH 1/10W 820	1	
R3607-12		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	6	
R3613		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R3614		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3616		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3901-05		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	5	
R3906		ERDS1TJ750	C.RESISTOR 1/2W 75	1	
R3908,09		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	2	
R3910,11		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	2	
R3913		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R3914		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	1	
R3915		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R3916,17		ERDS2TJ181	C.RESISTOR 1/4W 180	2	
R3926		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3927,28		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R3929		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3930		ERJ6GMYJ112	M.RESISTOR CH 1/10W 1.1K	1	
R3931		ERJ6GMYJ123	M.RESISTOR CH 1/10W 12K	1	
R3932		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R3933		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R3934		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R3935		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3936		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R3938		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3945		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R3946		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R3950,51		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	2	
R3953		ERDS2TJ562	C.RESISTOR 1/4W 5.6K	1	
R3954		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R3955		ERJ6GMYJ123	M.RESISTOR CH 1/10W 12K	1	
R3956		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R3957-60		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	4	
R3961		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	1	
R3962		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3963		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3964		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R3965		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3966		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3967		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3968		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4001,02		ERDS2TJ680	C.RESISTOR 1/4W 68	2	
R4003-08		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	6	
R4009		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R4010		ERJ6GMYG433	M.RESISTOR CH 1/10W 43K	1	
R4011		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R4012		ERJ6GMYJ242	M.RESISTOR CH 1/10W 2.4K	1	
R4013		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R4014		ERJ6GMYG100	M.RESISTOR CH 1/10W 10	1	
R4015		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R4020		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R4021		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R4022		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R4028		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R4029,30		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R4033		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R4034		ERJ6GMYG393	M.RESISTOR CH 1/10W 39K	1	
R4035		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R4036		ERJ6GMYG393	M.RESISTOR CH 1/10W 39K	1	
R4501,02		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R4503		ERJ3GEYG223	M.RESISTOR CH 1/16W 22K	1	
R4504,05		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	2	
R4506,07		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	2	
R4508		ERJ3GEYG224	M.RESISTOR CH 1/16W 220K	1	
R4509		ERJ3GEYJ622	M.RESISTOR CH 1/16W 6.2K	1	
R4511		ERJ3GEYG273	M.RESISTOR CH 1/16W 27K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R4512		VRE0071E163	M.RESISTOR CH 1/10W 16K	1	
R4513		ERJ3GEYG103	M.RESISTOR CH 1/16W 10K	1	
R4514,15		ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	2	
R4518,19		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R4522		ERJ3GEYJ225	M.RESISTOR CH 1/16W 2.2M	1	
R4527		VRE0071E333	M.RESISTOR 33K	1	
R4528		VRE0071E153	M.RESISTOR 15K	1	
R4529		ERJ3GEYG562	M.RESISTOR CH 1/16W 5.6K	1	
R4530		ERJ3GEYJ334	M.RESISTOR CH 1/16W 330K	1	
R4534		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R4535		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R4539		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R4541		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R4542		ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
R4543		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R4551,52		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	2	
R4553,54		ERJ3GEYJ273	M.RESISTOR CH 1/16W 27K	2	
R4558		ERJ3GEYG224	M.RESISTOR CH 1/16W 220K	1	
R4561		ERJ3GEYG273	M.RESISTOR CH 1/16W 27K	1	
R4562		VRE0034E10C	M.RESISTOR CH 1/10W	1	
R4563		ERJ3GEYG272	M.RESISTOR CH 1/16W 2.7K	1	
R4568,69		ERJ3GEYJ273	M.RESISTOR CH 1/16W 27K	2	
R4573		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R4577		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R4578		VRE0071E473	M.RESISTOR CH 1/10W 47K	1	
R4581		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R4583		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R4584		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R4585		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R4586		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R4587,88		ERJ3GEYJ273	M.RESISTOR CH 1/16W 27K	2	
R4591		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R4592		ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1	
R4593		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R4594		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R4596		ERJ3GEYG103	M.RESISTOR CH 1/16W 10K	1	
R4597		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R4598,99		ERJ3GEYG223	M.RESISTOR CH 1/16W 22K	2	
R4603		ERJ3GEYG183	M.RESISTOR CH 1/16W 18K	1	
R4606		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R4610		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R4611		ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
R4612		ERJ3GEYJ331	M.RESISTOR CH 1/16W 330	1	
R4613		ERJ3GEYJ394	M.RESISTOR CH 1/16W 390K	1	
R4615		ERJ3GEYJ133	M.RESISTOR CH 1/16W 13K	1	
R4616		ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
R4638		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R4649		ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1	
R4651		ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
R4652		ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
R4653		ERJ3GEYJ221	M.RESISTOR CH 1/16W 220	1	
R4654		ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
R4655		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R4656		ERJ3GEYG243	M.RESISTOR CH 1/16W 24K	1	
R4657		ERJ3GEYJ392	M.RESISTOR CH 1/16W 3.9K	1	
R4666		ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R4671		ERJ3GEYG103	M.RESISTOR CH 1/16W 10K	1	
R4701		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	1	
R4702		ERJ6GMYJ821	M.RESISTOR CH 1/10W 820	1	
R4703		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R4704,05		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	2	
R4706		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R4707		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R4708		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4709		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R4710		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4711		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R4712		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R4713		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4714		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R4715		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R4716		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4717		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R4718		ERJ6GMYG753	M.RESISTOR CH 1/10W 75K	1	
R4719		ERJ6GMYG203	M.RESISTOR CH 1/10W 20K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R4720,21		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	2	
R4722		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R4723		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R4724,25		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	2	
R4901,02		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	2	
R4903,04		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	2	
R4905,06		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	2	
R4907,08		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	2	
R4909,10		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R4915-18		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	4	
R4921		ERJ6GMYG163	M.RESISTOR CH 1/10W 16K	1	
R4922,23		ERJ6GMYG433	M.RESISTOR CH 1/10W 43K	2	
R4924		ERJ6GMYG163	M.RESISTOR CH 1/10W 16K	1	
R4925		ERJ6GMYG473	M.RESISTOR CH 1/10W 47K	1	
R4926		ERJ6GMYG223	M.RESISTOR CH 1/10W 22K	1	
R4929		ERJ6GMYG223	M.RESISTOR CH 1/10W 22K	1	
R4930		ERJ6GMYG473	M.RESISTOR CH 1/10W 47K	1	
R6001		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6002,03		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	2	
R6004		ER0S2CKG2000	M.RESISTOR 1/4W 200	1	
R6005		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R6006		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6007-09		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	3	
R6010,11		ERJ6GMYG223	M.RESISTOR CH 1/10W 22K	2	
R6012		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6013		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6015,16		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6017		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6018		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6019		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6020,21		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6022-24		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	3	
R6025		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R6027		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R6028		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R6029		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R6030		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R6031		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R6032,33		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	2	
R6034		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6035		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R6036		ERJ6GMYJ123	M.RESISTOR CH 1/10W 12K	1	
R6037,38		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R6039,40		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	2	
R6041		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	1	
R6042		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R6044-49		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	6	
R6050		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6051		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R6052		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R6053		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R6054		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R6055		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R6056,57		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	2	
R6058,59		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6060		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6061,62		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	2	
R6063		ERJ6GMYJ224	M.RESISTOR CH 1/10W 220K	1	
R6064		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R6066		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6067		ERJ6GMYJ181	M.RESISTOR CH 1/10W 180	1	
R6068-70		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	3	
R6071		ERDS2TJ391	C.RESISTOR 1/4W 390	1	
R6074		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R6075		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6076		ERJ6GMYJ563	M.RESISTOR CH 1/10W 56K	1	
R6077		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6078		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6079		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6081		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R6082		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6083-86		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	4	
R6087,88		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	2	
R6089,90		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6091		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R6092,93		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	2	
R6094		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6096		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R6097,98		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6099		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R6100		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6101		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6102,03		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	2	
R6104		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R6106,07		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R6108		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6109		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R6110		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6112		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6113		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R6115		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6117		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6119,20		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6122		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6123		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R6124		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6125		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R7403		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R7407,08		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R7410-12		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	3	
R7413		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R7414-19		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	6	
R7420		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R7421-23		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	3	
R7425		ERJ6GMYJ154	M.RESISTOR CH 1/10W 150K	1	
R7426		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R7427		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R7428		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	1	
R7429		ERJ6GMYJ151	M.RESISTOR CH 1/10W 150	1	
R7430		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R7431-34		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	4	
R7435		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R7436		ERG1SJ222	M.RESISTOR 1W 2.2K	1	
R7437,38		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	2	
R7439		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R7440,41		ERJ6GMYJ151	M.RESISTOR CH 1/10W 150	2	
R7901		ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R7902		ERJ3GEYJ821	M.RESISTOR CH 1/16W 820	1	
R7903		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R7904		ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R7905		ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R7906		ERJ6GEYJ150	M.RESISTOR CH 1/10W 15	1	
R7907		ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R7908		ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R7909-11		ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	3	
R7913-15		ERJ3GEYJ682	M.RESISTOR CH 1/16W 6.8K	3	
R7917		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R7918-21		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	4	
R7922		ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1	
R7923		ERJ3GEYJ394	M.RESISTOR CH 1/16W 390K	1	
R7924-26		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	3	
R7927		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R7928		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R7929		ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1	
R7930		ERJ3GEYJ394	M.RESISTOR CH 1/16W 390K	1	
R7931-33		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	3	
R7934		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R7935		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R7936		ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
R7937		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	1	
R7938		ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
R7939		ERJ3GEYJ224	M.RESISTOR CH 1/16W 220K	1	
R7940		ERJ3GEYJ181	M.RESISTOR CH 1/16W 180	1	
R7941		ERJ3GEYJ681	M.RESISTOR CH 1/16W 680	1	
R7942		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	1	
R7943		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R7944		ERJ3GEYJ392	M.RESISTOR CH 1/16W 3.9K	1	
R7945		ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	1	
R7946,47		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	2	
R7948		ERJ3GEYJ182	M.RESISTOR CH 1/16W 1.8K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R7949		ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	1	
R7950		ERJ3GEYJ182	M.RESISTOR CH 1/16W 1.8K	1	
R7951		ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	1	
R7956		ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	1	
R7957		ERJ3GEYJ182	M.RESISTOR CH 1/16W 1.8K	1	
R7958,59		ERJ3GEYJ823	M.RESISTOR CH 1/16W 82K	2	
R7960,61		ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	2	
R7962,63		ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	2	
R7964		ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	1	
R7969-72		ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	4	
R7973-77		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	5	
R7978		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R7979		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R7980		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R7981,82		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	2	
R7983		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R7985		ERJ3GEYJ820	M.RESISTOR CH 1/16W 82	1	
R7987		ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1	
R7988		ERJ3GEYJ121	M.RESISTOR CH 1/16W 120	1	
R7989		ERDS2TJ823	C.RESISTOR 1/4W 82K	1	
RX3401		EXBF8E102J	COMBI. R-R	1	
SW3901		VSS0385	SWITCH	1	
T0703		EQV5EC071A	TRANSFORMER	1	
T0704		EQV5EC072A	TRANSFORMER	1	
T0711		EQS5EC032A	TRANSFORMER	1	
T4701		VLT0695	TRANSFORMER	1	
T4702		VLT0696	TRANSFORMER	1	
VR301		EVN49CA00B23	V.RESISTOR 2K	1	
VR302		EVN49CA00B13	V.RESISTOR	1	
VR303		EVNCBAA00B13	V.RESISTOR	1	
VR304		EVN49CA00B13	V.RESISTOR	1	
VR0701		EVNCBAA00B24	V.RESISTOR	1	
VR801,02		EVMEASA00B13	V.RESISTOR	2	
VR803		EVMEASA00B14	V.RESISTOR	1	
VR804		EVN49CA00B53	V.RESISTOR	1	
VR2001-05		EVNCYAA03B54	V.RESISTOR	5	
VR3001-03		EVNCYAA03B23	V.RESISTOR	3	
VR3301		EVMEASA00B24	V.RESISTOR	1	
VR3302		EVN49CA00B54	V.RESISTOR	1	
VR3304,05		EVN49CA00B52	V.RESISTOR 500	2	
VR3307		EVN49CA00B54	V.RESISTOR	1	
VR3901		EVMEASA00B24	V.RESISTOR	1	
VR4002		EVNCYAA03B25	V.RESISTOR	1	
VR4501		EVMECSA00B53	V.RESISTOR	1	
VR4502		EVMEASA00BY4	V.RESISTOR	1	
VR4507		EVMEASA00BY4	V.RESISTOR	1	
VR4509		EVMECSA00BY3	V.RESISTOR	1	
VR4512		EVNCBAA00B52	V.RESISTOR	1	
VR4550		EVMECSA00B14	V.RESISTOR	1	
VR4551,52		EVMEASA00B55	V.RESISTOR	2	
VR7901,02		EVNCBAA00B14	V.RESISTOR	2	
VR7903		EVTEASA00B55	V.RESISTOR	1	
X0701		VLF1180	CRYSTAL OSCILLATOR	1	
X0702		EFCS6R0MS5	CRYSTAL OSCILLATOR	1	
X0703		EFCS6M65MW3	CRYSTAL OSCILLATOR	1	
X0704		VLF1174	CRYSTAL OSCILLATOR	1	
X801		VSX0406	CRYSTAL OSCILLATOR	1	
X3302		EF0GC3584A5	CRYSTAL OSCILLATOR	1	
X3501		VSX0574	CRYSTAL OSCILLATOR	1	
X6001		VSX0583	CRYSTAL OSCILLATOR	1	
X6002		EF0EC7374T4E	CRYSTAL OSCILLATOR	1	
X7001		VSQ0565	CRYSTAL OSCILLATOR	1	
X7401		VSX0561	CRYSTAL OSCILLATOR	1	
X7901		VSX0513	CRYSTAL OSCILLATOR	1	
X7902		VSX0512	CRYSTAL OSCILLATOR	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
X7903		EFCA6004BF	CRYSTAL OSCILLATOR	1	
			MISCELLANEOUS		
		VEE9564	EARTH WIRE	1	(TV DEMODU-POWER
					SHIELD CASE)
		VJH0827	RF ANT TERMINAL PLATE	1	
		ENG47211G	TUNER	1	<!>
		VEE8682	WIRE CABLE	1	(P1001-P1102)
		VEE8683	WIRE CABLE	1	(P1002-P1103)
		VEE8688	WIRE CABLE	1	(P2001-P2902)
		VEE9001	WIRE CABLE	1	(POWER TR.-P2003)
		VEE8685	WIRE CABLE	1	(P4002-P6502)
		VEE8686	WIRE CABLE	1	(P6003-P7504)
		VEE8837	WIRE CABLE	1	(P3002-P7503)
		VEE9669	WIRE CABLE	1	(P4003-P1509)
		VWJ0775	FLAT CARD CABLE	1	(P2004-P1507)
		VWJ0776	FLAT CARD CABLE	1	(P3001-P501)
		VWJ0778	FLAT CARD CABLE	1	(P7401-P7501)
		VMJ0801	FLAT CARD CABLE	1	(P7402-P7502)
		VMA6768	EARTH ANGLE	1	
		VJF1031	CLAMPER	1	
		VMX2233	SPACER	1	FOR SUB Y/C C.B.A.
		VEJ1465	JACK BOARD	1	FOR I/O PACK C.B.A.
		XTV3+8GFZ	SCREW	4	FOR I/O PACK C.B.A.
		VSC3553	SHIELD COVER (MAIN)	1	FOR NICAM C.B.A.
		VSC3554	SHIELD COVER (TOP)	1	FOR NICAM C.B.A.
		VSC3555	SHIELD COVER (BOTTOM)	1	FOR NICAM C.B.A.
		VMP4471	TV DEMODULATOR ANGLE	1	FOR TV DEMODU. C.B.A.
	■	VEP05176L	HEAD AMP C.B.A.		(RTL)
C503		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
C505-08		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	4	
C509		ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	
C510,11		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C512		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C513		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C514		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C515,16		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C517,18		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C519,20		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C521		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C523		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C524		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C525		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C526		VCEA0JAC221	E.CAPACITOR 6.3V 220U	1	
C527		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C531		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C532		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C533,34		ECUM1H121JCN	C.CAPACITOR CH 50V 120P	2	
C535		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C536		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C537		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C538,39		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	2	
C540		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C551		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C552-54		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C555		ECEA0JPK221	E.CAPACTIOR 6.3V 220U	1	
C556,57		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C559		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
C560,61		ECUM1H471JCN	C.CAPACITOR CH 50V 470P	2	
C562,63		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
C564		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
C565		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C566		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C567		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C569		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
IC501		AN3336SB	IC	1	
IC502		AN3370K	IC	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
IC551		BA7743FS	IC	1	
K501		VLP0145	COIL	1	
K502		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K503,04		VLP0145	COIL	2	
K505		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K506		VLP0145	COIL	1	
K552		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
L501-03		VLQ0540K330	COIL 33UH	3	
L504		VLQ0540J5R6	COIL 5.6UH	1	
L551,52		VLQ0540K330	COIL 33UH	2	
P501		VJS3537B020G	CONNECTOR (FEMALE) 20P	1	
P502		VJS2603	CONNECTOR (FEMALE)	1	
Q501		MSB709	TRANSISTOR	1	
Q502		MSD601	TRANSISTOR	1	
QR501		MRN2404	TRANSISTOR-RESISTOR	1	
R501		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R502		ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R503		ERJ6GMYG752	M.RESISTOR CH 1/10W 7.5K	1	
R504		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R505		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R506		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R507		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R508		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R509-12		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	4	
R513		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R514		ERJ6GMYJ274	M.RESISTOR CH 1/10W 270K	1	
R517		ERJ6GMYJ100	M.RESISTOR CH 1/10W 10	1	
R518,19		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	2	
R520		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R521,22		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	2	
R523		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R524		VRE0034E182	M.RESISTOR CH 1/10W 1.8K	1	
R525		VRE0034E103	M.RESISTOR CH 1/10W 10K	1	
R526		ERJ6GMYG133	M.RESISTOR CH 1/10W 13K	1	
R551		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R552		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R553		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R554		ERJ6GMYJ243	M.RESISTOR CH 1/10W 24K	1	
R556		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R557		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R558		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R559,60		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	2	
R561		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R562		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R563		VRE0034E100	M.RESISTOR CH 1/10W 10	1	
R564		ERJ6GMYJ224	M.RESISTOR CH 1/10W 220K	1	
R565		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R566		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R567		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	1	
R568		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R569		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R570		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
			MISCELLANEOUS		
		VSC3714	SHIELD COVER (TOP)	1	
		VSC3478	SHIELD COVER (MAIN)	1	
		VSC3715	SHIELD COVER (BOTTOM)	1	
	■	VEP07739Z	TIMER C.B.A.		(RTL)

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C1701		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C1702		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C1703		ECKD2H471KB	C.CAPACITOR 500V 470P	1	
C1704		ECEA1VKA220	E.CAPACITOR 35V 22U	1	
C1705		ECKF1H103ZF	C.CAPACITOR 50V 0.01U	1	
C1706		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7501		ECRHC030E11	TRIMMER 3P	1	
C7502		ECEA0JKS330	E.CAPACITOR 6.3V 33U	1	
C7503		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7504		ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	1	
C7505,06		ECEA1EKS4R7	E.CAPACITOR 25V 4.7U	2	
C7507,08		ECUM1H473ZFN	C.CAPACITOR CH 50V 0.047U	2	
C7509		ECUM1H060DCN	C.CAPACITOR CH 50V 6P	1	
C7510		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C7511		ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
C7512		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7513		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C7514,15		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C7517		ECEA0JKS470	E.CAPACITOR 6.3V 47U	1	
C7518		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7519-30		ECUM1H270JCN	C.CAPACITOR CH 50V 27P	12	
C7531,32		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C7533-36		ECUM1H270JCN	C.CAPACITOR CH 50V 27P	4	
C7537		ECEA1HKA220	E.CAPACITOR 50V 22U	1	
C7538		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7539		ECUM1H561JCN	C.CAPACITOR CH 50V 560P	1	
D1701		MA1270-H	DIODE	1	
D1702		MA185	DIODE	1	
D7501		MA3075	DIODE	1	
D7502-06		MA221	DIODE	5	
D7510		MA221	DIODE	1	
D7512		MA221	DIODE	1	
D7514		MA221	DIODE	1	
D7516-18		MA221	DIODE	3	
D7520-22		MA221	DIODE	3	
D7526		MA221	DIODE	1	
D7534		MA221	DIODE	1	
D7546-53		MA221	DIODE	8	
D7556-60		LN81RCPHL	LED	5	
D7562,63		MA221	DIODE	2	
DP7501		VSL0276	DISPLAY TUBE	1	
IC7501		M37502V4CF	IC	1	
IC7502		PST7026	IC	1	
IC7503		XLJ9021B	IC	1	
IC7504		PST7043	IC	1	
IC7505		BA6810S	IC	1	
K7502		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K7504,05		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	2	
L7501		VLQEL05S101K	COIL 100UH	1	
L7502		VLQ0188J330	COIL 33UH	1	
P7501,02		VJS3537A020G	CONNECTOR (FEMALE) 20P	2	
P7503		VJP3234B010	CONNECTOR (MALE) 10P	1	
P7504		VJP1246T	CONNECTOR (MALE) 6P	1	
P7505,06		VJS2183	CONNECTOR (FEMALE)	2	
PP7501,02		VJP3405A011W	CONNECTOR (MALE) 11P	2	
Q1701		2SD1994A	TRANSISTOR	1	
Q7501,02		MSD601	TRANSISTOR	2	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
QR7501,02		MRN2403	TRANSISTOR-RESISTOR	2	
QR7503		MRN2402	TRANSISTOR-RESISTOR	1	
QR7506		MRN1402	TRANSISTOR-RESISTOR	1	
QR7507		MRN1404	TRANSISTOR-RESISTOR	1	
QR7508-11		MRN2404	TRANSISTOR-RESISTOR	4	
QR7512-14		MRN2403	TRANSISTOR-RESISTOR	3	
R1701		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R1702		ERDS2TJ101	C.RESISTOR 1/4W 100	1	
R1703		ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R7501,02		ERJ6GEYJ820	M.RESISTOR CH 1/10W 82	2	
R7503		ERJ6GEYG223	M.RESISTOR CH 1/10W 22K	1	
R7504		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R7505-07		ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	3	
R7508		ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R7509		ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	1	
R7510		ERJ6GEYK106	M.RESISTOR CH 1/10W 10M	1	
R7511		ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	1	
R7512,13		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R7514-16		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	3	
R7517,18		ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	2	
R7519-22		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	4	
R7525,26		ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	2	
R7527-29		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	3	
R7531-41		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	11	
R7542-56		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	15	
R7557-59		ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	3	
R7561,62		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R7564		ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R7565		ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R7566		ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R7567		ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R7568		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7569		ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R7570		ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R7571		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7572		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R7573		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7574		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
RX7501,02		EXBF6E104J	RESISTOR-RESISTOR	2	
RX7503		EXBF8E104J	COMBI.R-R 100K	1	
SW7501,02		ESD172255	SWITCH	2	
SW7503		ESD172355	SWITCH	1	
SW7504-07		ESD172255	SWITCH	4	
SW7508,09		ESD172355	SWITCH	2	
T1701		ETE13K80AY	TRANSFORMER	1	
VR4004		EVNCBAA00B53	V.RESISTOR	1	
X7501		VSX0506	CRYSTAL OSCILLATOR	1	
X7502		VSX0094	CRYSTAL OSCILLATOR	1	
			MISCELLANEOUS		
		VMD0504	LED HOLDER	5	
		VJF1043	FIP HOLDER	1	
	■	VEP06B45A	VR C.B.A.		(RTL)
C6501,02		ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	2	
C6503,04		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C6505		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C6506		VCEA1HAC3R3	E.CAPACITOR 50V 3.3U	1	
C6507		ECEA1AKA330	E.CAPACITOR 10V 33U	1	
C6508		ECEA1CKA330	E.CAPACITOR 16V 33U	1	
C6509		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6510		ECEA0JK470	E.CAPACITOR 6.3V 47U	1	
C6511-14		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	4	
C6515,16		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
C6518		ECUM1H472KBN	C.CAPACITOR CH 50V 4700P	1	
C6519		ECKF1H472KB	C.CAPACITOR 50V 4700P	1	
IC6501		VCR0172	IC	1	
IR6501		VEK6407	IR RECEIVER UNIT	1	
L6501,02		ELESE471KA	COIL	2	
L6503,04		ELESE221KA	COIL 220UH	2	
L6506,07		ELESE101KA	COIL 100UH	2	
LB6501		VLP0145	COIL	1	
LB6502		VLP0150	INDUCTOR	1	
P6502		VJP1251T	CONNECTOR (MALE) 11P	1	
PS6501,02		VJS3405A011A	CONNECTOR (FEMALE) 11P	2	
R6501		ERJ6GEYG332	M.RESISTOR CH 1/10W 3.3K	1	
R6502		ERJ6GEYG331	M.RESISTOR CH 1/10W 330	1	
R6503,04		ERJ6GEYG271	M.RESISTOR CH 1/10W 270	2	
R6505		ERJ6GEYG332	M.RESISTOR CH 1/10W 3.3K	1	
R6506		ERJ6GEYG331	M.RESISTOR CH 1/10W 330	1	
R6508,09		ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	2	
R6511		ERDS2TYJ470	C.RESISTOR	1	
S6501,02		EVQ11409K	SWITCH	2	
VR6501		EWAKABX15C23	V.RESISTOR	1	
VR6502		EWAKFKX15B24	V.RESISTOR	1	
VR6503		EWANYJX1054J	V.RESISTOR	1	
			MISCELLANEOUS		
		VEJ1429	FRONT JACK	1	
		VYC0599	HIFI REC VR COVER UNIT	1	
		VGU4495	HIFI REC VR KNOB	2	
	■	VEP01558C	POWER C.B.A.		(RTL) <!>
C1103		VCC0021	C.CAPACITOR	1	<!>
C1106		VCC0021	C.CAPACITOR	1	<!>
C1109		VCC0023	C.CAPACITOR	1	<!>
C1110		ECQU2A224MN	P.CAPACITOR 250V 0.22U	1	<!>
C1111		ECQU2A154MNB	P.CAPACITOR 250V 0.15U	1	<!>
C1112		ECEC2GG680	E.CAPACITOR 400V 68U	1	
C1113		ECQE6473KF	P.CAPACITOR 630V 0.047U	1	
C1114		VCK0106K121	C.CAPACITOR	1	
C1115		ECA1VXLV470	E.CAPACITOR 35V 47U	1	
C1116		ECA1CXLV101	E.CAPACITOR 16V 100U	1	
C1117		ECKF1H102KB	C.CAPACITOR 50V 1000P	1	
C1118		ECKF1H271KB	C.CAPACITOR 50V 270P	1	
C1121		ECCD2H101J	C.CAPACITOR 500V 100P	1	
C1123		ECEA1JFE560	E.CAPACITOR 63V 56U	1	
C1124		ECEA1CFE331	E.CAPACITOR 16V 330U	1	
C1125		ECEA1DFZ681	E.CAPACITOR 20V 680U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C1126		ECEA1AFZ681	E.CAPACITOR 10V 680U	1	
C1127		ECEA1JFE470	E.CAPACITOR 63V 47U	1	
C1128		ECEA1CFE121	E.CAPACITOR 16V 120U	1	
C1129		ECEA1DFZ681	E.CAPACITOR 20V 680U	1	
C1130		ECEA1AFZ681	E.CAPACITOR 10V 680U	1	
C1131-34		ECKF1H102ZF	C.CAPACITOR 50V 1000P	4	
C1135,36		ECA1CGE101X	E.CAPACITOR 16V 100U	2	
C1139		ECKF1H103ZF	C.CAPACITOR 50V 0.01U	1	
C1140,41		ECA1CGE101X	E.CAPACITOR 16V 100U	2	
D1102		EM1B	DIODE	1	<!>
D1103		AP01C	DIODE	1	
D1104		MA178	DIODE	1	
D1105		1SS254	DIODE	1	
D1106		MA4200H	DIODE	1	
D1107		MA723VT	DIODE	1	
D1108		10ELS2	DIODE	1	
D1109		MA185	DIODE	1	
D1110		FMLG12SP	DIODE	1	
D1111		FMBG14L	DIODE	1	
D1112		SV03YS	DIODE	1	
D1115-17		EM1B	DIODE	3	<!>
D1118		MA4056-L	DIODE	1	
D1119		1SS254	DIODE	1	
D1120		MA4120H	DIODE	1	
D1121,22		1SS254	DIODE	2	
IC1101		STRM6547LF	IC	1	<!>
IC1103		SI3120C	IC	1	
IC1104		SI-3050CA	DIODE	1	
L1101,02		ELF18D221F	COIL	2	<!>
L1103-09		EXCELSA35	COIL	7	
L1110		VLP0074	COIL	1	
L1111,12		ELESE101KA	COIL 100UH	2	
L1113,14		ELC07B009	COIL	2	
L1115,16		VLP0083	COIL	2	
P1101		VJS2625	AC INLET	1	<!>
P1102		VJP1930T	CONNECTOR (MALE)	1	
P1103		VJP1149	CONNECTOR (MALE) 3P	1	
Q1101		PC120FY	TRANSISTOR	1	<!>
Q1102		2SD1996-R	TRANSISTOR	1	
R1101		ERC12AGM334	S.RESISTOR 1/2W 330K	1	
R1102		VRE0087	M.RESISTOR 1/16W	1	
R1103		ERG3SJ823	M.RESISTOR 1/16W 82K	1	
R1104,05		ERDS2FJ224	C.RESISTOR 1/4W 220K	2	
R1106		ERDS2FJ221	C.RESISTOR 1/4W 220	1	
R1109		ERDS2FJ561	C.RESISTOR 1/4W 560	1	
R1110		ERDS2FJ391	C.RESISTOR 1/4W 390	1	
R1111		ERX1SJ1R5	M.RESISTOR 1W 1.5	1	
R1112		ERDS2FJ103	C.RESISTOR 1/4W 10K	1	
R1113		ERDS2FJ682	C.RESISTOR 1/4W 6.8K	1	
R1114		ERDS2FJ101	C.RESISTOR 1/4W 100	1	
R1115		ERDS2TJ271	C.RESISTOR 1/4W 270	1	
R1122		EROS2CKG62R0	M.RESISTOR 1/4W 62	1	
R1123		EROS2CKG3001	M.RESISTOR 1/4W 3K	1	
R1124		EROS2CKG20R0	M.RESISTOR 1/4W 20	1	
R1125		EROS2CKG1201	M.RESISTOR 1/4W 1.2K	1	
R1126		ERDS1TJ562	C.RESISTOR 1/2W 5.6K	1	
R1127		ERDS2FJ224	C.RESISTOR 1/4W 220K	1	
T1101		VLT0718	TRANSFORMER	1	<!>
			MISCELLANEOUS		

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
		VJF0318	FUSE HOLDER	2	<!>
		VMZ2212	CAPACITOR COVER	3	<!>
	■	----------	MECHANISM CONNECTION C.B.A.		
D1501		LN59L.VT	LED	1	
IC1501,02		ON1387	PHOTO INTERRUPTER	2	
P1503		VJS3316A002	CONNECTOR (FEMALE) 2P	1	
P1504		VJS3820	CONNECTOR (FEMALE)	1	
P1505		VJS3537B014G	CONNECTOR (FEMALE) 14P	1	
Q1501		PT493F1MN	TRANSISTOR	1	
Q1502		PN205L-NC.VT	PHOTO TRANSISTOR	1	
SW1501		VES0695	S-TAB SW	1	
SW1502		VST0176	S-VHS CASSETTE SW	1	
			MISCELLANEOUS		
		VMD2029	REEL GUIDE	1	
		VMD1926	LED HOLDER	1	D1501
		VMD1927	PHOTO TR. HOLDER	1	Q1502
	■	VEX0235	CYLINDER DRIVE C.B.A.		(RTL)
C2901-03		ECEA1VSN2R2	E.CAPACITOR 35V 2.2U	3	
C2904-06		ECUM1E104KBM	C.CAPACITOR CH 25V 0.1U	3	
C2907		ECUM1E683KBM	C.CAPACITOR CH 25V 0.068U	1	
C2908		ECUM1E473KBM	C.CAPACITOR CH 25V 0.047U	1	
C2910		ECEA1CKS100	E.CAPACITOR 16V 10U	1	
C2912		ECEA0JKS220	E.CAPACITOR 6.3V 22U	1	
IC2901		AN3815K	IC	1	
P2901		VJP2603W	CONNECTOR (MALE) 12P	1	
P2902		VJP1232T	CONNECTOR (MALE) 5P	1	
R2901		ERX12SJR47	M.RESISTOR CH 1/2W 0.47	1	
TH2901		VRH0017	THERMISTOR	1	
			MISCELLANEOUS		
		VMA9138	MAIN HOLDER	1	
	■	----------	MOTOR C.B.A.		
			MISCELLANEOUS		
		VJP3316B002	CONNECTOR (FEMALE) 2P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks

27-5. ELECTRICAL REPLACEMENT PARTS FOR NV-HS800ECC

Note:1.Be sure to make your orders of replacement parts according to this list.
2.IMPORTANT SAFETY NOTICE : Components identified with the mark <!> have the special characteristics for safety. When replacing any of these components,use only the same type.
3.Unless otherwise specified,
All resistors are in OHMS , K=1,000 OHMS. All capacitors are in MICRO-FARADS(uf),P=uuF.
4.The P.C.Board units marked width'■'show below the main assembled parts.
5.The marking(RTL) indicates the retention time is limited for this item. After the discontinuation of this assembly in production, it will no longer be available.

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
		VEP03C01U	MAIN C.B.A.	1	(RTL)
					NV-HS800ECC
					INCLUDING THE
					CAP DRIVE C.B.A.
					(VEP02412B),
					LUMINANCE &
					CHROMINANCE PACK
					C.B.A.(VEP03A61D),
					SUB LUMINANCE &
					CHROMINANCE PACK
					C.B.A.(VEP03A62B),
					REC/RF AMP PACK
					C.B.A. (VEP03A90A),
					INPUT/OUTPUT PACK
					C.B.A.(VEP03A72E),
					SUB AUDIO PACK
					C.B.A.(VEP04417B),
					Hi-Fi AUDIO PACK
					C.B.A.(VEP04447PS),
					DECODER PACK C.B.A.
					(VEP07671A),
					NICAM DECODER PACK
					C.B.A.(VEP07675D),
					TV DEMODULATOR PACK
					C.B.A.(VEP07801B).
		VEP02412B	CAP DRIVE C.B.A.	1	(RTL)
					INCLUDED IN MAIN
					MAIN C.B.A.
					(VEP03C01U).
		VEP03A61D	LUMINANCE & CHROMINANCE	1	(RTL)
			PACK C.B.A.		INCLUDED IN MAIN
					C.B.A.(VEP03C01U).
		VEP03A62B	SUB LUMINANCE & CHROMINANCE	1	(RTL)
			PACK C.B.A.		INCLUDED IN MAIN
					C.B.A.(VEP03C01U).
					INCLUDING THE
					REC/RF AMP PACK
					C.B.A. (VEP03A90A).
		VEP03A90A	REC/RF AMP PACK C.B.A.	1	(RTL)
					INCLUDED IN MAIN
					SUB LUMINANCE &
					CHROMINANCE
					PACK C.B.A.
					(VEP03A62B)
		VEP03A72E	INPUT/OUTPUT PACK C.B.A.	1	(RTL)
					INCLUDED IN MAIN
					C.B.A.(VEP03C01U).
		VEP04417B	SUB AUDIO PACK C.B.A.	1	(RTL)
					INCLUDED IN MAIN
					C.B.A.(VEP03C01U).
		VEP04447PS	Hi-Fi AUDIO PACK C.B.A.	1	(RTL)
					INCLUDED IN MAIN
					C.B.A.(VEP03C01U).
		VEP07671A	DECODER PACK C.B.A.	1	(RTL)
					INCLUDED IN MAIN
					C.B.A.(VEP03C01U).

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
		VEP07675D	NICAM DECODER PACK C.B.A.	1	(RTL)
					INCLUDED IN MAIN
					C.B.A.(VEP03C01U).
		VEP07801B	TV DEMODULATOR PACK C.B.A.	1	(RTL)
					INCLUDED IN MAIN
					C.B.A.(VEP03C01U).
		VEP05176L	HEAD AMP C.B.A.	1	(RTL)
		VEP07739AA	TIMER C.B.A.	1	(RTL)
		VEP06B45A	VR C.B.A.	1	(RTL)
		VEP01558C	POWER C.B.A.	1	(RTL)<!>
		----------	MECHANISM CONNECTION C.B.A.	1	
		VEX0235	CYLINDER DRIVE C.B.A.	1	(RTL)
		----------	MOTOR C.B.A.	1	C.B.A. IS INCLUDED
					IN LOADING MOTOR (1
					UNIT (VEM0427).
		ENG47210G	TUNER	1	<!>
F1101		XBA2C16TH15	FUSE	1	<!>
	■	VEP03C01U	MAIN C.B.A.		(RTL)
C301		ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	
C303		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C305		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C306		ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C307		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C308		ECUM1H050CCN	C.CAPACITOR CH 50V 5P	1	
C309		ECUM1H562KBN	C.CAPACITOR CH 50V 5600P	1	
C310		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C311		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C312		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C313		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C314		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C315,16		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C317		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C318		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C319		ECUM1H080DCN	C.CAPACITOR CH 50V 8P	1	
C321,22		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	2	
C324		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C325,26		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C329		ECQV1H334JM	P.CAPACITOR 50V 0.33U	1	
C331		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C332,33		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C334		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C335		ECEA0JKA220	E.CAPACITOR 6.3V 220U	1	
C336		ECEA1EKN4R7	E.CAPACITOR 25V 4.7U	1	
C337		ECEA1HKN010	E.CAPACITOR 50V 1U	1	
C338		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C339		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C340		ECEA0JKA220	E.CAPACITOR 6.3V 22U	1	
C341		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C342		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C343		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C344		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C345,46		ECEA1CKA100	E.CAPACITOR 16V 10U	2	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C348		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C349		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C350		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C351		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C0701,02		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	2	
C0704		ECUX1H331JCV	C.CAPACITOR CH 50V 330P	1	
C0706		ECEA1HKA0R1	E.CAPACITOR 50V 0.1U	1	
C0707,08		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	2	
C0709		ECUX1H120JCV	C.CAPACITOR CH 50V 12P	1	
C0710		ECUX1H470JPV	C.CAPACITOR CH 50V 47P	1	
C0711		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C0712		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C0714		ECQB1H473JF	P.CAPACITOR 50V 0.047U	1	
C0715		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C0716		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C0717		ECUX1H270JPV	C.CAPACITOR CH 50V 27P	1	
C0718		ECEA1HKAR47	E.CAPACITOR 50V 0.47U	1	
C0719		ECUX1H270JCV	C.CAPACITOR CH 50V 27P	1	
C0720		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C0723		ECEA1HKA0R1	E.CAPACITOR 50V 0.1U	1	
C0726		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C0730		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C0732		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C802		ECUM1H471JCN	C.CAPACITOR CH 50V 470P	1	
C803		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C804		ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	
C805,06		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C808		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C809		ECEA1HKA4R7	E.CAPACITOR 50V 4.7U	1	
C810		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C811-13		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C814		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C815		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C816		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C817		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C818		ECEA1HKA0R1	E.CAPACITOR 50V 0.1U	1	
C819		ECQB1H332JZ5	F.CAPACITOR 50V 3300P	1	
C820		ECUM1H331JCN	C.CAPACITOR CH 50V 330P	1	
C821-23		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C824		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C825-27		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C828,29		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	2	
C830		ECUM1H471JCN	C.CAPACITOR CH 50V 470P	1	
C831		ECUM1H270JCN	C.CAPACITOR CH 50V 27P	1	
C832		ECQV1H154JM	P.CAPACITOR 50V 0.15U	1	
C833		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C834		ECUM1H151JCN	C.CAPACITOR CH 50V 150P	1	
C835		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C836		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C1002		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C1003		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C2001		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C2003		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C2005		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C2006		ECEA1HKAR47	E.CAPACITOR 50V 0.47U	1	
C2007		ECQV1H683JM	P.CAPACITOR 50V 0.068U	1	
C2009		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C2010		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C2501-04		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	4	
C2505		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C2506		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C2507		ECQV1H683JM	P.CAPACITOR 50V 0.068U	1	
C2508-10		ECEA1HKA2R2	E.CAPACITOR 50V 2.2U	3	
C2511-14		ECUM1E333KBN	C.CAPACITOR CH 25V 0.033U	4	
C2515		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C2516		ECEA1HKAR22	E.CAPACITOR 50V 0.22U	1	
C2517		ECA0JM221	E.CAPACITOR 6.3V 220U	1	
C2518		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C2519,20		ECUM1E333KBN	C.CAPACITOR CH 25V 0.033U	2	
C2521		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C2522		ECEA1HKNR47	E.CAPACITOR 50V 0.47U	1	
C2523		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C2524,25		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	2	
C2526		ECA0JM221	E.CAPACITOR 6.3V 220U	1	
C2527		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C2528		ECEA1HKNR47	E.CAPACITOR 50V 0.47U	1	
C2529		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C2530		ECEA1HKN010	E.CAPACITOR 50V 1U	1	
C2531		ECUM1E224ZFN	C.CAPACITOR CH 25V 0.22U	1	
C2532		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C2533		ECEA0JKA330	E.CAPACOTOR 6.3V 33U	1	
C2534,35		ERJ6GM20R00	M.RESISTOR CH 1/10W 0	2	
C3001		ECUM1H471JCN	C.CAPACITOR CH 50V 470P	1	
C3002		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C3003-06		ECEA1HKA010	E.CAPACITOR 50V 1U	4	
C3007,08		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C3009		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C3010		ECA1AM331	E.CAPACITOR 10V 330U	1	
C3011		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C3012		ECA1AM331	E.CAPACITOR 10V 330U	1	
C3013		ECA0JM331	E.CAPACITOR 6.3V 330U	1	
C3014		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C3015		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3016		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3017-19		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	3	
C3022		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3023,24		ECEA1AKA330	E.CAPACITOR 10V 33U	2	
C3027,28		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	2	
C3029		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3030		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3031		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C3032		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3033		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C3301		ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	
C3302		ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	
C3304-08		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	5	
C3309		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3310		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3312-14		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C3321		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3322		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C3323		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3324		ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C3325		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3326		ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C3327,28		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C3329		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3330		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3336		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3338		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3339		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3340		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C3341		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3342		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C3343		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3344		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C3345		ECUM1H391JCN	C.CAPACITOR CH 50V 390P	1	
C3346		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3347		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C3351,52		ECUM1H181JCN	C.CAPACITOR CH 50V 180P	2	
C3353		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C3354		ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
C3372		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C3401		ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C3402		ECUM1H080DCN	C.CAPACITOR CH 50V 8P	1	
C3403-07		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	5	
C3408,09		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	2	
C3421		ECUM1H472KBN	C.CAPACITOR CH 50V 4700P	1	
C3422		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3423		ECUM1H050CCN	C.CAPACITOR CH 50V 5P	1	
C3424		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C3425		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3426		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3427		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3428		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3429		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3430		ECEA0JKA330	E.CAPACOTOR 6.3V 33U	1	
C3431		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3443		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3444		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C3445		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3447		ECUM1H121JCN	C.CAPACITOR CH 50V 120P	1	
C3448		ECUM1H151JCN	C.CAPACITOR CH 50V 150P	1	
C3449		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C3450,51		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C3452		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3472		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3473		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3474		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3475-77		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C3501		ECA0JM471	E.CAPACITOR 6.3V 470U	1	
C3502		ECRHA030E54R	TRIMMER 3P	1	
C3503		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3504		ECQB1H223JF	P.CAPACITOR 50V 0.022U	1	
C3505		ECEA1HKN010	E.CAPACITOR 50V 1U	1	
C3506		ECQB1H682JZ	F.CAPACITOR 50V 6800P	1	
C3507		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C3508		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C3509		ECUM1H122KBN	C.CAPACITOR CH 50V 1200P	1	
C3510		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3511		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C3512		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3513		ECUM1H080DCN	C.CAPACITOR CH 50V 8P	1	
C3514,15		ECEA1CKA100	E.CAPACITOR 16V 10U	2	
C3516,17		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	2	
C3518		ECEA1HKAR47	E.CAPACITOR 50V 0.47U	1	
C3519		ECUM1H221JCN	C.CAPACITOR CH 50V 220P	1	
C3520		ECEA1CKA330	E.CAPACITOR 16V 33U	1	
C3521		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3522		ECEA1CKA330	E.CAPACITOR 16V 33U	1	
C3523		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3524		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C3525-27		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C3528		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C3529		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3530		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3531		ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C3532		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3533		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C3534		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3601		ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	
C3602		ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
C3603		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3604		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C3605		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3606		ECUM1H681JCN	C.CAPACITOR CH 50V 680P	1	
C3607		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3608		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C3609		ECUM1H271JCN	C.CAPACITOR CH 50V 270P	1	
C3610		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3611		ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	
C3613		ECUM1H181JCN	C.CAPACITOR CH 50V 180P	1	
C3614		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C3901-05		ECEA1CKA100	E.CAPACITOR 16V 10U	5	
C3906		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C3907		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C3908		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3909,10		ECA1AM471	E.CAPACITOR 10V 470U	2	
C3911		ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	
C3912		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C3913		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3914		ECEA1EK3R3	E.CAPACITOR 25V 3.3U	1	
C3915		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C3916		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3917		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C3918		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C3919		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3922		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C3923		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C3924		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C3927		ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C4001,02		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C4003,04		ECEA1CKA100	E.CAPACITOR 16V 10U	2	
C4005		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C4006		ECUM1C224ZFN	C.CAPACITOR CH 16V 0.22U	1	
C4007		ECEA1CPZ101	E.CAPACITOR 16V 100U	1	
C4008		ECUM1C224ZFN	C.CAPACITOR CH 16V 0.22U	1	
C4009		ECEA1CPZ101	E.CAPACITOR 16V 100U	1	
C4010		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C4011,12		ECUM1H122KBN	C.CAPACITOR CH 50V 1200P	2	
C4501		ECQB1H152JZ	F.CAPACITOR 50V 1500P	1	
C4502		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4503		ECUX1H152KBV	C.CAPACITOR CH 50V 1500P	1	
C4504,05		ECEA1CU470	E.CAPACITOR 16V 47U	2	
C4506		ECEA1CU100	E.CAPACITOR 16V 10U	1	
C4507		ECQB1H223JF	P.CAPACITOR 50V 0.022U	1	
C4508		ECEA1EBZ4R7	E.CAPACITOR 25V 4.7U	1	
C4509		ECEA1AU470	E.CAPACITOR 10V 47U	1	
C4510		ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C4511		ECQB1H332JF	P.CAPACITOR 50V 3300P	1	
C4512		ECUX1H561JV	C.CAPACITOR CH 50V 560P	1	
C4513		ECUX1H681JV	C.CAPACITOR CH 50V 680P	1	
C4514		ECUX1H561JV	C.CAPACITOR CH 50V 560P	1	
C4515		ECEA1EU4R7	E.CAPACITOR 25V 4.7U	1	
C4517		ECEA1AU101	E.CAPACITOR 10V 100U	1	
C4518		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4521		ECUM1E473KBN	C.CAPACITOR CH 25V 0.047U	1	
C4522		ECEA1HU3R3	E.CAPACITOR 50V 3.3U	1	
C4528		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4530		ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C4533		ECEA1CU330	E.CAPACITOR 16V 33U	1	
C4537		ECUX1H102JCV	C.CAPACITOR CH 50V 1000P	1	
C4538		ECEA1HUR47	E.CAPACITOR 50V 0.47U	1	
C4539		ECUX1C224ZFV	C.CAPACITOR CH 16V 0.22U	1	
C4541		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4545		ECUX1H102KBV	C.CAPACITOR CH 50V 1000P	1	
C4551		ECQB1H223JF	P.CAPACITOR 50V 0.022U	1	
C4552		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4556		ECEA1CU100	E.CAPACITOR 16V 10U	1	
C4558		ECEA1EBZ4R7	E.CAPACITOR 25V 4.7U	1	
C4559		ECEA1AU470	E.CAPACITOR 10V 47U	1	
C4560		ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C4561		ECQB1H332JF	P.CAPACITOR 50V 3300P	1	
C4562		ECUX1H561JV	C.CAPACITOR CH 50V 560P	1	
C4563		ECUX1H681JV	C.CAPACITOR CH 50V 680P	1	
C4564		ECUX1H561JV	C.CAPACITOR CH 50V 560P	1	
C4565		ECEA1EU4R7	E.CAPACITOR 25V 4.7U	1	
C4567		ECEA1AU101	E.CAPACITOR 10V 100U	1	
C4568		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4572		ECEA1HU3R3	E.CAPACITOR 50V 3.3U	1	
C4576		ECUM1E473KBN	C.CAPACITOR CH 25V 0.047U	1	
C4583		ECEA1CU330	E.CAPACITOR 16V 33U	1	
C4585,86		ECEA1AU101	E.CAPACITOR 10V 100U	2	
C4591		ECUX1C104ZFV	C.CAPACITOR CH 16V 0.1U	1	
C4592		ECUX1H152KBV	C.CAPACITOR CH 50V 1500P	1	
C4593		ECUX1H102JCV	C.CAPACITOR CH 50V 1000P	1	
C4594,95		ECUX1H471JCV	C.CAPACITOR CH 50V 470P	2	
C4596		ECEA1CU100	E.CAPACITOR 16V 10U	1	
C4597		ECUX1H330JCV	C.CAPACITOR CH 50V 33P	1	
C4598		ECUX1H102JCV	C.CAPACITOR CH 50V 1000P	1	
C4604		ECUM1H182JN	C.CAPACITOR CH 50V 1800P	1	
C4606		ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C4611		ECQB1H182JZ	F.CAPACITOR 50V 1800P	1	
C4613		ECUX1H821JCV	C.CAPACITOR CH 50V 820P	1	
C4616		ECUX1H102ZFV	C.CAPACITOR CH 50V 1000P	1	
C4617		ECEA10M22	E.CAPACITOR 10V 22U	1	
C4618		ECQB1H822JZ	F.CAPACITOR 50V 8200P	1	
C4621		ECEA0JU101	E.CAPACITOR 6.3V 100U	1	
C4629		ECQB1H562JZ	P.CAPACITOR 50V 5600P	1	
C4636		ECUX1H471JV	C.CAPACITOR CH 50V 470P	1	
C4638		ECQB1H822JZ	F.CAPACITOR 50V 8200P	1	
C4652,53		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	2	
C4701		ECCD2H181J	C.CAPACITOR 500V 180P	1	
C4702		ECQP1222JZ	P.CAPACITOR 100V 2200P	1	
C4703		ECQB1H102JF	P.CAPACITOR 50V 1000P	1	
C4704		ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C4705		ECEA16M33	E.CAPACITOR 16V 33U	1	
C4706		ECQV1H104JM	P.CAPACITOR 50V 0.1U	1	
C4707		ECQB1H223JF	P.CAPACITOR 50V 0.022U	1	
C4708		ECEA1CKA100	E.CAPACITOR 16V 10U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C4709		ECQB1H472JF	P.CAPACITOR 50V 4700P	1	
C4710		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C4711,12		ECEA1AKA220	E.CAPACITOR 10V 22U	2	
C4713		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C4714		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C4901,02		ECQB1H103JZ	P.CAPACITOR 50V 0.01U	2	
C4903,04		ECQB1H332JZ	F.CAPACITOR 50V 3300P	2	
C4905,06		VCEA1CAD100	E.CAPACITOR 16V 10U	2	
C4907,08		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
C4909,10		ECQB1H103JZ	P.CAPACITOR 50V 0.01U	2	
C4911,12		ECQB1H332JZ	F.CAPACITOR 50V 3300P	2	
C4913,14		VCEA1CAD100	E.CAPACITOR 16V 10U	2	
C4915,16		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
C4917,18		ECQB1H103JZ	P.CAPACITOR 50V 0.01U	2	
C4919,20		ECQB1H332JZ	F.CAPACITOR 50V 3300P	2	
C4923,24		VCEA0JAC101	E.CAPASITOR 6.3V 100U	2	
C6001		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6002		ECEA0JKA330	E.CAPACITOR 6.3V 33U	1	
C6003		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6004		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C6005		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6006		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C6007,08		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	2	
C6010		ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	1	
C6011		ECUM1H472KBN	C.CAPACITOR CH 50V 4700P	1	
C6012		ECUM1H392KBN	C.CAPACITOR CH 50V 3900P	1	
C6013		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C6014		ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C6015		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C6016,17		ECEA1HKN3R3	E.CAPACITOR 50V 3.3U	2	
C6018		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C6019		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6020		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C6021		ECEA16M10	E.CAPACITOR 16V 1U	1	
C6022		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C6023		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C6024		ECEA1HKA4R7	E.CAPACITOR 50V 4.7U	1	
C6025		ECUM1H392KBN	C.CAPACITOR CH 50V 3900P	1	
C6026		ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	1	
C6027		ECUM1E104KBN	C.CAPACITOR CH 25V 0.1U	1	
C6028		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C6029		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C6030		EECS5R5T224N	E.CAPACITOR 5.5V 0.22U	1	
C6034		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6035		ECEA1CKA330	E.CAPACITOR 16V 33U	1	
C6036		ECEA0JKA330	E.CAPACITOR 6.3V 33U	1	
C6037		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6038		ECEA1AKA470	E.CAPACITOR 10V 47U	1	
C6040		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6041		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C6042		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6043		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C6045		ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6046		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6049		ECUM1H271JCN	C.CAPACITOR CH 50V 270P	1	
C6050,51		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	2	
C6053-56		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	4	
C6062		ECUM1H271JCN	C.CAPACITOR CH 50V 270P	1	
C6063		ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C7302		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C7303		ECQV1H393JZ	P.CAPACITOR 50V 0.039U	1	
C7304		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C7305		ECQV1H473JZ	P.CAPACITOR 50V 0.047U	1	
C7306		ECQB1H102KZ	P.CAPACITOR 50V 1000P	1	
C7307		ECQB1H822KZ	P.CAPACITOR 50V 8200P	1	
C7308		ECQB1H102KZ	P.CAPACITOR 50V 1000P	1	
C7309		ECQB1H152JH	P.CAPACITOR 50V 1500P	1	
C7310		ECEA16M10	E.CAPACITOR 16V 1U	1	
C7311		ECEA50MR47	E.CAPACITOR 50V 0.47U	1	
C7312		ECQV1H224JM	P.CAPACITOR 50V 0.22U	1	
C7313		ECQV1H104JM	P.CAPACITOR 50V 0.1U	1	
C7314		ECQV1H224JM	P.CAPACITOR 50V 0.22U	1	
C7315		ECQV1H104JM	P.CAPACITOR 50V 0.1U	1	
C7316		ECQV1H224JM	P.CAPACITOR 50V 0.22U	1	
C7317		ECEA1CK101	E.CAPACITOR 16V 100U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C7318		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7319		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C7320,21		ECEA1CK100	E.CAPACITOR 16V 10U	2	
C7323,24		ECQV1H393JZ	P.CAPACITOR 50V 0.039U	2	
C7331		ECQV1H474JM	P.CAPACITOR 50V 0.47U	1	
C7332,33		ECUM1H102ZFN	C.CAPACITOR CH 50V 1000P	2	
C7334		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7335		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C7336		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7337		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C7339		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7340		ECUM1H390JPN	C.CAPACITOR CH 50V 39P	1	
C7341		ECUM1H070DCN	C.CAPACITOR CH 50V 7P	1	
C7342		ECQV1H823JM	P.CAPACITOR 50V 0.082U	1	
C7343		ECEA1CK100	E.CAPACITOR 16V 10U	1	
C7345		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7346		ECUM1H390JPN	C.CAPACITOR CH 50V 39P	1	
C7347		ECUM1H070DCN	C.CAPACITOR CH 50V 7P	1	
C7348		ECQV1H393JZ	P.CAPACITOR 50V 0.039U	1	
C7349,50		ECUM1H221JCN	C.CAPACITOR CH 50V 220P	2	
C7351,52		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C7353		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C7408		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7409		ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C7410		ECUM1H563ZFN	C.CAPACITOR CH 50V 0.056U	1	
C7411		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7412		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7413		ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C7414		ECUM1H821JCN	C.CAPACITOR CH 50V 820P	1	
C7415		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7416		ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	
C7417		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7418		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C7419		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C7420		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7421		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C7422,23		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C7424		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C7425		ECEA1HKA100	E.CAPACITOR 50V 10U	1	
C7426		ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C7427		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C7428		ECEA1HKA2R2	E.CAPACITOR 50V 2.2U	1	
C7429		ECEA1CSN100	E.CAPACITOR 16V 10U	1	
C7901-03		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	3	
C7904		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C7905		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7906		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C7907		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7908		ECQV1H104JM	P.CAPACITOR 50V 0.1U	1	
C7909		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7910		ECEA1CK100	E.CAPACITOR 16V 10U	1	
C7911-13		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	3	
C7914		ECEA0JK470I	E.CAPACITOR 6.3V 47U	1	
C7915		ECUX1H100DCV	C.CAPACITOR CH 50V 10P	1	
C7916		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7917		ECEA0JK470I	E.CAPACITOR 6.3V 47U	1	
C7918		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7919		ECEA0JK470I	E.CAPACITOR 6.3V 47U	1	
C7920		ECEA1CK100	E.CAPACITOR 16V 10U	1	
C7921		ECQB1H102JH	P.CAPACITOR 50V 1000P	1	
C7922		ECQB1H272JH	P.CAPACITOR 50V 2700P	1	
C7923		ECUX1H151JCV	C.CAPACITOR CH 50V 150P	1	
C7924		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C7925		ECUX1H561JCV	C.CAPACITOR CH 50V 560P	1	
C7926		ECEA1CK100	E.CAPACITOR 16V 10U	1	
C7927		ECQB1H102JH	P.CAPACITOR 50V 1000P	1	
C7928		ECQB1H272JH	P.CAPACITOR 50V 2700P	1	
C7929		ECUX1H151JCV	C.CAPACITOR CH 50V 150P	1	
C7930		ECEA1CKN100	E.CAPACITOR 16V 10U	1	
C7931		ECUX1H561JCV	C.CAPACITOR CH 50V 560P	1	
C7932,33		ECEA1CKN100	E.CAPACITOR 16V 10U	2	
C7934		ECUX1H220JCV	C.CAPACITOR CH 50V 22P	1	
C7935		ECUX1H470JCV	C.CAPACITOR CH 50V 47P	1	
C7937		ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7938		ECEA1HKR47	E.CAPACITOR 50V 0.47U	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C7939,40	ECEA1HKN0R1	E.CAPACITOR 50V 0.1U	2	
C7941	ECEA1HKR47	E.CAPACITOR 50V 0.47U	1	
C7942	ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7943	ECUX1H100DCV	C.CAPACITOR CH 50V 10P	1	
C7945	ECUX1H101JCV	C.CAPACITOR CH 50V 100P	1	
C7946	ECUX1H220JCV	C.CAPACITOR CH 50V 22P	1	
C7947	ECEA1HKR47	E.CAPACITOR 50V 0.47U	1	
C7948	ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7949	ECEA0JK330	E.CAPACITOR 6.3V 33U	1	
C7950-53	ECEA1CKN100	E.CAPACITOR 16V 10U	4	
C7954	ECEA1CK470	E.CAPACITOR 16V 47U	1	
C7955-60	ECEA1CK100	E.CAPACITOR 16V 10U	6	
C7961	ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7963	ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	1	
C7964	ECEA1CK100	E.CAPACITOR 16V 10U	1	
C7965,66	ECUX1H103ZFV	C.CAPACITOR CH 50V 0.01U	2	
C7967	ECEA1CK100	E.CAPACITOR 16V 10U	1	
D301	1SS283	DIODE	1	
D303	MA151WK	DIODE	1	
D305	1SS254	DIODE	1	
D306	MA723VT	DIODE	1	
D307	1SS254	DIODE	1	
D308,09	MA151WK	DIODE	2	
D801-07	1SS254	DIODE	7	
D808	MA151WK	DIODE	1	
D1002	1SS254	DIODE	1	
D2001-05	1SS254	DIODE	5	
D2501-08	1SS254	DIODE	8	
D2510	1SS254	DIODE	1	
D3002	MA28W-A	DIODE	1	
D3003	1SS254	DIODE	1	
D3301	1SS254	DIODE	1	
D3302	MA151K	DIODE	1	
D3304	MA151K	DIODE	1	
D3403	MA723VT	DIODE	1	
D3408	1SS254	DIODE	1	
D3501	1SS254	DIODE	1	
D3502	MA153	DIODE	1	
D3504	MA151WK	DIODE	1	
D3901	1SS254	DIODE	1	
D3902	MA4130L	DIODE	1	
D3903	1SS254	DIODE	1	
D3904	MA151WK	DIODE	1	
D3906	MA151WA	DIODE	1	
D3908,09	1SS254	DIODE	2	
D4003	MA723VT	DIODE	1	
D4004	1SS254	DIODE	1	
D4501-04	MA141K	DIODE	4	
D4601,02	MA141K	DIODE	2	
D4701-03	1SS254	DIODE	3	
D6001	1SS254	DIODE	1	
D6002	MA723VT	DIODE	1	
D6003	1SS254	DIODE	1	
D6005	MA151WK	DIODE	1	
D6006	MA151WA	DIODE	1	
D6007	MA151WK	DIODE	1	
D6008	MA151WA	DIODE	1	
D6009	11EQS04	DIODE	1	
D6011,12	11EQS04	DIODE	2	
D6013	MA723VT	DIODE	1	
D6014	1SS254	DIODE	1	
D6015	MA723VT	DIODE	1	
D7303	MA28WA	DIODE	1	
D7304	MA3100L	DIODE	1	
D7402	MA4300M	DIODE	1	
D7901-03	MA141WK	DIODE	3	
D7904	MA141K	DIODE	1	
D7905	MA141WA	DIODE	1	
D7906	MA141WK	DIODE	1	
D7907	MA141K	DIODE	1	
DL801	EFDUN124A13N	DELAY	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
DL802	EFDVR645A45A	DELAY LINE	1	
DL803	VLD0147	DELAY LINE	1	
FL301	ELB4M022	FILTER	1	
FL302	VLF0639	FILTER	1	
FL801	VLF1079	FILTER	1	
FL3001	ELB4H020	FILTER	1	
FL3601	ELB4R031	FILTER	1	
FL3901	VLF1120	FILTER	1	
FL3902	VLF0765	FILTER	1	
FL7901	VLF0703	FILTER	1	
FL7902	ELKAW103EB	FILTER	1	
FL7904-11	ELKAW103EB	FILTER	8	
FL7912-15	ELKAW101GB	FILTER	4	
FL7916	VLF0633	FILTER	1	
FL7918	ELKAW103EB	FILTER	1	
IC301	VEFH20B	HIC	1	
IC302	MN3859S	IC	1	
IC303	AN1358S	IC	1	
IC0701	LA7576	IC	1	
IC801	VCR0383	IC	1	
IC802	M52352FP	IC	1	
IC2001	AN3727S	IC	1	
IC2002	UPD4053BG	IC	1	
IC2501	BA6219B	IC	1	
IC2502	LM358PS	IC	1	
IC2503	XRA6439S	IC	1	
IC2504	LM358PS	IC	1	
IC2505	LM393P	IC	1	
IC3001	AN3581S	IC	1	
IC3002	M52055FP	IC	1	
IC3301	M52083FP	IC	1	
IC3401	NJM2233BMA	IC	1	
IC3403	MN155202VZAM	IC	1	
IC3404	MN1280S	IC	1	
IC3405	UPD4066BG	IC	1	
IC3501	LC74760	IC	1	
IC3502	M52055FP	IC	1	
IC3503	NJM2246DA	IC	1	
IC3504	NJM2233BMA	IC	1	
IC3601	AN6308S	IC	1	
IC3901	M52475AP	IC	1	
IC3902	AN3916	IC	1	
IC3904	AN1393S	IC	1	
IC4001	NJM4565DD	IC	1	
IC4501	XLH7773AKS	IC	1	
IC4601	BA7755AF	IC	1	
IC4701	AN1358S	IC	1	
IC4702	MN4066BS	IC	1	
IC4901	LA7155M	IC	1	
IC4902	MN4066BS	IC	1	
IC6001	MN6755320H3W	IC	1	
IC6002	M38024V1BH	IC	1	
IC6003	MN1280S	IC	1	
IC6005	UPD4052BG	IC	1	
IC6008	TL431CLP	IC	1	
IC7301	TDA3803A	IC	1	
IC7302	TA8721SN	IC	1	
IC7401	M66006FP	IC	1	
IC7402	LA7217M	IC	1	
IC7901	TB1204F	IC	1	
IC7902	TA2009F	IC	1	
IC7903	M5238FP	IC	1	
J3901,02	VJS1470	21PIN SKIRT JACK	2	
K2	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
K4	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
K6	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
K0702	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
K0704,05		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
K3005,06		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	2	
K3010-12		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	3	
K3908		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K6001		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K6003-05		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	3	
K7404		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K7409,10		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	2	
K7417		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
L302		VLQ0188J180	COIL 18UH	1	
L304		VLQ0188J270	COIL 27UH	1	
L305		VLQ0188J101	COIL 100UH	1	
L306		VLQ0188J390	COIL 39UH	1	
L309-11		VLQ0188J330	COIL 33UH	3	
L312		ELESN121JA	COIL 120UH	1	
L0701,02		ELJNAR10MF	COIL	2	
L0705		VLQ0163J5R6	COIL 5.6UH	1	
L0706		VLQEL05T120	COIL 12UH	1	
L801,02		ELESE681KA	COIL 680UH	2	
L803		ELESN331KA	COIL 330UH	1	
L804		VLQ0407101K	COIL 100UH	1	
L806		VLQ0407101K	COIL 100UH	1	
L807,08		VLQ0188J150	COIL 15UH	2	
L809		VLQ0188J330	COIL 33UH	1	
L810		VLQ0188J150	COIL 15UH	1	
L811		VLQ0188J151	COIL 150UH	1	
L812		VLQ0188J270	COIL 27UH	1	
L813,14		VLQ0188J150	COIL 15UH	2	
L2001		VLQ0569	COIL	1	
L2002		VLQ0556	COIL	1	
L2501		VLP0074	COIL	1	
L2502		ELESE330KA	COIL 33UH	1	
L2503		ELESE102KA	COIL 1000UH	1	
L3001-03		VLQ0188J330	COIL 33UH	3	
L3004		VLQ0398	COIL	1	
L3301		VLQ0188J150	COIL 15UH	1	
L3304		VLQ0188J330	COIL 33UH	1	
L3306		VLQ0188J390	COIL 39UH	1	
L3307		VLQ0188J120	COIL 12UH	1	
L3308		VLQ0188J330	COIL 33UH	1	
L3309		VLQ0188J181	COIL 180UH	1	
L3310		VLQ0188J270	COIL 27UH	1	
L3313		ELESE681KA	COIL 680UH	1	
L3315,16		VLQ0188J5R6	COIL 5.6UH	2	
L3318		VLQ0188J330	COIL 33UH	1	
L3323		VLQ0188J330	COIL 33UH	1	
L3401		VLQ0188J150	COIL 15UH	1	
L3404		VLQ0188J220	COIL 22UH	1	
L3405		VLQ0188J330	COIL 33UH	1	
L3412		VLQ0188J330	COIL 33UH	1	
L3415		VLQ0188J120	COIL 12UH	1	
L3501		VLQ0188J330	COIL 33UH	1	
L3502		VLQ0188J5R6	COIL 5.6UH	1	
L3503		VLQ0188J100	COIL 10UH	1	
L3504		VLQ0188J390	COIL 39UH	1	
L3505		VLQ0188J820	COIL 82UH	1	
L3508		VLQ0188J330	COIL 33UH	1	
L3601		VLQEL05T120	COIL 12UH	1	
L3602,03		VLQEL05S101K	COIL 100UH	2	
L3604		VLQEL05T151J	COIL 150UH	1	
L3605		VLQEL05S820K	COIL 82UH	1	
L3901-04		ELESE101KA	COIL 100UH	4	
L3906		VLQ0188J1R0	COIL 1UH	1	
L4001,02		ELESE101KA	COIL 100UH	2	
L4501,02		ELESE101KA	COIL 100UH	2	
L4601		VLQEL07F153	COIL	1	
L4701		ELESE471KA	COIL	1	
L4702		ELESE101KA	COIL 100UH	1	
L4901,02		ELESE102KA	COIL 1000UH	2	
L4903,04		ELESE101KA	COIL 100UH	2	
L4905,06		ELESE102KA	COIL 1000UH	2	
L4907,08		ELESE101KA	COIL 100UH	2	
L4909,10		ELESE102KA	COIL 1000UH	2	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
L6001		VLP0083	COIL	1	
L6002		ELESE101KA	COIL 100UH	1	
L6003		VLP0083	COIL	1	
L6007,08		VLP0083	COIL	2	
L6009		ELESE101KA	COIL 100UH	1	
L7301		ELESQ102KA	COIL 1000UH	1	
L7407		VLQ0599J1R0	COIL 1UH	1	
L7408-12		VLQ0599J680	COIL 68UH	5	
L7901,02		VLP0083	COIL	2	
P1001		VJP2593	CONNECTOR (MALE)	1	
P1002		VJP1142	CONNECTOR (MALE)	1	
P2001		VJP1232T	CONNECTOR (MALE) 5P	1	
P2003		VJP3502	CONNECTOR (MALE)	1	
P2004		VJS3537A015G	CONNECTOR (FEMALE) 15P	1	
P3001		VJS3537A020G	CONNECTOR (FEMALE) 20P	1	
P3002		VJP3233A010	CONNECTOR (MALE) 10P	1	
P4001		VJS2331	CONNECTOR (FEMALE)	1	
P4002		VJP1238T	CONNECTOR (MALE) 11P	1	
P4003		VJP1230T	CONNECTOR (MALE) 3P	1	
P6001		VJS3537A014G	CONNECTOR (FEMALE) 14P	1	
P6003		VJP1233T	CONNECTOR (MALE) 6P	1	
P7401,02		VJS3537A020G	CONNECTOR (FEMALE) 20P	2	
PK0701		VJR0816A010W	CONNECTOR (MALE) 10P	1	
PK4001-03		VJR0757B018T	CONNECTOR (MALE) 18P	3	
PK7901,02		VJR0477	PACK PIN	2	
PP0701		VJP3589A004B	CONNECTOR (MALE) 4P	1	
PP2001		VJP3042A012W	CONNECTOR (MALE) 12P	1	
PP2002		VJP3042A010W	CONNECTOR (MALE) 10P	1	
PP3001		VJP3042A009W	CONNECTOR (MALE) 9P	1	
PP3002		VJP3042A012W	CONNECTOR (MALE) 12P	1	
PP3003		VJP3042A013W	CONNECTOR (MALE) 13P	1	
PP3011,12		VJP3042A018W	CONNECTOR (MALE) 18P	2	
PP3013		VJP3042A014W	CONNECTOR (MALE) 14P	1	
PP3021-24		VJP3043A012W	CONNECTOR (MALE) 12P	4	
PP3301		VJP3042A011W	CONNECTOR (MALE) 11P	1	
PP4501		VJP3042A017W	CONNECTOR (MALE) 17P	1	
PP7406		VJP3043A010W	CONNECTOR (MALE) 10P	1	
PS301		VJS3042B009W	CONNECTOR (FEMALE) 9P	1	
PS302		VJS3042B012W	CONNECTOR (FEMALE) 12P	1	
PS303		VJS3042B013W	CONNECTOR (FEMALE) 13P	1	
PS2001		VJS3042B012W	CONNECTOR (FEMALE) 12P	1	
PS2002		VJS3042B010W	CONNECTOR (FEMALE) 10P	1	
PS3021-24		VJS3043B012W	CONNECTOR (FEMALE) 12P	4	
PS3302,03		VJS3042B018W	CONNECTOR (FEMALE) 18P	2	
PS3501		VJS3042F014W	CONNECTOR (FEMALE) 14P	1	
PS3601		VJS3042B011W	CONNECTOR (FEMALE) 11P	1	
PS4701		VJS3042B017W	CONNECTOR (FEMALE) 17P	1	
PS7301,02		VJR0477	PACK PIN	2	
Q301		MSC2295	TRANSISTOR	1	
Q302		MSB709	TRANSISTOR	1	
Q303,04		MSC2295	TRANSISTOR	2	
Q305		MSD601	TRANSISTOR	1	
Q306		MSC2295	TRANSISTOR	1	
Q307,08		MSB709	TRANSISTOR	2	
Q0701		MSD601-S	TRANSISTOR	1	
Q0702		MSB709	TRANSISTOR	1	
Q801		2SA1022	TRANSISTOR	1	
Q802		MSC2295	TRANSISTOR	1	
Q803		MSB709	TRANSISTOR	1	
Q1001		2SD1996	TRANSISTOR	1	
Q2001,02		MSB709	TRANSISTOR	2	
Q3001		MSD602	TRANSISTOR	1	
Q3002		2SB1322	TRANSISTOR	1	
Q3003		MSD601	TRANSISTOR	1	
Q3004		MSC2295	TRANSISTOR	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
Q3005,06		MSD601	TRANSISTOR	2	
Q3301,02		MSC2295	TRANSISTOR	2	
Q3304,05		MSD601	TRANSISTOR	2	
Q3401,02		MSC2295	TRANSISTOR	2	
Q3403		MSD601	TRANSISTOR	1	
Q3404		MSC2295	TRANSISTOR	1	
Q3405-07		MSD601	TRANSISTOR	3	
Q3408		MSD602	TRANSISTOR	1	
Q3409		MSB710	TRANSISTOR	1	
Q3410-12		MSD601	TRANSISTOR	3	
Q3422		MSD1328	TRANSISTOR	1	
Q3423		MSD601	TRANSISTOR	1	
Q3424		MSB710	TRANSISTOR	1	
Q3425		MSC2295	TRANSISTOR	1	
Q3426,27		MSD601	TRANSISTOR	2	
Q3501		MSD601	TRANSISTOR	1	
Q3502		MSB709	TRANSISTOR	1	
Q3601		MSD601	TRANSISTOR	1	
Q3602,03		MSC2295	TRANSISTOR	2	
Q3604		MSB709	TRANSISTOR	1	
Q3901,02		2SD1991A	TRANSISTOR	2	
Q3903		MSD1328	TRANSISTOR	1	
Q3904		MSD601	TRANSISTOR	1	
Q3905		MSC2295	TRANSISTOR	1	
Q3906		MSB709	TRANSISTOR	1	
Q3907		MSD601	TRANSISTOR	1	
Q3912		2SD1996	TRANSISTOR	1	
Q3913-15		MSD601	TRANSISTOR	3	
Q3916		MSB710	TRANSISTOR	1	
Q3917		MSD602	TRANSISTOR	1	
Q3918		MSB710	TRANSISTOR	1	
Q4501		2SD655TZ	TRANSISTOR	1	
Q4551		2SB561	TRANSISTOR	1	
Q4552		2SD1819A	TRANSISTOR	1	
Q4601,02		2SD1819A	TRANSISTOR	2	
Q4701		2SD602A-R	TRANSISTOR	1	
Q4702,03		MSD601	TRANSISTOR	2	
Q4704,05		MSB710	TRANSISTOR	2	
Q4706		2SB1378	TRANSISTOR	1	
Q4707		2SD601A	TRANSISTOR	1	
Q4708		2SB1378	TRANSISTOR	1	
Q6001		2SD1991A	TRANSISTOR	1	
Q6002		MSB709	TRANSISTOR	1	
Q6003		2SD1915F	TRANSISTOR	1	
Q6004-06		MSD601	TRANSISTOR	3	
Q6008		2SD1991	TRANSISTOR	1	
Q7301		MSD601-S	TRANSISTOR	1	
Q7304,05		MSD601	TRANSISTOR	2	
Q7306		2SC2404-C	TRANSISTOR	1	
Q7307		2SD1328-S	TRANSISTOR	1	
Q7901,02		MSD601	TRANSISTOR	2	
Q7903		2SC3931CD	TRANSISTOR	1	
Q7904-07		2SB1219	TRANSISTOR	4	
Q7908,09		2SC3929	TRANSISTOR	2	
Q7910,11		2SD1820	TRANSISTOR	2	
Q7912		2SB1219	TRANSISTOR	1	
Q7913		2SB1218-Q	TRANSISTOR	1	
Q7914,15		2SD1979-S	TRANSISTOR	2	
Q7916,17		2SB1219	TRANSISTOR	2	
QR301		MRN1402	TRANSISTOR-RESISTOR	1	
QR302		MRN1403	TRANSISTOR-RESISTOR	1	
QR303		MRN1404	TRANSISTOR-RESISTOR	1	
QR304		MRN1402	TRANSISTOR-RESISTOR	1	
QR305		MRN2404	TRANSISTOR-RESISTOR	1	
QR306		XN6213	TRANSISTOR-RESISTOR	1	
QR307		MRN1404	TRANSISTOR-RESISTOR	1	
QR308		MRN1407	TRANSISTOR-RESISTOR	1	
QR309		MRN1402	TRANSISTOR-RESISTOR	1	
QR310		MRN1404	TRANSISTOR-RESISTOR	1	
QR311		MRN2404	TRANSISTOR-RESISTOR	1	
QR312		MRN2402	TRANSISTOR-RESISTOR	1	
QR313,14		MRN1404	TRANSISTOR-RESISTOR	2	
QR315		MRN2404	TRANSISTOR-RESISTOR	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
QR316,17		XN6213	TRANSISTOR-RESISTOR	2	
QR318		MRN1402	TRANSISTOR-RESISTOR	1	
QR319,20		MRN1404	TRANSISTOR-RESISTOR	2	
QR802		MRN1404	TRANSISTOR-RESISTOR	1	
QR803		MRN1403	TRANSISTOR-RESISTOR	1	
QR805		MRN1404	TRANSISTOR-RESISTOR	1	
QR806		XN6213	TRANSISTOR-RESISTOR	1	
QR1001,02		MUN2211	TRANSISTOR-RESISTOR	2	
QR2001		XN1213	TRANSISTOR-TRANSISTOR	1	
QR2002		MUN2113	TRANSISTOR-RESISTOR	1	
QR2501		XN1211	TRANSISTOR-RESISTOR	1	
QR3001,02		MUN2212	TRANSISTOR-RESISTOR	2	
QR3003		MUN2111	TRANSISTOR-RESISTOR	1	
QR3301-04		DTC363EK	TRANSISTOR-RESISTOR	4	
QR3305		UN211D	TRANSISTOR-RESISTOR	1	
QR3306		DTC363EK	TRANSISTOR-RESISTOR	1	
QR3307		MRN1404	TRANSISTOR-RESISTOR	1	
QR3402		MRN2402	TRANSISTOR-RESISTOR	1	
QR3403		MRN1403	TRANSISTOR-RESISTOR	1	
QR3404		XN4212	TRANSISTOR-TRANSISTOR	1	
QR3405		MRN1403	TRANSISTOR-RESISTOR	1	
QR3406-08		XN1212	TRANSISTOR-RESISTOR	3	
QR3409,10		MRN1403	TRANSISTOR-RESISTOR	2	
QR3411		MRN1402TE85L	TRANSISTOR-RESISTOR	1	
QR3412		MRN1404	TRANSISTOR-RESISTOR	1	
QR3415		XN4212	TRANSISTOR-TRANSISTOR	1	
QR3416		XN1212	TRANSISTOR-RESISTOR	1	
QR3417		XN4212	TRANSISTOR-TRANSISTOR	1	
QR3418		MRN1402	TRANSISTOR-RESISTOR	1	
QR3901-03		MRN1404	TRANSISTOR-RESISTOR	3	
QR3904,05		MRN1402	TRANSISTOR-RESISTOR	2	
QR3906		MRN1404	TRANSISTOR-RESISTOR	1	
QR4001		MUN2212	TRANSISTOR-RESISTOR	1	
QR4002,03		DTC363EK	TRANSISTOR-RESISTOR	2	
QR4004,05		MUN2213	TRANSISTOR-RESISTOR	2	
QR4508,09		UN5113	TRANSISTOR-RESISTOR	2	
QR4510		UN5212	TRANSISTOR-RESISTOR	1	
QR4602		UN5111	TRANSISTOR-RESISTOR	1	
QR4603		UN5213	TRANSISTOR-RESISTOR	1	
QR4701-03		MRN1403	TRANSISTOR-RESISTOR	3	
QR4704		MRN1404	TRANSISTOR-RESISTOR	1	
QR4901		MRN1404	TRANSISTOR-RESISTOR	1	
QR4902		UN211D	TRANSISTOR-RESISTOR	1	
QR6001		MUN2211	TRANSISTOR-RESISTOR	1	
QR6002,03		MUN2111	TRANSISTOR-RESISTOR	2	
QR6004		MUN2211	TRANSISTOR-RESISTOR	1	
QR6009		XN1213	TRANSISTOR-TRANSISTOR	1	
QR6012		MUN2213	TRANSISTOR-RESISTOR	1	
QR6013		MUN2212	TRANSISTOR-RESISTOR	1	
QR6014		MUN2213	TRANSISTOR-RESISTOR	1	
QR6015		MUN2111	TRANSISTOR-RESISTOR	1	
QR7301,02		MRN1404	TRANSISTOR-RESISTOR	2	
QR7312-14		MRN1402	TRANSISTOR-RESISTOR	3	
QR7315,16		MRN1404	TRANSISTOR-RESISTOR	2	
QR7403		MUN2214	TRANSISTOR-RESISTOR	1	
QR7405		MUN2213	TRANSISTOR-RESISTOR	1	
QR7901,02		UN5213	TRANSISTOR-RESISTOR	2	
QR7903		UN5112	TRANSISTOR-RESISTOR	1	
QR7904		UN5214	TRANSISTOR-RESISTOR	1	
QR7905,06		UN5213	TRANSISTOR-RESISTOR	2	
R301		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R303		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R304		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R305		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R306		ERJ6GMZOR00	M.RESISTOR CH 1/10W 0	1	
R307		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R308		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R309		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R310		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R311		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R312		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R313		ERJ6GMYJ361	M.RESISTOR CH 1/10W 360	1	
R314		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R315		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R316		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R317		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R318		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	1	
R319		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R320		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R321		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R322		ERJ6GMYG123	M.RESISTOR CH 1/10W 12K	1	
R323		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R324		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R325		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R326		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R327		ERJ6GMYG432	M.RESISTOR CH 1/10W 4.3K	1	
R328		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R329		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R330		ERJ6GMYG432	M.RESISTOR CH 1/10W 4.3K	1	
R331		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R332		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R333		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R334		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R335		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R336		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R337		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R338,39		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R340		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R341		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R342		ERJ6GMYJ181	M.RESISTOR CH 1/10W 180	1	
R343		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R344		ERJ6GMYJ911	M.RESISTOR CH 1/10W 910	1	
R345		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R346		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R347		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R348		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R349		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R350		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R351		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R352		ERJ6GMYG183	M.RESISTOR CH 1/10W 18K	1	
R353		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R354		ERJ6GMYG753	M.RESISTOR CH 1/10W 75K	1	
R355		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R356		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R357		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R358		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R359		ERJ6GMZOR00	M.RESISTOR CH 1/10W 0	1	
R360,61		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R362		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R363		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R0702		ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	1	
R0704		ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
R0705		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R0706,07		ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	2	
R0708		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R0709		ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
R0710		ERJ6GEYJ154	M.RESISTOR CH 1/10W 150K	1	
R0713		ERJ3GEYJ331	M.RESISTOR CH 1/16W 330	1	
R0714		ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1	
R0715		ERJ3GEYJ183	M.RESISTOR CH 1/16W 18K	1	
R0716		VRE0040E151	M.RESISTOR CH 1/10W 150	1	
R0717		ERJ3GEYOR00	M.RESISTOR CH 1/16W 0	1	
R0718		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R0719		ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R0720		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R0722		ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
R0728		ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R0729		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R0732		ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R0783		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	1	
R802		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R803		ERJ6GMYJ242	M.RESISTOR CH 1/10W 2.4K	1	
R804,05		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R809		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R810,11		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R814		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R815		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R816		ERJ6GMZOR00	M.RESISTOR CH 1/10W 0	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R817		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R818		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R820		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R821,22		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R824		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R825		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R826		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	1	
R827		ERJ6GMYJ154	M.RESISTOR CH 1/10W 150K	1	
R828		ERJ6GMYJ204	M.RESISTOR CH 1/10W 200K	1	
R829		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R830		ERJ6GMYJ154	M.RESISTOR CH 1/10W 150K	1	
R831		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	1	
R832		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R833		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R834		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R835,36		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	2	
R837		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R838,39		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	2	
R840		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R841		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R842,43		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	2	
R844		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R845		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R846		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R847		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R848		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R849		ERJ6GMYK395	M.RESISTOR CH 1/10W 3.9M	1	
R850		ERJ6GMYJ302	M.RESISTOR CH 1/10W 3K	1	
R851,52		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R853		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R1001		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R1002		ERDS1TJ822	C.RESISTOR 1/2W 8.2K	1	
R2004		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R2005		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R2011		ERJ6GMYG222	M.RESISTOR CH 1/10W 2.2K	1	
R2012		ERJ6GMYG392	M.RESISTOR CH 1/10W 3.9K	1	
R2013,14		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	2	
R2015		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R2016		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R2018		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R2019		ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R2501		ERX1SJ1R8	M.RESISTOR 1W 1.8	1	
R2502		ERJ6GMYG112	M.REISITOR CH 1/10W 1.1K	1	
R2503		ERJ6GMYG102	M.RESISTOR CH 1/10W 1K	1	
R2504		ERJ6GMYG332	M.RESISTOR CH 1/10W 3.3K	1	
R2505		VRE0034E103	M.RESISTOR CH 1/10W 10K	1	
R2506		ERJ6GMYJ564	M.RESISTOR CH 1/10W 560K	1	
R2507		VRE0034E103	M.RESISTOR CH 1/10W 10K	1	
R2508		VRE0034E512	M.RESISTOR CH 1/10W 5.1K	1	
R2509		VRE0034E472	M.RESISTOR CH 1/10W 4.7K	1	
R2510		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R2511		ERJ6GMYJ684	M.RESISTOR CH 1/10W 680K	1	
R2513		ERJ6GMYG133	M.RESISTOR CH 1/10W 13K	1	
R2514		ERJ6GMYG821	M.RESISTOR CH 1/10W 820	1	
R2515		ERG12SJ561	M.RESISTOR 1/2W 560	1	
R2516		ERJ6GMYG473	M.RESISTOR CH 1/10W 47K	1	
R2517		ERX12SJR47	M.RESISTOR 1/2W 0.47	1	
R2518		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R2519		ERJ6GMYG432	M.RESISTOR CH 1/10W 4.3K	1	
R2520		ERJ6GMYG103	M.RESISTOR CH 1/10W 10K	1	
R2521-23		ERDS2TJ560	C.RESISTOR 1/4W 56	3	
R2524		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R2525		EROS2CKG6800	M.RESISTOR 1/4W 680	1	
R2526		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R2527		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R2528		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R2529		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R2530		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R2531,32		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	2	
R2533		ERJ6GMYJ393	M.RESISTOR CH 1/10W 39K	1	
R2534		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R2535		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R2536		ERJ6GMYJ824	M.RESISTOR CH 1/10W 820K	1	
R2537		ERJ6GMYJ393	M.RESISTOR CH 1/10W 39K	1	
R2538		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R2539		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	1	
R2540		ERJ6GMYJ105	M.RESISTOR CH 1/10W 1M	1	
R2541		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R3001,02		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	2	
R3003		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R3004		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	1	
R3005		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3006,07		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R3008		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3009		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3010		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3011		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3012		ERJ6GMYG911	M.RESISTOR CH 1/10W 910	1	
R3013		ERJ6GMYG102	M.RESISTOR CH 1/10W 1K	1	
R3014		ERJ6GMYG471	M.RESISTOR CH 1/10W 470	1	
R3015		ERJ6GMYG102	M.RESISTOR CH 1/10W 1K	1	
R3016		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3017		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3018		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R3019		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R3021		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3022		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R3023		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R3024		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	1	
R3025		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R3026,27		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R3301		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3302		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R3303		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3304		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R3305		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3306		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R3307		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3308		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3310		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3322		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R3323		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R3324		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3325,26		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R3327		ERJ6GMYJ821	M.RESISTOR CH 1/10W 820	1	
R3328		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3333		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3334		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R3335		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3336,37		ERJ6GMYJ681	M.RESISTOR CH 1/10W 680	2	
R3338		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3339		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3340		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3341		ERJ6GMYJ563	M.RESISTOR CH 1/10W 56K	1	
R3342		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R3345-47		ERJ6GMYJ821	M.RESISTOR CH 1/10W 820	3	
R3352		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3353		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R3401		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3402		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R3403		ERJ6GMYG361	M.RESISTOR CH 1/10W 360	1	
R3404		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3405		ERJ6GMYG123	M.RESISTOR CH 1/10W 12K	1	
R3406		ERJ6GMYG512	M.RESISTOR CH 1/10W 5.1K	1	
R3407		ERJ6GMYG272	M.RESISTOR CH 1/10W 2.7K	1	
R3408		ERJ6GMYG302	M.RESISTOR CH 1/10W 3K	1	
R3409		ERJ6GMYG821	M.RESISTOR CH 1/10W 820	1	
R3410		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3411-13		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	3	
R3415		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3417		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3422		ERJ6GMYG333	M.RESISTOR CH 1/10W 33K	1	
R3423		ERJ6GMYG683	M.RESISTOR CH 1/10W 68K	1	
R3424		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3425		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R3426		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R3427		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3428		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R3429		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3430		ERJ6GMYJ823	M.RESISTOR CH 1/10W 82K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R3431		ERJ6GMYG821	M.RESISTOR CH 1/10W 820	1	
R3433		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3434		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3435		ERJ6GMYG302	M.RESISTOR CH 1/10W 3K	1	
R3436		ERJ6GMYG272	M.RESISTOR CH 1/10W 2.7K	1	
R3437		ERJ6GMYG512	M.RESISTOR CH 1/10W 5.1K	1	
R3438		ERJ6GMYG123	M.RESISTOR CH 1/10W 12K	1	
R3441		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R3442		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3443		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R3444,45		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	2	
R3446,47		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R3463		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3464		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3465		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R3466		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3467		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R3468,69		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	2	
R3470		ERJ6GMYG123	M.RESISTOR CH 1/10W 12K	1	
R3471		ERJ6GMYG512	M.RESISTOR CH 1/10W 5.1K	1	
R3472		ERJ6GMYG272	M.RESISTOR CH 1/10W 2.7K	1	
R3473		ERJ6GMYG302	M.RESISTOR CH 1/10W 3K	1	
R3474		ERJ6GMYG821	M.RESISTOR CH 1/10W 820	1	
R3475		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3476		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3477,78		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R3479		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3501		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3502		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R3503		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3504,05		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R3506		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R3507		ERJ6GMYG103	M.RESISTOR CH 1/10W 10K	1	
R3508		ERJ6GMYG332	M.RESISTOR CH 1/10W 3.3K	1	
R3509-11		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	3	
R3513,14		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	2	
R3515		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3516		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3517		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3518		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3519		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3520		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3521		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R3522		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3523		ERJ6GMYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R3524		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3525		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R3526		ERJ6GMYJ470	M.RESISTOR CH 1/10W 47	1	
R3601		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3602		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3603		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3604		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3605		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R3606		ERJ6GMYJ821	M.RESISTOR CH 1/10W 820	1	
R3607-12		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	6	
R3613		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R3614		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3616		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R3901-05		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	5	
R3906		ERDS1TJ750	C.RESISTOR 1/2W 75	1	
R3908,09		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	2	
R3910,11		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	2	
R3913		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R3914		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	1	
R3915		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R3916,17		ERDS2TJ181	C.RESISTOR 1/4W 180	2	
R3926		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3927,28		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R3929		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3930		ERJ6GMYJ112	M.RESISTOR CH 1/10W 1.1K	1	
R3931		ERJ6GMYJ123	M.RESISTOR CH 1/10W 12K	1	
R3932		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R3933		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R3934		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R3935		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R3936		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R3938		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R3945		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R3946		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R3950,51		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	2	
R3953		ERDS2TJ562	C.RESISTOR 1/4W 5.6K	1	
R3954		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R3955		ERJ6GMYJ123	M.RESISTOR CH 1/10W 12K	1	
R3956		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R3957-60		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	4	
R3961		ERJ6GMYJ750	M.RESISTOR CH 1/10W 75	1	
R3962		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R3963		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3964		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R3965		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3966		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3967		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3968		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4001,02		ERDS2TJ680	C.RESISTOR 1/4W 68	2	
R4003-08		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	6	
R4009		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R4010		ERJ6GMYG433	M.RESISTOR CH 1/10W 43K	1	
R4011		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R4012		ERJ6GMYJ242	M.RESISTOR CH 1/10W 2.4K	1	
R4013		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R4014		ERJ6GMYG100	M.RESISTOR CH 1/10W 10	1	
R4015		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R4020		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R4021		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R4022		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R4028		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R4029,30		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R4033		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R4034		ERJ6GMYG393	M.RESISTOR CH 1/10W 39K	1	
R4035		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
R4036		ERJ6GMYG393	M.RESISTOR CH 1/10W 39K	1	
R4501,02		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R4503		ERJ3GEYG223	M.RESISTOR CH 1/16W 22K	1	
R4504,05		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	2	
R4506,07		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	2	
R4508		ERJ3GEYG224	M.RESISTOR CH 1/16W 220K	1	
R4509		ERJ3GEYJ622	M.RESISTOR CH 1/16W 6.2K	1	
R4511		ERJ3GEYG273	M.RESISTOR CH 1/16W 27K	1	
R4512		VRE0071E163	M.RESISTOR CH 1/10W 16K	1	
R4513		ERJ3GEYG103	M.RESISTOR CH 1/16W 10K	1	
R4514,15		ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	2	
R4518,19		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	2	
R4522		ERJ3GEYJ225	M.RESISTOR CH 1/16W 2.2M	1	
R4527		VRE0071E333	M.RESISTOR 33K	1	
R4528		VRE0071E153	M.RESISTOR 15K	1	
R4529		ERJ3GEYG562	M.RESISTOR CH 1/16W 5.6K	1	
R4530		ERJ3GEYJ334	M.RESISTOR CH 1/16W 330K	1	
R4534		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R4535		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R4539		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R4541		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R4542		ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
R4543		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R4551,52		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	2	
R4553,54		ERJ3GEYJ273	M.RESISTOR CH 1/16W 27K	2	
R4558		ERJ3GEYG224	M.RESISTOR CH 1/16W 220K	1	
R4561		ERJ3GEYG273	M.RESISTOR CH 1/16W 27K	1	
R4562		VRE0034E10C	M.RESISTOR CH 1/10W	1	
R4563		ERJ3GEYG272	M.RESISTOR CH 1/16W 2.7K	1	
R4568,69		ERJ3GEYJ273	M.RESISTOR CH 1/16W 27K	2	
R4573		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R4577		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R4578		VRE0071E473	M.RESISTOR CH 1/10W 47K	1	
R4581		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R4583		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R4584		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R4585		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R4586		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R4587,88		ERJ3GEYJ273	M.RESISTOR CH 1/16W 27K	2	
R4591		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R4592		ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1	
R4593		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R4594		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R4596		ERJ3GEYG103	M.RESISTOR CH 1/16W 10K	1	
R4597		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R4598,99		ERJ3GEYG223	M.RESISTOR CH 1/16W 22K	2	
R4603		ERJ3GEYG183	M.RESISTOR CH 1/16W 18K	1	
R4606		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R4610		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R4611		ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
R4612		ERJ3GEYJ331	M.RESISTOR CH 1/16W 330	1	
R4613		ERJ3GEYJ394	M.RESISTOR CH 1/16W 390K	1	
R4615		ERJ3GEYJ133	M.RESISTOR CH 1/16W 13K	1	
R4616		ERJ3GEYJ105	M.RESISTOR CH 1/16W 1M	1	
R4638		ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R4649		ERJ3GEYJ470	M.RESISTOR CH 1/16W 47	1	
R4651		ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	1	
R4652		ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
R4653		ERJ3GEYJ221	M.RESISTOR CH 1/16W 220	1	
R4654		ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
R4655		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R4656		ERJ3GEYG243	M.RESISTOR CH 1/16W 24K	1	
R4657		ERJ3GEYJ392	M.RESISTOR CH 1/16W 3.9K	1	
R4666		ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R4671		ERJ3GEYG103	M.RESISTOR CH 1/16W 10K	1	
R4701		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	1	
R4702		ERJ6GMYJ821	M.RESISTOR CH 1/10W 820	1	
R4703		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R4704,05		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	2	
R4706		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R4707		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R4708		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4709		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R4710		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4711		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R4712		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R4713		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4714		ERJ6GMYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R4715		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R4716		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4717		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R4718		ERJ6GMYG753	M.RESISTOR CH 1/10W 75K	1	
R4719		ERJ6GMYG203	M.RESISTOR CH 1/10W 20K	1	
R4720,21		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	2	
R4722		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R4723		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R4724,25		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	2	
R4726		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R4901,02		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	2	
R4903,04		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	2	
R4905,06		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	2	
R4907,08		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	2	
R4909,10		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R4915-18		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	4	
R4921		ERJ6GMYG163	M.RESISTOR CH 1/10W 16K	1	
R4922,23		ERJ6GMYG433	M.RESISTOR CH 1/10W 43K	2	
R4924		ERJ6GMYG163	M.RESISTOR CH 1/10W 16K	1	
R4925		ERJ6GMYG473	M.RESISTOR CH 1/10W 47K	1	
R4926		ERJ6GMYG223	M.RESISTOR CH 1/10W 22K	1	
R4927,28		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	2	
R4929		ERJ6GMYG223	M.RESISTOR CH 1/10W 22K	1	
R4930		ERJ6GMYG473	M.RESISTOR CH 1/10W 47K	1	
R4931		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R6001		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6002,03		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	2	
R6004		EROS2CKG2000	M.RESISTOR 1/4W 200	1	
R6005		ERJ6GMYJ471	M.RESISTOR CH 1/10W 470	1	
R6006		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6007-09		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	3	
R6010,11		ERJ6GMYG223	M.RESISTOR CH 1/10W 22K	2	
R6012		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6013		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6015,16		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6017		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6018		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R6019		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6020,21		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6022-24		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	3	
R6025		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R6027		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R6028		ERJ6GMZOR00	M.RESISTOR CH 1/10W 0	1	
R6029		ERJ6GMYJ183	M.RESISTOR CH 1/10W 18K	1	
R6030		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R6031		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R6032,33		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	2	
R6034		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6035		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R6036		ERJ6GMYJ123	M.RESISTOR CH 1/10W 12K	1	
R6037,38		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	2	
R6039,40		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	2	
R6041		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	1	
R6042		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R6044-49		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	6	
R6050		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6051		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R6052		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R6053		ERJ6GMYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R6054		ERJ6GMZOR00	M.RESISTOR CH 1/10W 0	1	
R6055		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R6056,57		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	2	
R6058,59		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6060		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6061,62		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	2	
R6063		ERJ6GMYJ224	M.RESISTOR CH 1/10W 220K	1	
R6064		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R6066		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6067		ERJ6GMYJ181	M.RESISTOR CH 1/10W 180	1	
R6068-70		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	3	
R6071		ERDS2TJ391	C.RESISTOR 1/4W 390	1	
R6074		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R6075		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6076		ERJ6GMYJ563	M.RESISTOR CH 1/10W 56K	1	
R6077		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6078		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6079		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6081		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R6082		ERJ6GMYJ223	M.RESISTOR CH 1/10W 22K	1	
R6083-86		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	4	
R6087,88		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	2	
R6089,90		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6091		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6092,93		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	2	
R6094,95		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	2	
R6096		ERJ6GMYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R6097,98		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	2	
R6099		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R6100		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6101		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6102,03		ERJ6GMYJ272	M.RESISTOR CH 1/10W 2.7K	2	
R6104		ERJ6GMZOR00	M.RESISTOR CH 1/10W 0	1	
R6106,07		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R6108		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6109		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R6110		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6112		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R6113		ERJ6GMYJ472	M.RESISTOR CH 1/10W 4.7K	1	
R6114		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6116		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6118		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6120		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6122		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6123		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R6124		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R6125		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R7302		ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R7303		ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R7304		ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R7305		ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R7306		ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R7307		ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R7308		ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	
R7309		ERDS2TJ102	M.RESISTOR CH 1/4W 1K	1	
R7310		ERJ6GEYJ474	M.RESISTOR CH 1/10W 470K	1	
R7311		ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R7312		ERJ6GEYJ563	M.RESISTOR CH 1/10W 56K	1	
R7313		ERJ6GEYJ824	M.RESISTOR CH 1/10W 820K	1	
R7314,15		ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	2	
R7316		ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R7317		ERJ6GEYJ393	M.RESISTOR CH 1/10W 39K	1	
R7318		ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R7321		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7322		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R7323		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7324,25		ERJ6GEYJ271	M.RESISTOR CH 1/10W 270	2	
R7329		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R7330		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R7334-37		ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	4	
R7338		ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R7339		ERJ6GEYJ330	M.RESISTOR CH 1/10W 33	1	
R7340		ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R7341		ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R7342		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7345		ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R7346		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R7347		ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R7348		ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R7349		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R7351-53		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	3	
R7354,55		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	2	
R7403		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R7407,08		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	2	
R7410-12		ERJ6GMYJ221	M.RESISTOR CH 1/10W 220	3	
R7413		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R7414-19		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	6	
R7420		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R7421-23		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	3	
R7425		ERJ6GMYJ154	M.RESISTOR CH 1/10W 150K	1	
R7426		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R7427		ERJ6GMYJ561	M.RESISTOR CH 1/10W 560	1	
R7428		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R7429		ERJ6GMYJ151	M.RESISTOR CH 1/10W 150	1	
R7430		ERJ6GMYJ104	M.RESISTOR CH 1/10W 100K	1	
R7431-34		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	4	
R7435		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R7436		ERG1SJ222	M.RESISTOR 1W 2.2K	1	
R7437,38		ERJ6GMYJ683	M.RESISTOR CH 1/10W 68K	2	
R7440,41		ERJ6GMYJ151	M.RESISTOR CH 1/10W 150	2	
R7901		ERJ3GEYJ471	M.RESISTOR CH 1/16W 470	1	
R7902		ERJ3GEYJ821	M.RESISTOR CH 1/16W 820	1	
R7903		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R7904		ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R7905		ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R7906		ERJ6GEYJ150	M.RESISTOR CH 1/10W 15	1	
R7907		ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R7908		ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R7909-12		ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	4	
R7913-15		ERJ3GEYJ682	M.RESISTOR CH 1/16W 6.8K	3	
R7917		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	1	
R7918-21		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	4	
R7922		ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1	
R7923		ERJ3GEYJ394	M.RESISTOR CH 1/16W 390K	1	
R7924-26		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	3	
R7927		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R7928		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R7929		ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1	
R7930		ERJ3GEYJ394	M.RESISTOR CH 1/16W 390K	1	
R7931-33		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	3	
R7934		ERJ3GEYJ562	M.RESISTOR CH 1/16W 5.6K	1	
R7935		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	1	
R7936		ERJ3GEYJ223	M.RESISTOR CH 1/16W 22K	1	
R7937		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	1	
R7938		ERJ3GEYJ222	M.RESISTOR CH 1/16W 2.2K	1	
R7939		ERJ3GEYJ224	M.RESISTOR CH 1/16W 220K	1	
R7940		ERJ3GEYJ181	M.RESISTOR CH 1/16W 180	1	
R7941		ERJ3GEYJ681	M.RESISTOR CH 1/16W 680	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R7942		ERJ3GEYJ393	M.RESISTOR CH 1/16W 39K	1	
R7943		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	1	
R7944		ERJ3GEYJ392	M.RESISTOR CH 1/16W 3.9K	1	
R7945		ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	1	
R7946,47		ERJ3GEYJ473	M.RESISTOR CH 1/16W 47K	2	
R7948		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R7949		ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	1	
R7950		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R7951,52		ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	2	
R7953		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R7954,55		ERJ3GEYJ823	M.RESISTOR CH 1/16W 82K	2	
R7956		ERJ3GEYJ822	M.RESISTOR CH 1/16W 8.2K	1	
R7957		ERJ3GEYJ472	M.RESISTOR CH 1/16W 4.7K	1	
R7958,59		ERJ3GEYJ823	M.RESISTOR CH 1/16W 82K	2	
R7960,61		ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	2	
R7964		ERJ3GEYJ272	M.RESISTOR CH 1/16W 2.7K	1	
R7965-72		ERJ3GEYJ101	M.RESISTOR CH 1/16W 100	8	
R7973-77		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	5	
R7978		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R7979		ERJ3GEYJ152	M.RESISTOR CH 1/16W 1.5K	1	
R7980		ERJ3GEYJ104	M.RESISTOR CH 1/16W 100K	1	
R7981,82		ERJ3GEYJ102	M.RESISTOR CH 1/16W 1K	2	
R7983,84		ERJ3GEYJ103	M.RESISTOR CH 1/16W 10K	2	
R7985,86		ERJ3GEYJ271	M.RESISTOR CH 1/16W 270	2	
R7987		ERJ3GEYJ563	M.RESISTOR CH 1/16W 56K	1	
R7988		ERJ3GEYJ121	M.RESISTOR CH 1/16W 120	1	
R7989		ERDS2TJ823	C.RESISTOR 1/4W 82K	1	
RX3401		EXBF8E102J	COMBI. R-R	1	
SW3901		VSS0385	SWITCH	1	
T0703		EQV5EC071A	TRANSFORMER	1	
T0704		EQV5EC072A	TRANSFORMER	1	
T4701		VLT0695	TRANSFORMER	1	
T4702		VLT0696	TRANSFORMER	1	
T7301		EIR7QG001B	TRANSFORMER	1	
T7302,03		EIL7QH012Q	TRANSFORMER	2	
T7304		EIS5EC017A	TRANSFORMER	1	
T7305		EQS5EC033A	TRANSFORMER	1	
VR301		EVN49CA00B23	V.RESISTOR 2K	1	
VR302		EVN49CA00B13	V.RESISTOR	1	
VR303		EVNCBAA00B13	V.RESISTOR	1	
VR304		EVN49CA00B13	V.RESISTOR	1	
VR0701		EVNCBAA00B24	V.RESISTOR	1	
VR801,02		EVMEASA00B13	V.RESISTOR	2	
VR803		EVMEASA00B14	V.RESISTOR	1	
VR804		EVN49CA00B53	V.RESISTOR	1	
VR2001-05		EVNCYAA03B54	V.RESISTOR	5	
VR3001-03		EVNCYAA03B23	V.RESISTOR	3	
VR3301		EVMEASA00B24	V.RESISTOR	1	
VR3302		EVN49CA00B54	V.RESISTOR	1	
VR3304,05		EVN49CA00B52	V.RESISTOR 500	2	
VR3307		EVN49CA00B54	V.RESISTOR	1	
VR3901		EVMEASA00B24	V.RESISTOR	1	
VR4002		EVNCYAA03B25	V.RESISTOR	1	
VR4501		EVMECSA00B53	V.RESISTOR	1	
VR4502		EVMEASA00BY4	V.RESISTOR	1	
VR4507		EVMEASA00BY4	V.RESISTOR	1	
VR4509		EVMECSA00BY3	V.RESISTOR	1	
VR4512		EVNCBAA00B52	V.RESISTOR	1	
VR4550		EVMECSA00B14	V.RESISTOR	1	
VR4551,52		EVMEASA00B55	V.RESISTOR	2	
VR7301		EVMEASA00B14	V.RESISTOR	1	
VR7326		EVMEASA00B52	V.RESISTOR	1	
VR7328		EVMEASA00B52	V.RESISTOR	1	
VR7340		EVNCBAA00B14	V.RESISTOR	1	
VR7342		EVNCBAA00B53	V.RESISTOR	1	
VR7344		EVNCBAA00B14	V.RESISTOR	1	
VR7901,02		EVNCBAA00B14	V.RESISTOR	2	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
VR7903		EVTEASA00B55	V.RESISTOR	1	
X0701		VLF1178	CRYSTAL OSCILLATOR	1	
X0703		EFCT5R5MW5	CRYSTAL OSCILLATOR	1	
X0704		VLF1035	CRYSTAL OSCILLATOR	1	
X801		VSX0406	CRYSTAL OSCILLATOR	1	
X3302		EFOGC3584A5	CRYSTAL OSCILLATOR	1	
X3501		VSX0574	CRYSTAL OSCILLATOR	1	
X6001		VSX0583	CRYSTAL OSCILLATOR	1	
X6002		EFOEC7374T4E	CRYSTAL OSCILLATOR	1	
X7001		VSQ0565	CRYSTAL OSCILLATOR	1	
X7301,02		EFCT5R5MS5	CRYSTAL OSCILLATOR	2	
X7303,04		EFCT5R74MS5B	CRYSTAL OSCILLATOR	2	
X7305		ELB5A016	FILTER	1	
X7401		VSX0561	CRYSTAL OSCILLATOR	1	
X7901		VSX0514	CRYSTAL OSCILLATOR	1	
X7902		VSX0512	CRYSTAL OSCILLATOR	1	
X7903		EFCA5504BF	CRYSTAL OSCILLATOR	1	
			MISCELLANEOUS		
		VEE9564	EARTH WIRE	1	(TV DEMO-POWER
					SHIELD CASE)
		VJH0827	RF ANT TERMINAL PLATE	1	
		ENG47210G	TUNER	1	<!>
		VEE8682	WIRE CABLE	1	(P1001-P1102)
		VEE8683	WIRE CABLE	1	(P1002-P1103)
		VEE8688	WIRE CABLE	1	(P2001-P2902)
		VEE9001	WIRE CABLE	1	(POWER TR.-P2003)
		VEE8685	WIRE CABLE	1	(P4002-P6502)
		VEE8686	WIRE CABLE	1	(P6003-P7504)
		VEE8837	WIRE CABLE	1	(P3002-P7503)
		VEE9669	WIRE CABLE	1	(P4003-P1509)
		VWJ0775	FLAT CARD CABLE	1	(P2004-P1507)
		VWJ0776	FLAT CARD CABLE	1	(P3001-P501)
		VWJ0778	FLAT CARD CABLE	1	(P7401-P7501)
		VWJ0801	FLAT CARD CABLE	1	(P7402-P7502)
		VMA6768	EARTH ANGLE	1	
		VJF1031	CLAMPER	1	
		VMX2233	SPACER	1	FOR SUB Y/C C.B.A.
		VEJ1438	I/O JACK PLATE	1	FOR I/O PACK C.B.A.
		XTV3+8GFZ	SCREW	4	FOR I/O PACK C.B.A.
		VSC3553	SHIELD COVER (MAIN)	1	FOR NICAM C.B.A.
		VSC3554	SHIELD COVER (TOP)	1	FOR NICAM C.B.A.
		VSC3555	SHIELD COVER (BOTTOM)	1	FOR NICAM C.B.A.
		VMP4471	TV DEMODULATOR ANGLE	1	FOR TV DEMODU. C.B.A
	■	VEP05176L	HEAD AMP C.B.A.		(RTL)
C503		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
C505-08		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	4	
C509		ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	
C510,11		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C512		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C513		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C514		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C515,16		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C517,18		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C519,20		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C521		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C523		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C524		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C525		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C526		VCEA0JAC221	E.CAPACITOR 6.3V 220U	1	
C527		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C531		ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C532		ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C533,34		ECUM1H121JCN	C.CAPACITOR CH 50V 120P	2	
C535		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C536		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C537		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C538,39		ECUM1H680JCN	C.CAPACITOR CH 50V 68P	2	
C540		ECEA1CK470	E.CAPACITOR 16V 47U	1	
C551		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C552-54		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	3	
C555		ECEA0JPK221	E.CAPACTIOR 6.3V 220U	1	
C556,57		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C559		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
C560,61		ECUM1H471JCN	C.CAPACITOR CH 50V 470P	2	
C562,63		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
C564		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
C565		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C566		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C567		ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C569		ECUM1C105ZFN	C.CAPACITOR CH 16V 1U	1	
IC501		AN3336SB	IC	1	
IC502		AN3370K	IC	1	
IC551		BA7743FS	IC	1	
K501		VLP0145	COIL	1	
K502		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K503,04		VLP0145	COIL	2	
K505		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
K506		VLP0145	COIL	1	
K552		ERJ6GMZ0R00	M.RESISTOR CH 1/10W 0	1	
L501-03		VLQ0540K330	COIL 33UH	3	
L504		VLQ0540J5R6	COIL 5.6UH	1	
L551,52		VLQ0540K330	COIL 33UH	2	
P501		VJS3537B020G	CONNECTOR (FEMALE) 20P	1	
P502		VJS2603	CONNECTOR (FEMALE)	1	
Q501		MSB709	TRANSISTOR	1	
Q502		MSD601	TRANSISTOR	1	
QR501		MRN2404	TRANSISTOR-RESISTOR	1	
R501		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	1	
R502		ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R503		ERJ6GMYG752	M.RESISTOR CH 1/10W 7.5K	1	
R504		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R505		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R506		ERJ6GMYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R507		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R508		ERJ6GMYJ331	M.RESISTOR CH 1/10W 330	1	
R509-12		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	4	
R513		ERJ6GMYJ103	M.RESISTOR CH 1/10W 10K	1	
R514		ERJ6GMYJ274	M.RESISTOR CH 1/10W 270K	1	
R517		ERJ6GMYJ100	M.RESISTOR CH 1/10W 10	1	
R518,19		ERJ6GMYJ101	M.RESISTOR CH 1/10W 100	2	
R520		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R521,22		ERJ6GMYJ822	M.RESISTOR CH 1/10W 8.2K	2	
R523		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R524		VRE0034E182	M.RESISTOR CH 1/10W 1.8K	1	
R525		VRE0034E103	M.RESISTOR CH 1/10W 10K	1	
R526		ERJ6GMYG133	M.RESISTOR CH 1/10W 13K	1	
R551		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R552		ERJ6GMYJ391	M.RESISTOR CH 1/10W 390	1	
R553		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R554		ERJ6GMYJ243	M.RESISTOR CH 1/10W 24K	1	
R556		ERJ6GMYJ333	M.RESISTOR CH 1/10W 33K	1	
R557		ERJ6GMYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R558		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R559,60		ERJ6GMYJ152	M.RESISTOR CH 1/10W 1.5K	2	
R561		ERJ6GMYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R562		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
R563		VRE0034E100	M.RESISTOR CH 1/10W 10	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R564		ERJ6GMYJ224	M.RESISTOR CH 1/10W 220K	1	
R565		ERJ6GMYJ473	M.RESISTOR CH 1/10W 47K	1	
R566		ERJ6GMYJ273	M.RESISTOR CH 1/10W 27K	1	
R567		ERJ6GMYJ153	M.RESISTOR CH 1/10W 15K	1	
R568		ERJ6GMYJ271	M.RESISTOR CH 1/10W 270	1	
R569		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R570		ERJ6GMYJ102	M.RESISTOR CH 1/10W 1K	1	
			MISCELLANEOUS		
		VSC3714	SHIELD COVER (TOP)	1	
		VSC3478	SHIELD COVER (MAIN)	1	
		VSC3715	SHIELD COVER (BOTTOM)	1	
	■	VEP07739AA	TIMER C.B.A.		(RTL)
C1701		ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C1702		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C1703		ECKD2H471KB	C.CAPACITOR 500V 470P	1	
C1704		ECEA1VKA220	E.CAPACITOR 35V 22U	1	
C1705		ECKF1H103ZF	C.CAPACITOR 50V 0.01U	1	
C1706		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7501		ECRHC030E11	TRIMMER 3P	1	
C7502		ECEA0JKS330	E.CAPACITOR 6.3V 33U	1	
C7503		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7504		ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	1	
C7505,06		ECEA1EKS4R7	E.CAPACITOR 25V 4.7U	2	
C7507,08		ECUM1H473ZFN	C.CAPACITOR CH 50V 0.047U	2	
C7509		ECUM1H060DCN	C.CAPACITOR CH 50V 6P	1	
C7510		ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C7511		ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
C7512		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7513		ECEA0JKA221	E.CAPACITOR 6.3V 220U	1	
C7514,15		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C7517		ECEA0JKS470	E.CAPACITOR 6.3V 47U	1	
C7518		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7519-30		ECUM1H270JCN	C.CAPACITOR CH 50V 27P	12	
C7531,32		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	2	
C7533-36		ECUM1H270JCN	C.CAPACITOR CH 50V 27P	4	
C7537		ECEA1HKA220	E.CAPACITOR 50V 22U	1	
C7538		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	1	
C7539		ECUM1H561JCN	C.CAPACITOR CH 50V 560P	1	
D1701		MA1270-H	DIODE	1	
D1702		MA185	DIODE	1	
D7501		MA3075	DIODE	1	
D7502-06		MA221	DIODE	5	
D7510		MA221	DIODE	1	
D7512		MA221	DIODE	1	
D7514		MA221	DIODE	1	
D7517,18		MA221	DIODE	2	
D7520		MA221	DIODE	1	
D7522		MA221	DIODE	1	
D7526		MA221	DIODE	1	
D7532		MA221	DIODE	1	
D7534,35		MA221	DIODE	2	
D7546-53		MA221	DIODE	8	
D7556-61		LN81RCPHL	LED	6	
D7562,63		MA221	DIODE	2	
DP7501		VSL0276	DISPLAY TUBE	1	
IC7501		M37502V4CF	IC	1	
IC7502		PST7026	IC	1	
IC7503		XLJ9021B	IC	1	
IC7504		PST7043	IC	1	
IC7505		BA6810S	IC	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
K7502		ERJ6GMZOROO	M.RESISTOR CH 1/10W 0	1	
K7504,05		ERJ6GMZOROO	M.RESISTOR CH 1/10W 0	2	
L7501		VLQEL05S101K	COIL 100UH	1	
L7502		VLQ0188J330	COIL 33UH	1	
P7501,02		VJS3537A020G	CONNECTOR (FEMALE) 20P	2	
P7503		VJP3234B010	CONNECTOR (MALE) 10P	1	
P7504		VJP1246T	CONNECTOR (MALE) 6P	1	
P7505,06		VJS2183	CONNECTOR (FEMALE)	2	
PP7501,02		VJP3405A011W	CONNECTOR (MALE) 11P	2	
Q1701		2SD1994A	TRANSISTOR	1	
Q7501,02		MSD601	TRANSISTOR	2	
QR7501,02		MRN2403	TRANSISTOR-RESISTOR	2	
QR7503		MRN2402	TRANSISTOR-RESISTOR	1	
QR7506		MRN1402	TRANSISTOR-RESISTOR	1	
QR7507		MRN1404	TRANSISTOR-RESISTOR	1	
QR7508-11		MRN2404	TRANSISTOR-RESISTOR	4	
QR7512-14		MRN2403	TRANSISTOR-RESISTOR	3	
R1701		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R1702		ERDS2TJ101	C.RESISTOR 1/4W 100	1	
R1703		ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R7501,02		ERJ6GEYJ820	M.RESISTOR CH 1/10W 82	2	
R7503		ERJ6GEYG223	M.RESISTOR CH 1/10W 22K	1	
R7504		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R7505-07		ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	3	
R7508		ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R7509		ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	1	
R7510		ERJ6GEYK106	M.RESISTOR CH 1/10W 10M	1	
R7511		ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	1	
R7512,13		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R7514-16		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	3	
R7517,18		ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	2	
R7519-22		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	4	
R7525,26		ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	2	
R7527-30		ERJ6GMZOROO	M.RESISTOR CH 1/10W 0	4	
R7531-41		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	11	
R7542-56		ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	15	
R7557-59		ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	3	
R7561,62		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R7564		ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R7565		ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R7566		ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R7567		ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R7568		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7569		ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R7570		ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R7571		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7572		ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R7573		ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R7574		ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
RX7501,02		EXBF6E104J	RESISTOR-RESISTOR	2	
RX7503		EXBF8E104J	COMBI.R-R 100K	1	
SW7501,02		ESD172255	SWITCH	2	
SW7503		ESD172355	SWITCH	1	
SW7504-07		ESD172255	SWITCH	4	
SW7508,09		ESD172355	SWITCH	2	
T1701		ETE13K80AY	TRANSFORMER	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
VR4004		EVNCBAA00B53	V.RESISTOR	1	
X7501		VSX0506	CRYSTAL OSCILLATOR	1	
X7502		VSX0094	CRYSTAL OSCILLATOR	1	
			MISCELLANEOUS		
		VMD0504	LED HOLDER	6	
		VJF1043	FIP HOLDER	1	
	■	VEP06B45A	VR C.B.A.		(RTL)
C6501,02		ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	2	
C6503,04		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	2	
C6505		ECEA1HKA3R3	E.CAPACITOR 50V 3.3U	1	
C6506		VCEA1HAC3R3	E.CAPACITOR 50V 3.3U	1	
C6507		ECEA1AKA330	E.CAPACITOR 10V 33U	1	
C6508		ECEA1CKA330	E.CAPACITOR 16V 33U	1	
C6509		ECUM1H103ZFN	C.CAPACITOR CH 50V 0.01U	1	
C6510		ECEA0JK470	E.CAPACITOR 6.3V 47U	1	
C6511-14		ECUM1H104ZFN	C.CAPACITOR CH 50V 0.1U	4	
C6515,16		ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
C6518		ECUM1H472KBN	C.CAPACITOR CH 50V 4700P	1	
C6519		ECKF1H472KB	C.CAPACITOR 50V 4700P	1	
IC6501		VCR0172	IC	1	
IR6501		VEK6407	IR RECEIVER UNIT	1	
L6501,02		ELESE471KA	COIL	2	
L6503,04		ELESE221KA	COIL 220UH	2	
L6506,07		ELESE101KA	COIL 100UH	2	
LB6501		VLP0145	COIL	1	
LB6502		VLP0150	INDUCTOR	1	
P6502		VJP1251T	CONNECTOR (MALE) 11P	1	
PS6501,02		VJS3405A011A	CONNECTOR (FEMALE) 11P	2	
R6501		ERJ6GEYG332	M.RESISTOR CH 1/10W 3.3K	1	
R6502		ERJ6GEYG331	M.RESISTOR CH 1/10W 330	1	
R6503,04		ERJ6GEYG271	M.RESISTOR CH 1/10W 270	2	
R6505		ERJ6GEYG332	M.RESISTOR CH 1/10W 3.3K	1	
R6506		ERJ6GEYG331	M.RESISTOR CH 1/10W 330	1	
R6508,09		ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	2	
R6511		ERDS2TYJ470	C.RESISTOR	1	
S6501,02		EVQ11409K	SWITCH	2	
VR6501		EWAKABX15C23	V.RESISTOR	1	
VR6502		EWAKFKX15B24	V.RESISTOR	1	
VR6503		EWANYJX1054J	V.RESISTOR	1	
			MISCELLANEOUS		
		VEJ1429	FRONT JACK	1	
		VYC0599	HIFI REC VR COVER UNIT	1	
		VGU4495	HIFI REC VR KNOB	2	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
	■	VEP01558C	POWER C.B.A.		(RTL) <!>
C1103		VCC0021	C.CAPACITOR	1	<!>
C1106		VCC0021	C.CAPACITOR	1	<!>
C1109		VCC0023	C.CAPACITOR	1	<!>
C1110		ECQU2A224MN	P.CAPACITOR 250V 0.22U	1	<!>
C1111		ECQU2A154MNB	P.CAPACITOR 250V 0.15U	1	<!>
C1112		ECEC2GG680	E.CAPACITOR 400V 68U	1	
C1113		ECQE6473KF	P.CAPACITOR 630V 0.047U	1	
C1114		VCK0106K121	C.CAPACITOR	1	
C1115		ECA1VXLV470	E.CAPACITOR 35V 47U	1	
C1116		ECA1CXLV101	E.CAPACITOR 16V 100U	1	
C1117		ECKF1H102KB	C.CAPACITOR 50V 1000P	1	
C1118		ECKF1H271KB	C.CAPACITOR 50V 270P	1	
C1121		ECCD2H101J	C.CAPACITOR 500V 100P	1	
C1123		ECEA1JFE560	E.CAPACITOR 63V 56U	1	
C1124		ECEA1CFE331	E.CAPACITOR 16V 330U	1	
C1125		ECEA1DFZ681	E.CAPACITOR 20V 680U	1	
C1126		ECEA1AFZ681	E.CAPACITOR 10V 680U	1	
C1127		ECEA1JFE470	E.CAPACITOR 63V 47U	1	
C1128		ECEA1CFE121	E.CAPACITOR 16V 120U	1	
C1129		ECEA1DFZ681	E.CAPACITOR 20V 680U	1	
C1130		ECEA1AFZ681	E.CAPACITOR 10V 680U	1	
C1131-34		ECKF1H102ZF	C.CAPACITOR 50V 1000P	4	
C1135,36		ECA1CGE101X	E.CAPACITOR 16V 100U	2	
C1139		ECKF1H103ZF	C.CAPACITOR 50V 0.01U	1	
C1140,41		ECA1CGE101X	E.CAPACITOR 16V 100U	2	
D1102		EM1B	DIODE	1	<!>
D1103		AP01C	DIODE	1	
D1104		MA178	DIODE	1	
D1105		1SS254	DIODE	1	
D1106		MA4200H	DIODE	1	
D1107		MA723VT	DIODE	1	
D1108		10ELS2	DIODE	1	
D1109		MA185	DIODE	1	
D1110		FMLG12SP	DIODE	1	
D1111		FMBG14L	DIODE	1	
D1112		SV03YS	DIODE	1	
D1115-17		EM1B	DIODE	3	<!>
D1118		MA4056-L	DIODE	1	
D1119		1SS254	DIODE	1	
D1120		MA4120H	DIODE	1	
D1121,22		1SS254	DIODE	2	
IC1101		STRM6547LF	IC	1	<!>
IC1103		SI3120C	IC	1	
IC1104		SI-3050CA	DIODE	1	
L1101,02		ELF18D221F	COIL	2	<!>
L1103-09		EXCELSA35	COIL	7	
L1110		VLP0074	COIL	1	
L1111,12		ELESE101KA	COIL 100UH	2	
L1113,14		ELC07B009	COIL	2	
L1115,16		VLP0083	COIL	2	
P1101		VJS2625	AC INLET	1	<!>
P1102		VJP1930T	CONNECTOR (MALE)	1	
P1103		VJP1149	CONNECTOR (MALE) 3P	1	
Q1101		PC120FY	TRANSISTOR	1	<!>
Q1102		2SD1996-R	TRANSISTOR	1	
R1101		ERC12AGM334	S.RESISTOR 1/2W 330K	1	
R1102		VRE0087	M.RESISTOR 1/16W	1	
R1103		ERG3SJ823	M.RESISTOR 1/16W 82K	1	
R1104,05		ERDS2FJ224	C.RESISTOR 1/4W 220K	2	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R1106		ERDS2FJ221	C.RESISTOR 1/4W 220	1	
R1109		ERDS2FJ561	C.RESISTOR 1/4W 560	1	
R1110		ERDS2FJ391	C.RESISTOR 1/4W 390	1	
R1111		ERX1SJ1R5	M.RESISTOR 1W 1.5	1	
R1112		ERDS2FJ103	C.RESISTOR 1/4W 10K	1	
R1113		ERDS2FJ682	C.RESISTOR 1/4W 6.8K	1	
R1114		ERDS2FJ101	C.RESISTOR 1/4W 100	1	
R1115		ERDS2TJ271	C.RESISTOR 1/4W 270	1	
R1122		EROS2CKG62R0	M.RESISTOR 1/4W 62	1	
R1123		EROS2CKG3001	M.RESISTOR 1/4W 3K	1	
R1124		EROS2CKG20R0	M.RESISTOR 1/4W 20	1	
R1125		EROS2CKG1201	M.RESISTOR 1/4W 1.2K	1	
R1126		ERDS1TJ562	C.RESISTOR 1/2W 5.6K	1	
R1127		ERDS2FJ224	C.RESISTOR 1/4W 220K	1	
T1101		VLT0718	TRANSFORMER	1	<!>
			MISCELLANEOUS		
		VJF0318	FUSE HOLDER	2	<!>
		VMZ2212	CAPACITOR COVER	3	<!>
	■	----------	MECHANISM CONNECTION C.B.A.		(RTL)
D1501		LN59L.VT	LED	1	
IC1501,02		ON1387	PHOTO INTERRUPTER	2	
P1503		VJS3316A002	CONNECTOR (FEMALE) 2P	1	
P1504		VJS3820	CONNECTOR (FEMALE)	1	
P1505		VJS3537B014G	CONNECTOR (FEMALE) 14P	1	
Q1501		PT493F1MN	TRANSISTOR	1	
Q1502		PN205L-NC.VT	PHOTO TRANSISTOR	1	
SW1501		VES0695	S-TAB SW	1	
SW1502		VST0176	S-VHS CASSETTE SW	1	
			MISCELLANEOUS		
		VMD2029	REEL GUIDE	1	
		VMD1926	LED HOLDER	1	D1501
		VMD1927	PHOTO TR. HOLDER	1	Q1502
	■	VEX0235	CYLINDER DRIVE C.B.A.		(RTL)
C2901-03		ECEA1VSN2R2	E.CAPACITOR 35V 2.2U	3	
C2904-06		ECUM1E104KBM	C.CAPACITOR CH 25V 0.1U	3	
C2907		ECUM1E683KBM	C.CAPACITOR CH 25V 0.068U	1	
C2908		ECUM1E473KBM	C.CAPACITOR CH 25V 0.047U	1	
C2910		ECEA1CKS100	E.CAPACITOR 16V 10U	1	
C2912		ECEA0JKS220	E.CAPACITOR 6.3V 22U	1	
IC2901		AN3815K	IC	1	
P2901		VJP2603W	CONNECTOR (MALE) 12P	1	
P2902		VJP1232T	CONNECTOR (MALE) 5P	1	
R2901		ERX12SJR47	M.RESISTOR CH 1/2W 0.47	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
TH2901		VRH0017	THERMISTOR	1	
			MISCELLANEOUS		
		VMA9138	MAIN HOLDER	1	
	■	----------	MOTOR C.B.A.		
			MISCELLANEOUS		
		VJP3316B002	CONNECTOR (FEMALE) 2P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks

INTERNAL REFERENCE CODES

NOTE: This chart is only for internal reference.
Do not order any parts according to these codes.

P.C.B.	FILM CODE
SYUGO (MAIN/SUB A/CAP DR)	HOAO00-0344A
MAIN	HOAO00-03C01
SUB AUDIO	HOAO00-04417
SYUGO (L & C/SUB L & C)	HOAO01-0242A
LUMINANCE & CHROMINANCE	HOAO01-03A61
SUB LUMI & CHRO	HOAO01-03A62
INPUT & OUTPUT	HOAO00-03A72
TV DEMODULATOR	HOAO00-07801
NICAM DECODER	HOAO00-07675
HEAD AMP	HOAO04-05176
HI-FI AUDIO	HOAO00-04447
VR	HOAO00-06B45
TIMER	HOAO00-07739
REC RF AMP	HOAO00-03A90
MECHA CONNECTION	HOAO00-00T87
CYLINDER DRIVE	HOAO00-00X69
PDC	HOAO00-07709

Panasonic

MATSUSHITA ELECTRIC

Printed in Japan